


---

# INSTALLATION INSTRUCTIONS

---

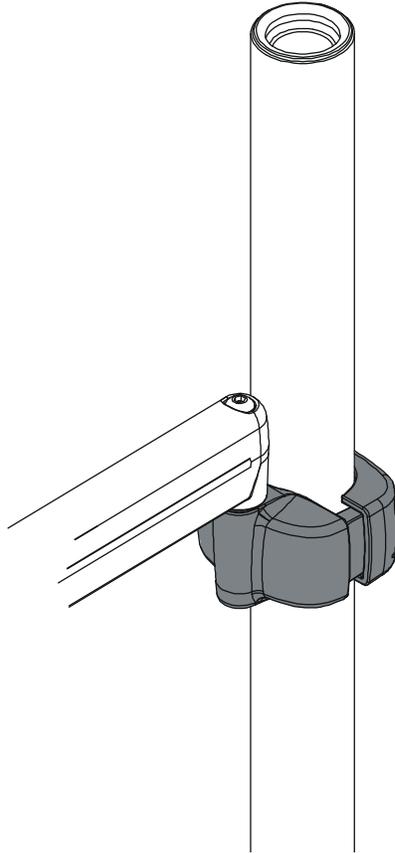

---

## Pole Clamp Accessory

---

**DISCLAIMER**

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

**! IMPORTANT WARNINGS AND CAUTIONS!**

**! WARNING:** A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.


**! CAUTION:** A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

**! WARNING:** Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.



**! WARNING:** Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.

**! WARNING:** Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the KSA1017 does not exceed 40 lbs (18.1 kg) AND does not exceed the weight capacity of the mount attached to it. Use with products heavier than the maximum weight indicated may result in collapse of the mount and its accessories causing possible injury.


**DIMENSIONS**

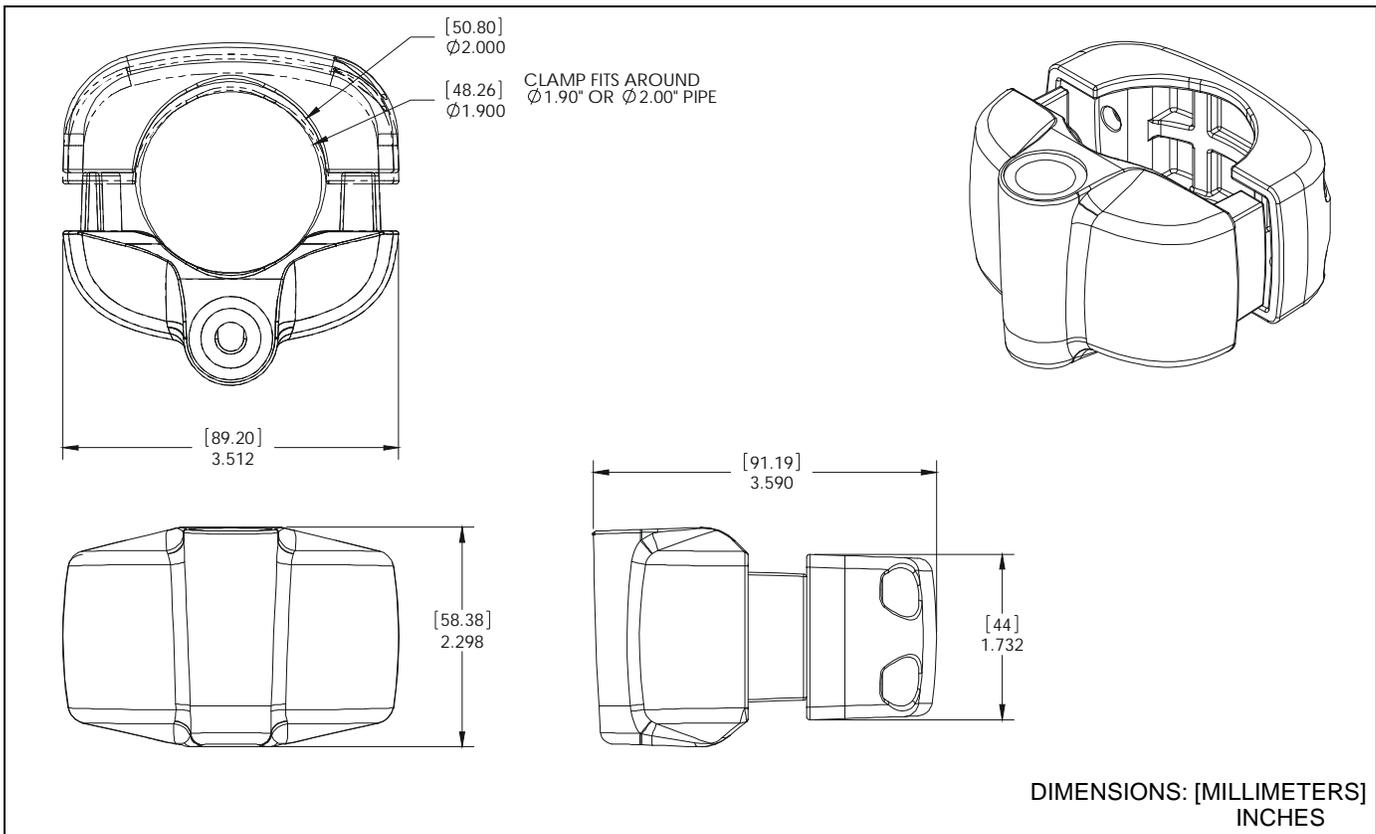


**LEGEND**

	<b>Tighten Fastener</b>		<b>Hex-Head Wrench</b>
	Apretar elemento de fijación		Llave de cabeza hexagonal
	Befestigungsteil festziehen		Sechskantschlüssel
	Apertar fixador		Chave de cabeça sextavada
	Serrare il fissaggio		Chiave esagonale
	Bevestiging vastdraaien		Zeskantsleutel
Serrez les fixations	Clé à tête hexagonale		
	<b>Loosen Fastener</b>		<b>Adjust</b>
	Aflojar elemento de fijación		Ajustar
	Befestigungsteil lösen		Einstellen
	Desapertar fixador		Ajustar
	Allentare il fissaggio		Regolare
	Bevestiging losdraaien		Afstellen
Desserrez les fixations	Ajuster		

**TOOLS REQUIRED FOR INSTALLATION**

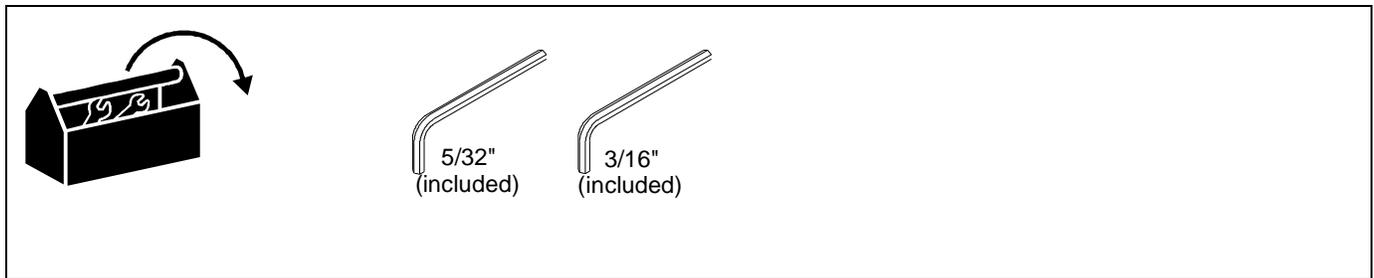

**PARTS**

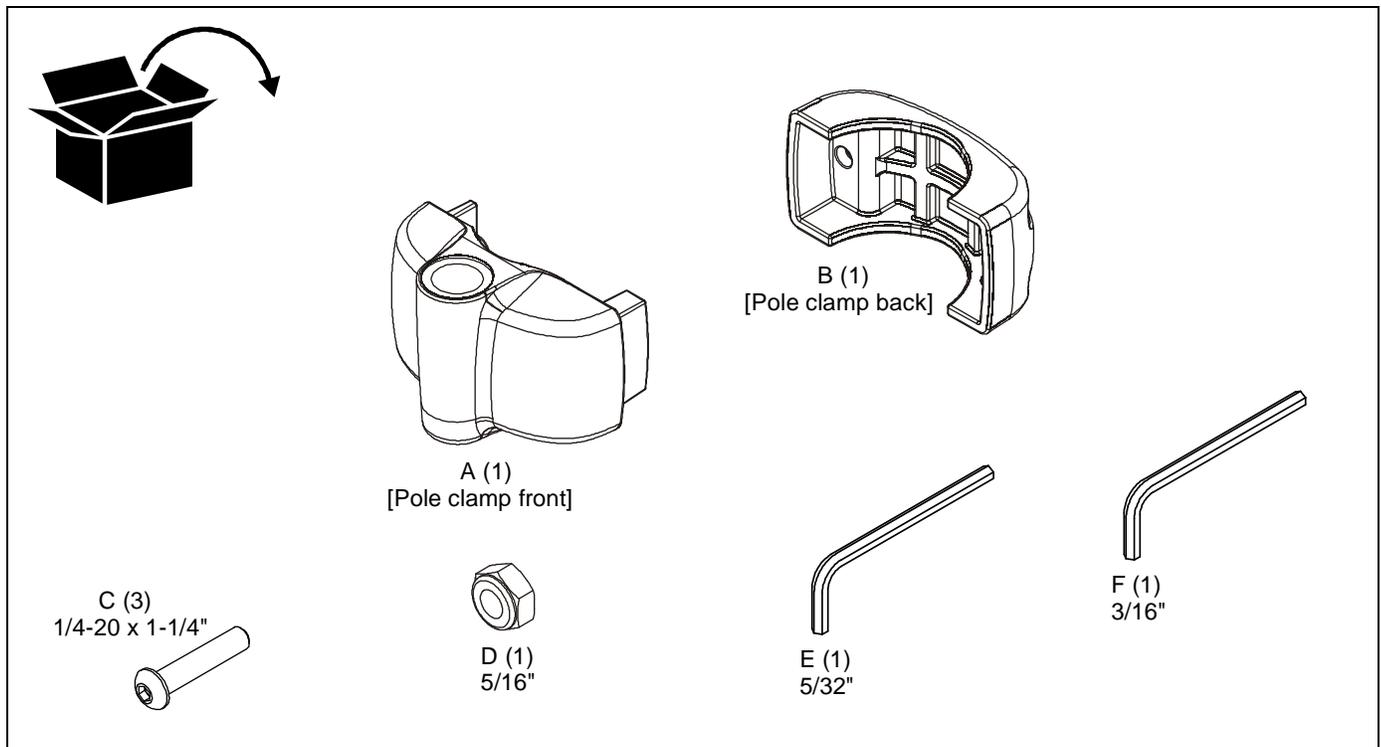


## ASSEMBLY AND INSTALLATION

The KSA-1017 Pole Clamp Accessory is used to provide a means for attaching a desktop or wall mount to a 1-1/2" to 2" pole.

### Existing Mount Preparation

**NOTE:** The existing mount needs to be modified before installing the KSA1017.

1. Remove display (if present) from existing mount following the instructions included with the mount.
2. Loosen button head cap screw securing swing arm to base on existing mount using the 3/16" hex key (F). (See Figure 1)

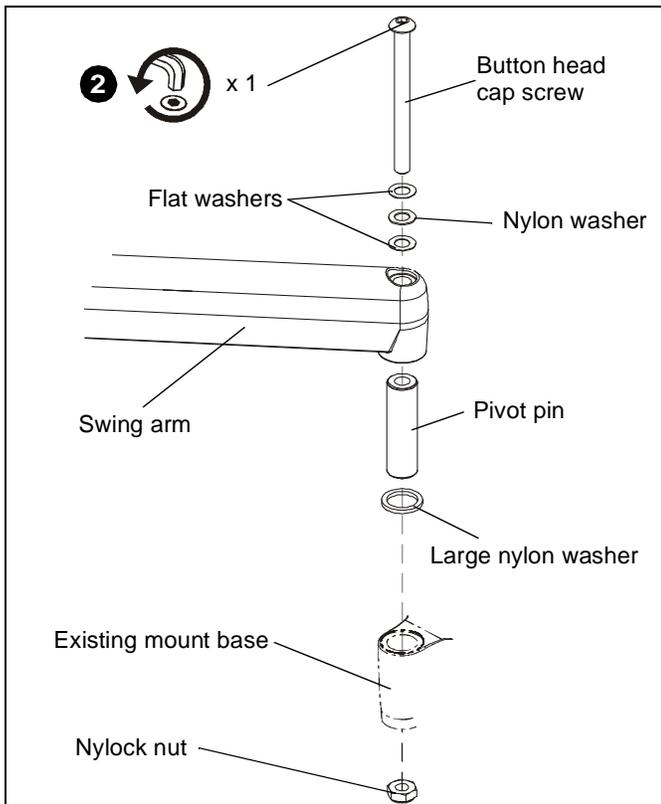

**Figure 1**


3. Remove and save button head cap screw, one nylon washer, and two flat washers from swing arm. (See Figure 1)
4. Lift swing arm up and off of pivot pin and set aside for reuse. (See Figure 1)
5. Remove and save large nylon washer and pivot pin, and discard nylock nut from existing mount base. (See Figure 1)

### Pole Clamp Installation

1. Insert 5/16" nylock nut (D) crown down into pole clamp front. (See Figure 2)

**NOTE:** The following steps reuse hardware removed and saved in the **Existing Mount Preparation** section.


2. Place large nylon washer into seat in pole clamp front (A). (See Figure 2)
3. Slide pivot pin through large nylon washer and down into pole clamp front (A). (See Figure 3)

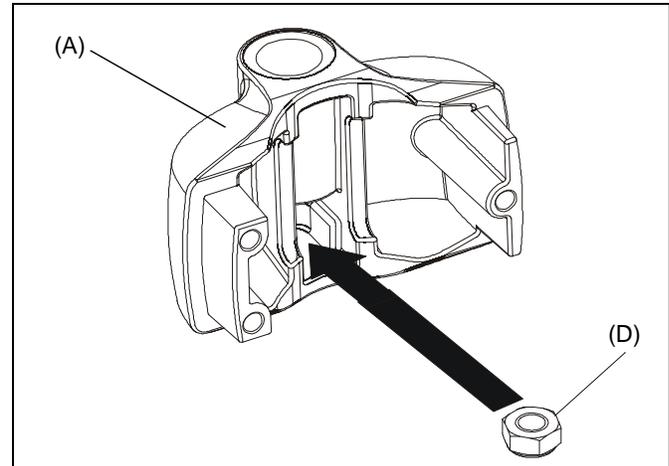

**Figure 2**

4. Slide swing arm assembly down onto top of pivot pin.
5. Assemble two flat washers and one nylon washer onto button head cap screw. (See Figure 3)
6. While holding 5/16" nylock nut (D) previously installed into pole clamp front (A), slide button head cap screw with washers through swing arm and down into pole clamp front (A) until contact with 5/16" nylock nut (D) is made.
7. Secure swing arm to pole clamp front (A) by fastening button head cap screw into 5/16" nylock nut (D).

**NOTE:** It may be necessary to move 5/16" nylock nut (D) slightly in order to allow button head cap screw to properly seat in nut and allow tightening.

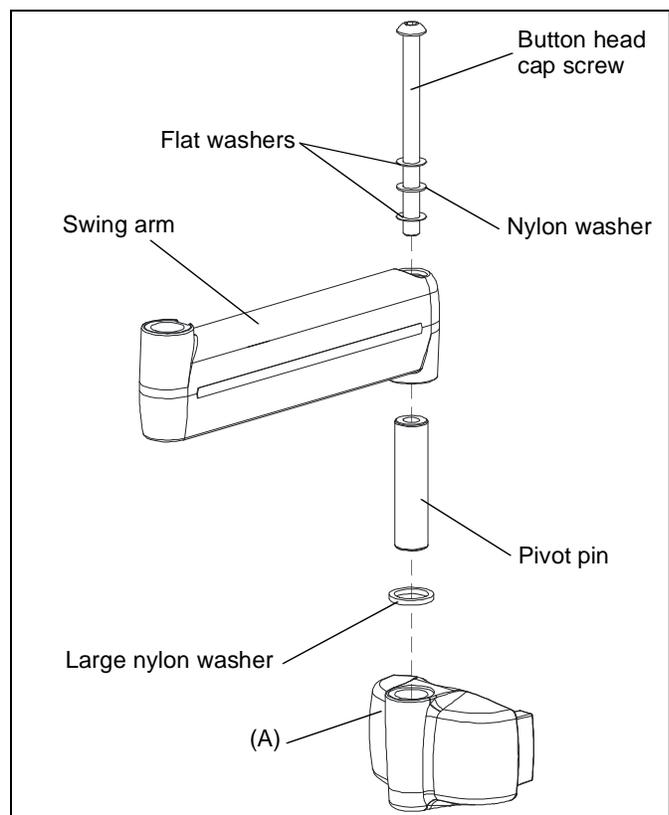

**Figure 3**

8. Place pole mount clamp (A) with swing arm against pole in approximate mounting location. (See Figure 4)
9. Loosely fasten three 1/4-20 x 1-1/4" button head cap screws (C) into pole clamp back (B) and place against pole aligning with pole clamp front (A). (See Figure 4)

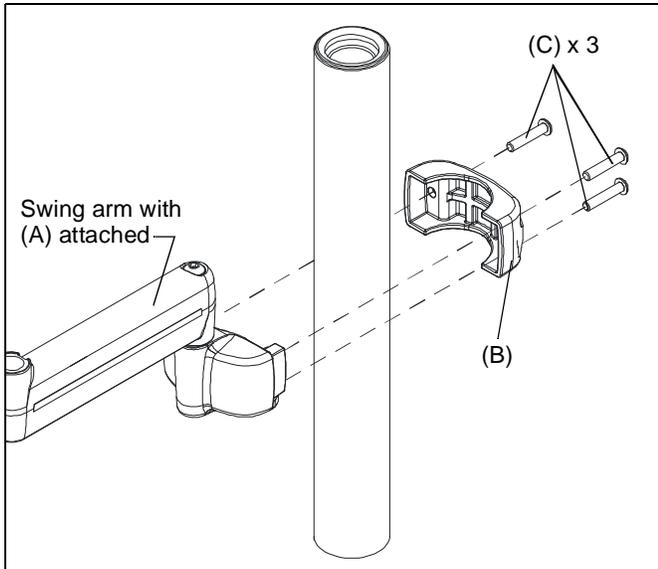


Figure 4

**IMPORTANT !** : Equally tighten screws (C) against pole clamp front (A) and the pole clamp back (B). (See Figure 5)

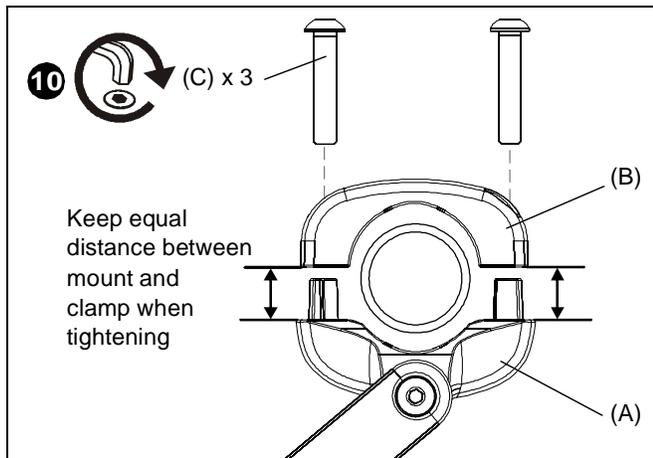


Figure 5

10. Secure pole clamp back (B) to pole clamp front (A) and pole by tightening three 1/4-20 x 1-1/4" button head cap screws (C) using 5/32" hex key. (See Figure 5)
11. Reattach display following instructions included with the mount.

**Adjustments**

The KSA-1017 allows for both vertical and horizontal position adjustment on pole.

1. Loosen single (right) rear button head cap screw (C) on pole clamp back (B). (See Figure 6)
2. Move KSA-1017 to desired position. (See Figure 6)
3. Tighten single (right) rear button head cap screw (C) on pole clamp back (B).



**CAUTION:** ALWAYS use two people when adjusting KSA-1017 position.

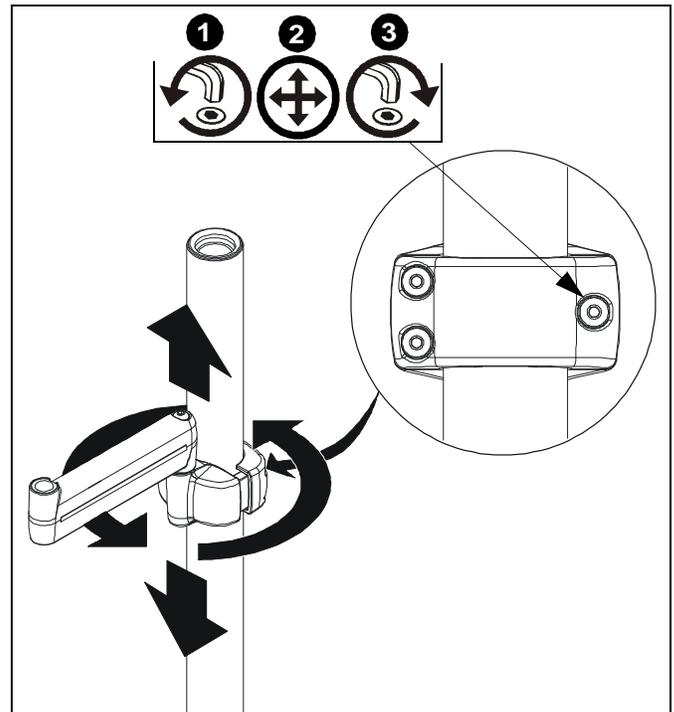


Figure 6







Our Mounts. **Your Vision.**

Chief Manufacturing, a products division  
of Milestone AV Technologies

8807-000043 RevB  
©2010 Milestone AV Technologies, a  
Duchossois Group Company  
[www.chiefmfg.com](http://www.chiefmfg.com)  
06/10

<b>USA/International</b>	<b>A</b> 8401 Eagle Creek Parkway, Savage, MN 55378 <b>P</b> 800.582.6480 / 952.894.6280 <b>F</b> 877.894.6918 / 952.894.6918
<b>Europe</b>	<b>A</b> Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands <b>P</b> +31 (0)40 2668620 <b>F</b> +31 (0)40 2668615
<b>Asia Pacific</b>	<b>A</b> Office No. 1 on 12/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong <b>P</b> 852 2145 4099 <b>F</b> 852 2145 4477

