

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PREMIER MOUNTS DIVISION OF <PMPI> ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF PREMIER MOUNTS DIVISION OF <PMPI> IS PROHIBITED.

ANCHOR SIZE

WOOD INSTALLATION



(6) 5/16" X 3" LG
SAE 1035 MEDIUM
CARBON STEEL
LAG BOLTS &
5/16" USS LOW CARBON
STEEL FLAT WASHERS

SOLID CONCRETE

(6) 5/16" X 3" LG
SAE 1035 MEDIUM
CARBON STEEL
LAG BOLTS &
5/16" USS LOW CARBON
STEEL FLAT WASHERS &
SOLID BLOCK AND BRICK
M10 X 60 NYLON ORANGE ANCHOR



POST-LEVELING
ADJUSTMENT SCREWS

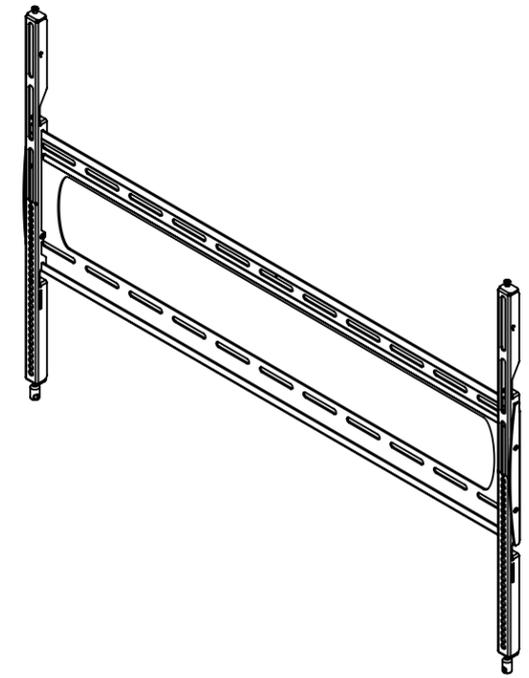

MAX VESA



ANCHOR POINTS


.406 [10.3]



OPEN AREA FOR POWER/SIGNAL OR
IN-WALL BOXES



MAX VESA

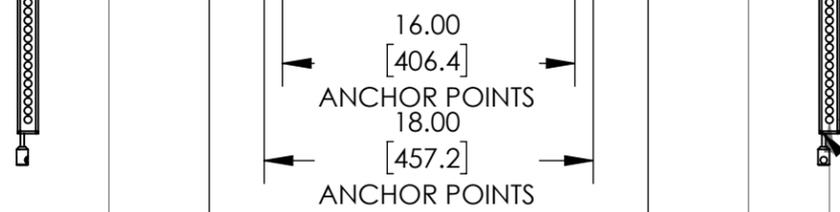

ANCHOR POINTS

18.00 [457.2]

ANCHOR POINTS

24.00 [609.6]

ANCHOR POINTS




34.98 [888.6]

ANCHOR POINTS



.96 [24.4]

(OPTION) BACK PLATE
MAY BE BOLTED SIDE BY SIDE
FOR VIDEO WALL APPLICATION

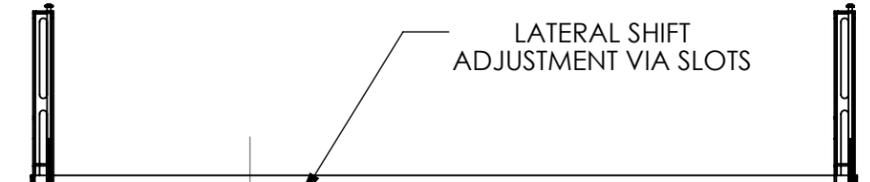

LATERAL SHIFT
ADJUSTMENT VIA SLOTS



5.76 [146.4]



43.06 [1093.6]

LOCKING SCREWS



Ø .350 [8.9]

LATERAL ADJUSTMENT
VIA MOUNTING BRACKETS

Ø .406 [10.3]

WEIGHT CAPACITY: 300 LBS
DIMENSION ARE IN INCH AND [MM]



1321 South State College Blvd
Fullerton Ca, 92831
P. 800.368.9700 - F. 800.832.4888

ITEM DESCRIPTION:

LOW PROFILE MOUNT

SIZE
B



DWG. NO.

P5080F

SCALE: 1:10

SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PREMIER MOUNTS DIVISION OF <PMPI> ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF PREMIER MOUNTS DIVISION OF <PMPI> IS PROHIBITED.

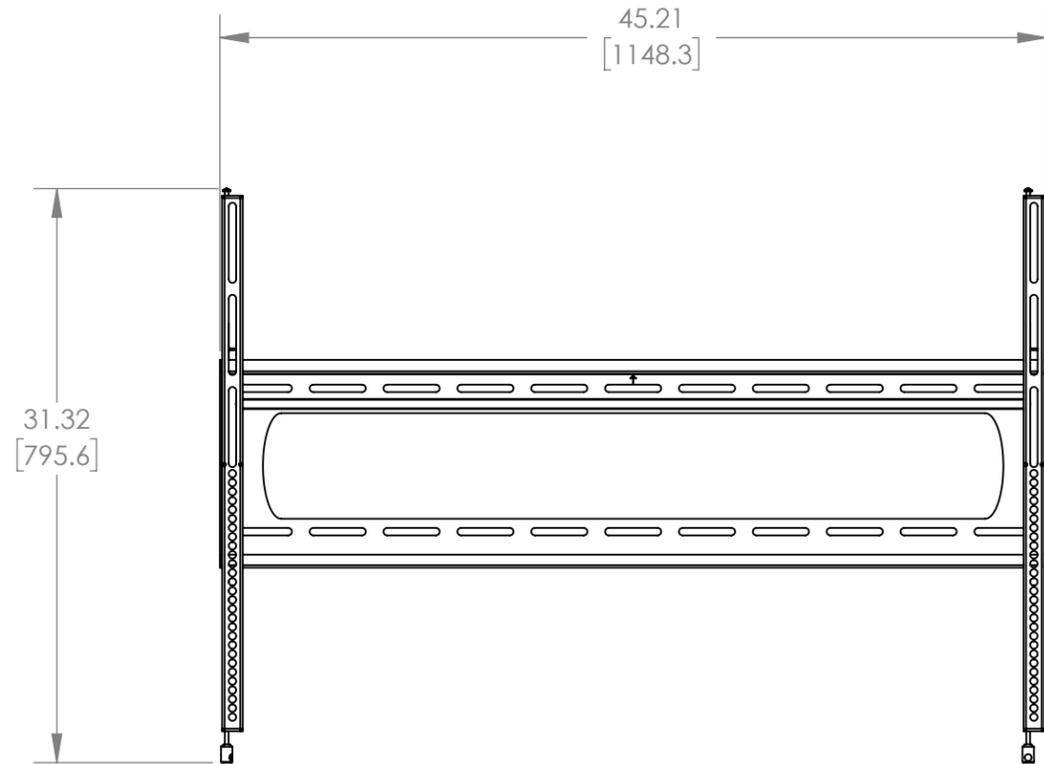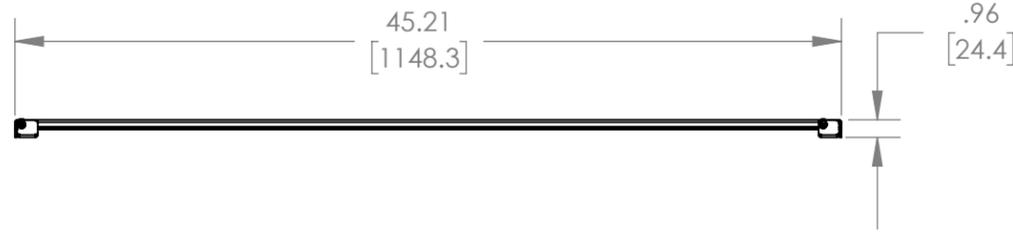

12 GA (.104") ASTM 1008 COLD ROLLED STEEL MATERIAL

12 GA (.104") ASTM 1008 COLD ROLLED STEEL MATERIAL

.33
[8.4]

1.23
[31.2]

OSHDP
Office of Statewide Health
Planning and Development

OPM CERT. #: OPM-0412-13



1321 South State College Blvd
Fullerton Ca, 92831
P. 800.368.9700 - F. 800.832.4888

ITEM DESCRIPTION:
LOW PROFILE MOUNT

SIZE B DWG. NO. P5080F

SCALE: 1:10 SHEET 1 OF 1