


INSTALLATION INSTRUCTIONS

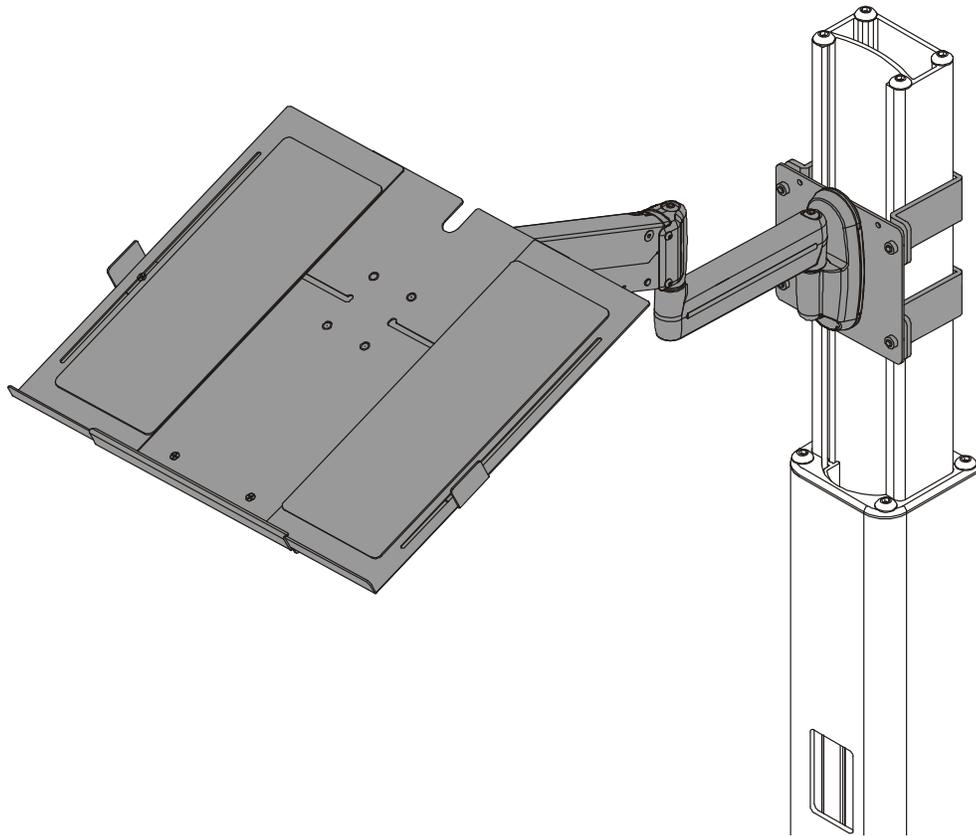

Music Stand Laptop Tray

DISCLAIMER

Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.



WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components and accessories does not exceed 15 lbs (6.8 kg).



IMPORTANT WARNINGS AND CAUTIONS!




WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.





CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.


DIMENSIONS

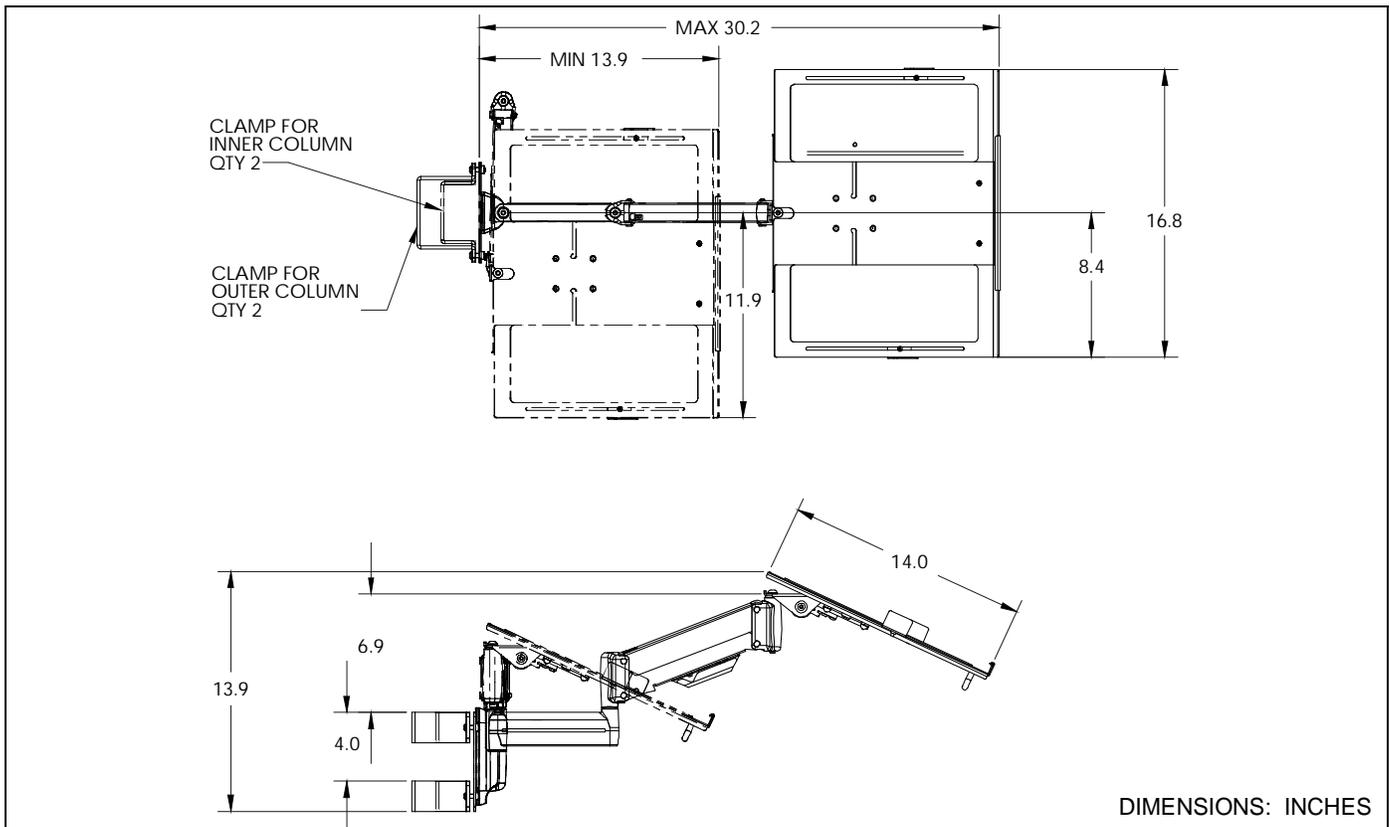


LEGEND

	Tighten Fastener		Phillips Screwdriver
	Apretar elemento de fijación		Destornillador Phillips
	Befestigungsteil festziehen		Kreuzschlitzschraubendreher
	Apertar fixador		Chave de fendas Phillips
	Serrare il fissaggio		Cacciavite a stella
	Bevestiging vastdraaien		Kruiskopschroevendraaier
Serrez les fixations	Tournevis à pointe cruciforme		
	Loosen Fastener		Hex-Head Wrench
	Afajar elemento de fijación		Llave de cabeza hexagonal
	Befestigungsteil lösen		Sechskantschlüssel
	Desapertar fixador		Chave de cabeça sextavada
	Allentare il fissaggio		Chiave esagonale
	Bevestiging losdraaien		Zeskantsleutel
Desserrez les fixations	Clé à tête hexagonale		

TOOLS REQUIRED FOR INSTALLATION

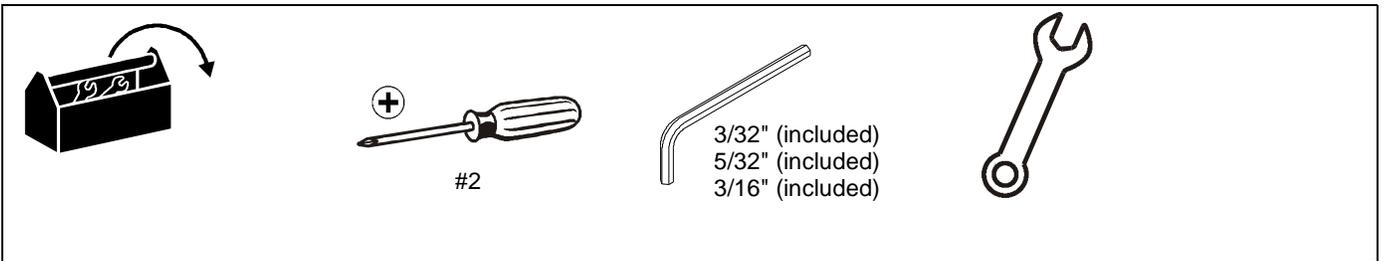

PARTS

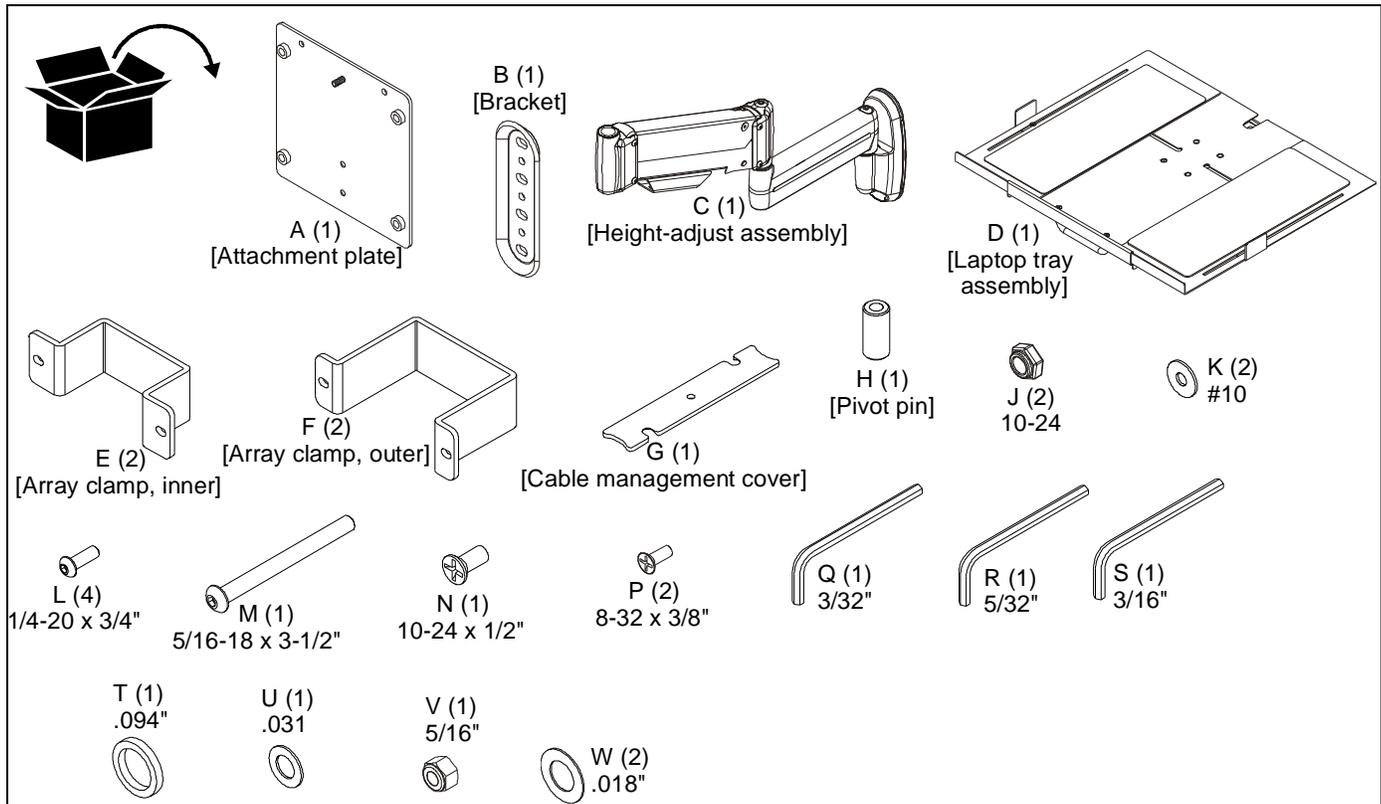

ASSEMBLY AND INSTALLATION

Assembling Height-Adjust Arm to Cart/Stand



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! DO NOT substitute hardware! Use only hardware provided by manufacturer.



WARNING: EXCEEDING MAXIMUM WEIGHT CAPACITY MAY LEAD TO SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! It is the user's responsibility to ensure the total amount of weight placed on the laptop stand does not exceed 15 lbs (6.8 kg).

1. Align bracket (B) with attachment plate (A), lining up rivet on attachment plate with top mounting hole on bracket.
2. Fasten bracket (B) to attachment plate (A) using one 10-24 x 1/2" Phillips undercut metal screw (N), two #10 flat washers (K) and two 10-24 nylon locknuts (J). (See Figure 1)

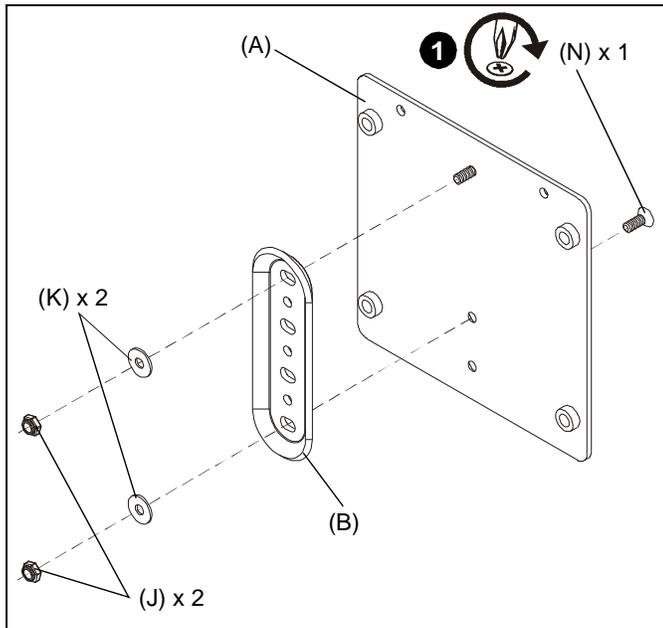


Figure 1

3. Choose appropriate array clamps to complete bracket assembly to cart/stand.
 - Array clamp, outer (F) is used to attach height-adjust assembly (C) to OUTER column of cart/stand (below adjustment knob).
 - Array clamp, inner (E) is used to attach height-adjust assembly (C) to INNER column of cart/stand (above adjustment knob).
4. Attach two array clamps (E or F) around cart/stand column to attachment plate assembly using four 1/4-20 x 3/4" button head cap screws (L). (See Figure 2)

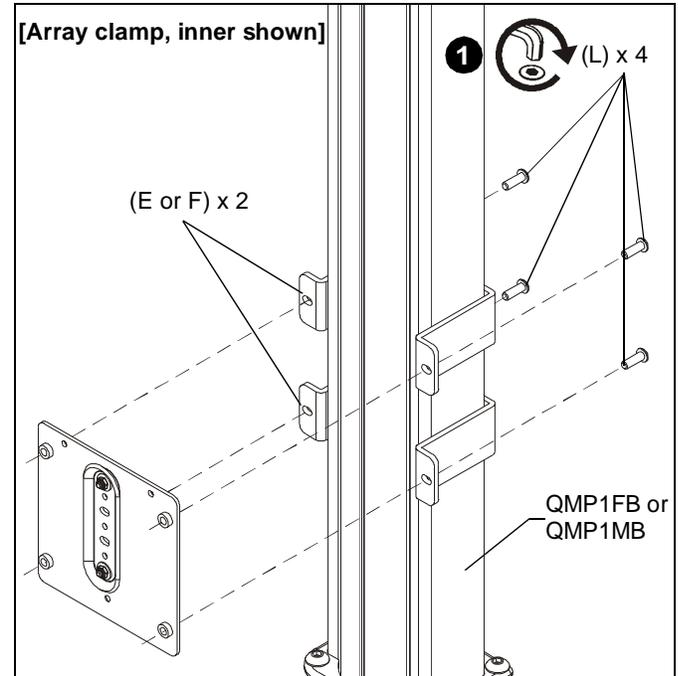


Figure 2

5. Insert top of height-adjust assembly (C) over lip on top of attachment plate assembly. (See Figure 3)

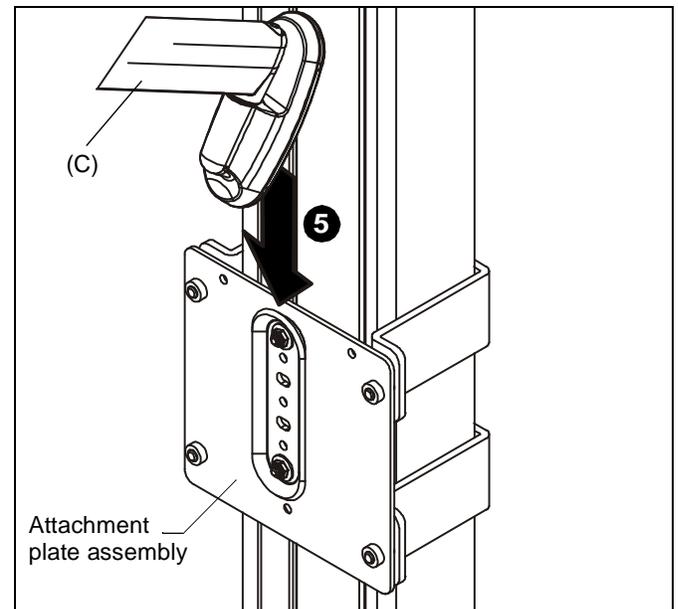


Figure 3

- Swing height-adjust assembly (C) down flush against attachment plate assembly. (See Figure 4)

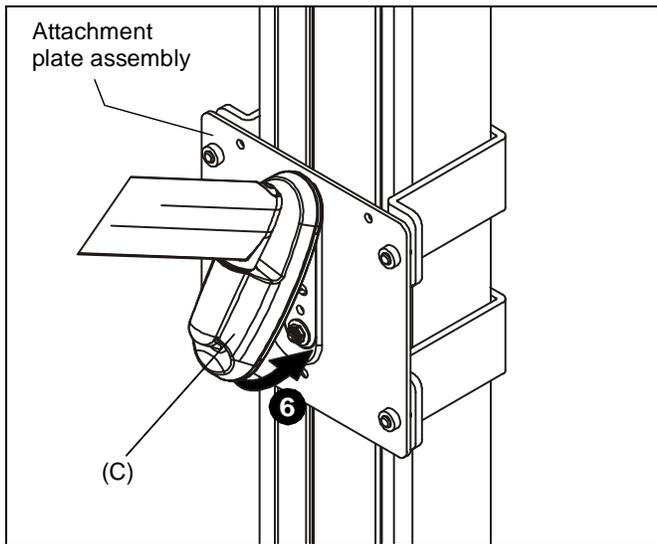


Figure 4

- Tighten set screw using 5/32" hex key (R). (See Figure 5)



CAUTION: IMPROPER INSTALLATION CAN LEAD TO ACCESSORY FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! Make sure set screw engages back side of bracket on attachment plate. (See Figure 5)

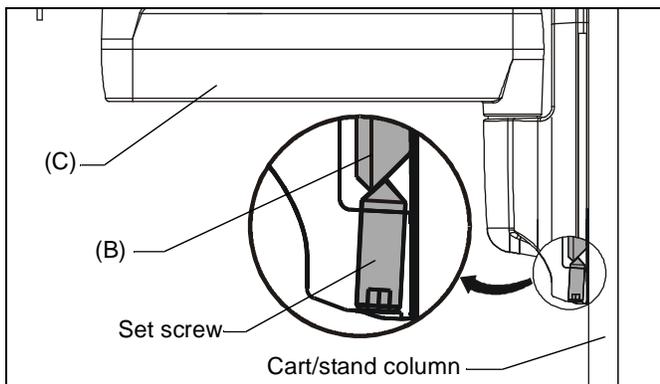


Figure 5

Assembling Laptop Tray Assembly to Cart/Stand

- Attach laptop tray assembly (D) to height adjust assembly (C) using one 5/16-18 x 3-1/2" button head cap screw (M), two .018" spacers (W), one UHMW washer (U), one pivot pin (H), one UHMW washer (T), and one 5/16" nylon lock nut (V). (See Figure 6)

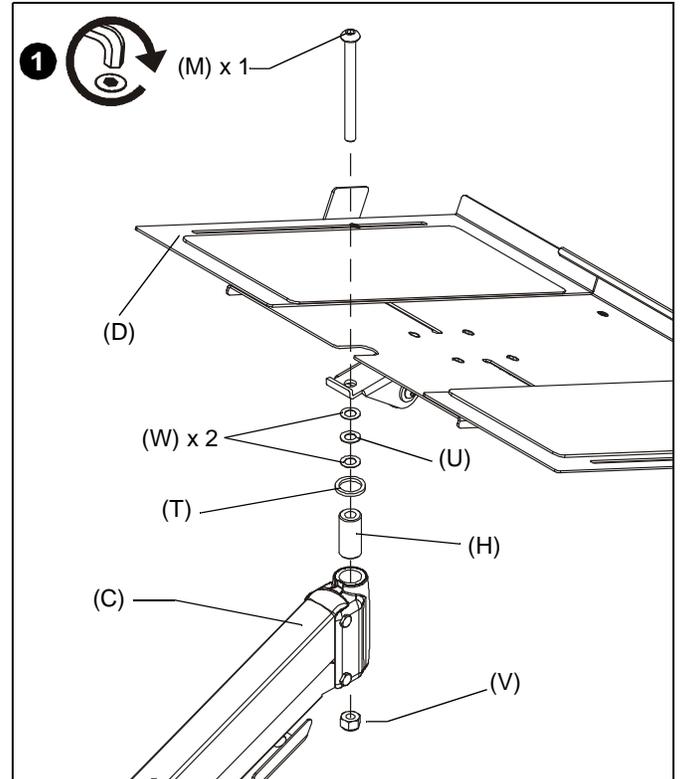


Figure 6

Cable Management

- Thread laptop cable through slot along the back edge of laptop tray and down along the side of the height-adjust arm to the cable management bracket. (See Figure 7)

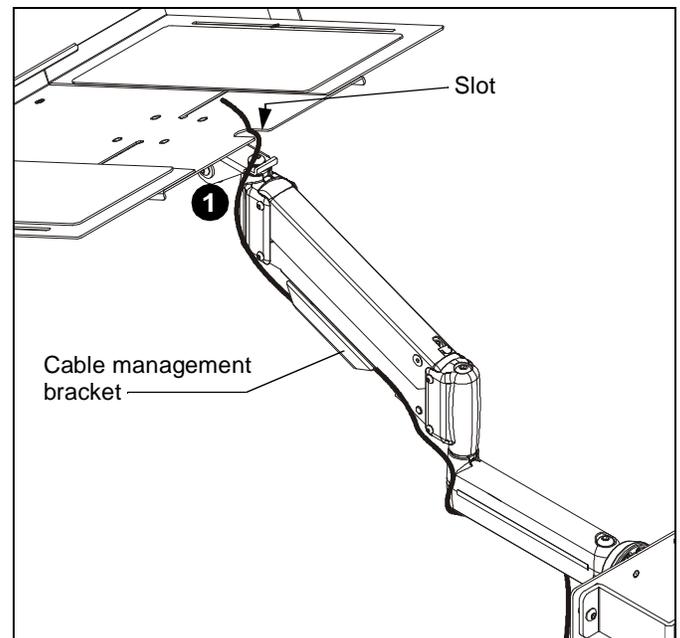


Figure 7

- Open the cable management bracket on the height-adjust arm by sliding bracket towards the edge of the arm. (See Figure 8)

NOTE: If necessary, cable management bracket attach screws may be loosened using hex key (S).

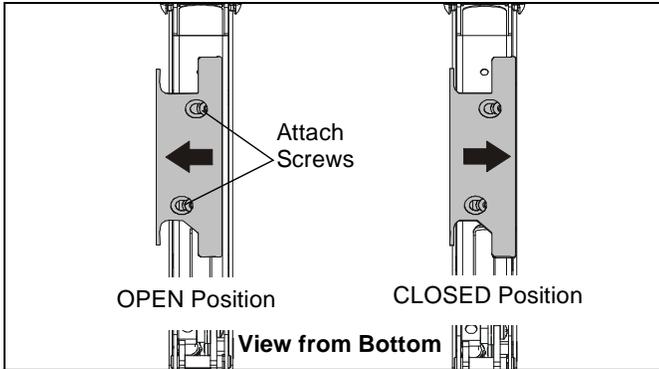


Figure 8



CAUTION: Ensure that adequate cable slack exists for movement of laptop, and that cables will not be pinched when bracket is closed.

- Carefully insert cables into bracket. (See Figure 9)

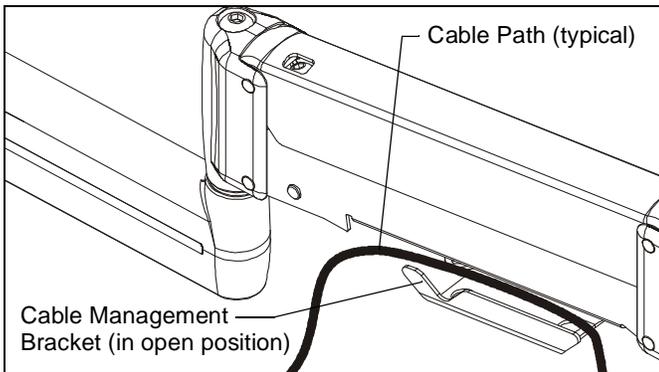


Figure 9

- Close cable management bracket by sliding it back towards the centerline of the arm. (See Figure 8)

NOTE: If necessary, cable management bracket attach screws may be tightened using hex key (S).

- Carefully insert cables in cavity located in lower portion of non-height adjustable arm. (See Figure 10)
- Install cable management cover (G) with two #8-32 x 3/8" Phillips flat head screws (P). (See Figure 10)

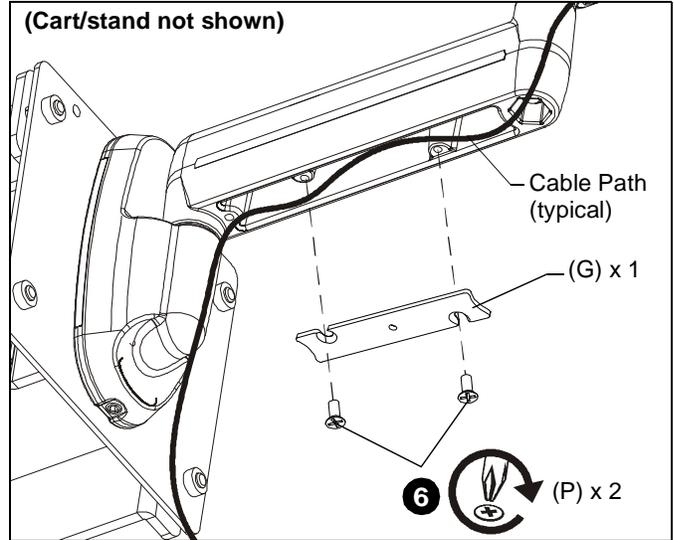


Figure 10

ADJUSTMENTS

Swing Arm Pivot/Swing

- Using 3/16" hex key (S), slightly loosen or tighten the adjustment screw(s) as necessary. (See Figure 11)

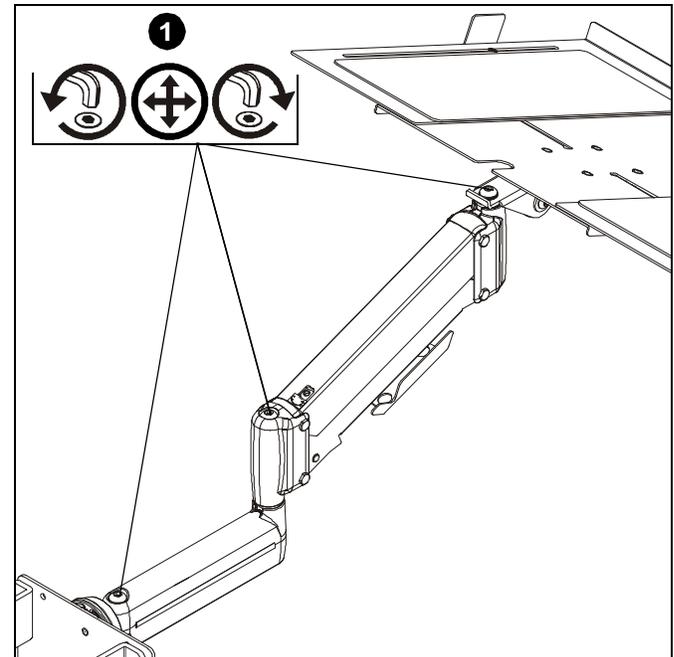


Figure 11

Height Adjustable

1. Using 5/32" hex key (R), slightly loosen or tighten the adjustment screw as necessary. (See Figure 12)
 - If display settles on its own, rotate adjustment screw counterclockwise (towards the "+" symbol).
 - If display rises on its own, rotate adjustment screw clockwise (towards the "-" symbol).

NOTE: It may be necessary to raise or lower the height adjustable arm to expose the adjustment screw.

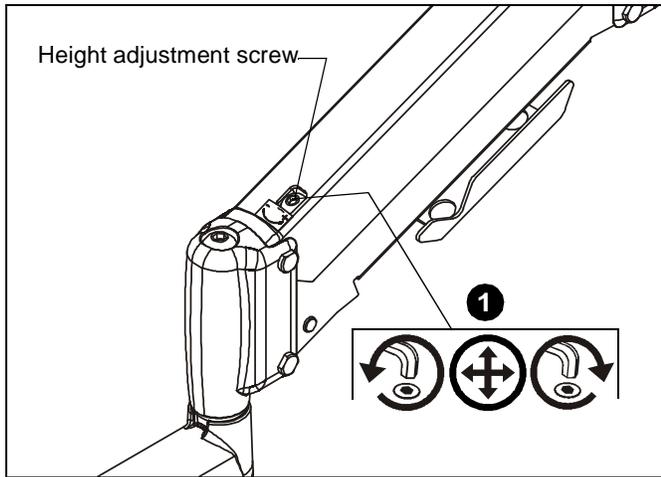


Figure 12

Laptop Tray Tension Adjustment

1. Using 3/16" hex key (S), slightly loosen or tighten the laptop tray tension adjustment screw as necessary. (See Figure 13)

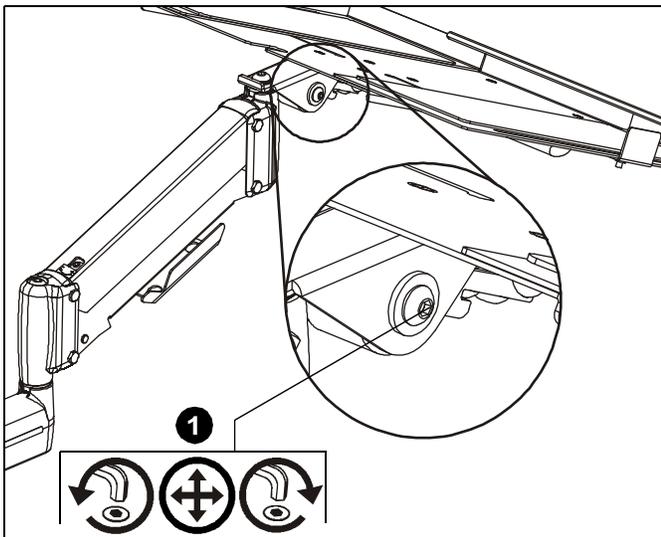


Figure 13



Chief Manufacturing, a products division
of Milestone AV Technologies

8832-002048 Rev00
©2011 Milestone AV Technologies, a
Duchossois Group Company
www.chiefmfg.com
01/11

USA/International	A 8401 Eagle Creek Parkway, Savage, MN 55378 P 800.582.6480 / 952.894.6280 F 877.894.6918 / 952.894.6918
Europe	A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands P +31 (0)40 2668620 F +31 (0)40 2668615
Asia Pacific	A Office No. 1 on 12/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong P 852 2145 4099 F 852 2145 4477

