




Installation & Assembly: Suspended Ceiling Kit

Model: CMJ450



Max UL Load Capacity: 250 lb (113 kg)

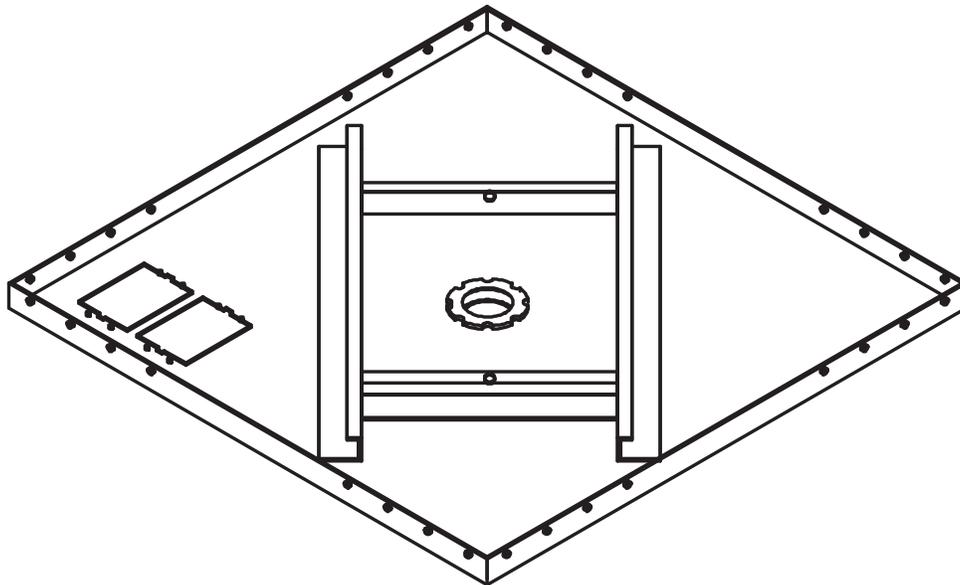

Compatible model/series*	AEC* EXT* ADD*
--------------------------	----------------------

NOTE: Read entire instruction sheet before you start installation and assembly.

▲ WARNING

- Before installing make sure the supporting surface will support the combined load of the equipment and hardware.
- Screws must be tightly secured. Do not overtighten screws or damage can occur and product may fail.
- Never exceed the Maximum UL Load Capacity. See page one.
- Always use an assistant or mechanical lifting equipment to safely lift and position equipment.
- This product is intended for indoor use only. Use of this product outdoors could lead to product failure and personal injury.
- Be careful not to pinch fingers when operating the mount.
- For support please call customer care at 1-800-865-2112.
- To properly tighten screws: Tighten until screw head makes contact, then tighten another half turn. Do not overtighten screws.

Tools Needed for Assembly



- phillips screwdriver
- drill
- 1/4" (6 mm) bit for concrete
- 5/32" (4 mm) bit for wood joist or beams
- level

Table of Contents

Parts List.....	3
Flush Mount Tube or Extension Column Installation	3
Installation to Solid Concrete or Wood Joists	5


Before you begin, make sure all parts shown are included with your product.
Parts may appear slightly different than illustrated.

Parts List		
Description	Qty.	Part #
A ceiling tray	1	1455-476W
B M6 x 10 mm long phillips screw	8	520-9401
C M6 x 20 mm long phillips screw	4	520-9402
D hanger bracket	4	1452-278
E hanger bracket clamp	4	1452-279
F turnbuckle	4	560-9620
G 20' (6.1m) tie wire (not shown)	1	1450-522
H safety cable (not shown)	1	1450-517
I safety cable clamp	2	1450-518
J eye bolt	5	580-0006
K concrete anchor	5	580-0005
L M5 x 10 mm penta pin screw	1	505-9010
M M5 x 1" penta pin driver	1	520-9249

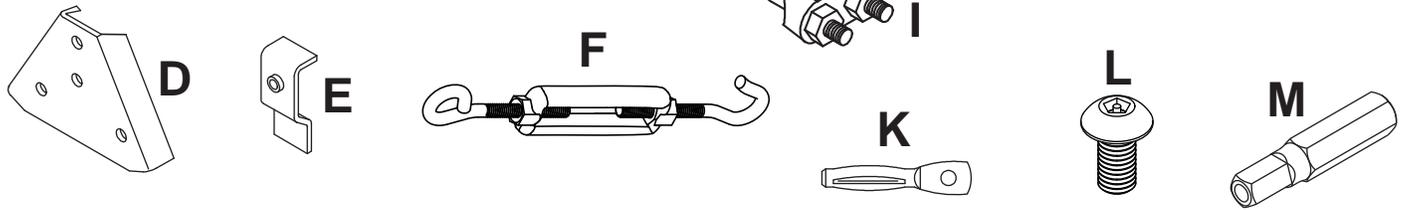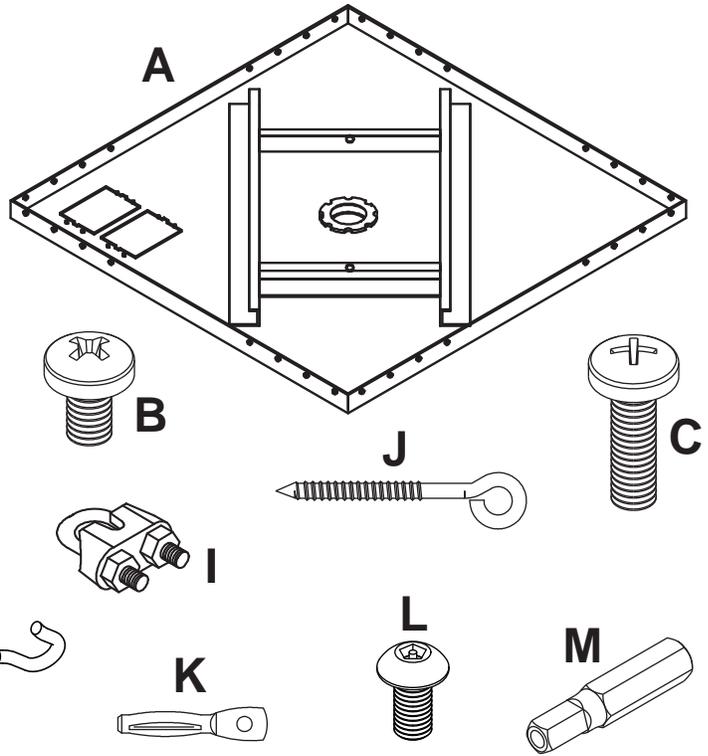


IMPORTANT PRE-ASSEMBLY INFORMATION:
Ceiling Tray (A) is designed to fit within a 24" (610 mm) x 24" (610 mm) section of a conventional suspended ceiling system. Ceiling runners (see **DETAIL 1, page 5**) should have a "T" cross section and a minimum height of 1.5" (38 mm). In cases where 24" (610 mm) x 48" (1219 mm) ceiling tiles are used, cut one tile in half and add another 24" (610 mm) ceiling runner in order to make a 24" (610 mm) x 24" (610 mm) section.
For certain installations it may be best to install ceiling anchors (step 4) before installing the ceiling tray (step 3).


1 For FLUSH MOUNT TUBE Installation: From the top, thread the Flush Mount Tube (not included) through center of ceiling tray (A).
Skip to step 3.

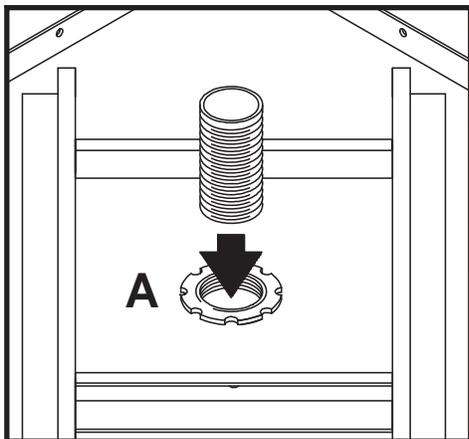


2 For EXTENSION COLUMN Installation: From the bottom up, thread extension column (not included) up through retaining collar in adjustable collar mount plate. Align notch in extension column with hole in collar and fasten using M5 x 10 mm penta pin screw (L) with M5 penta pin driver (M) as shown below.

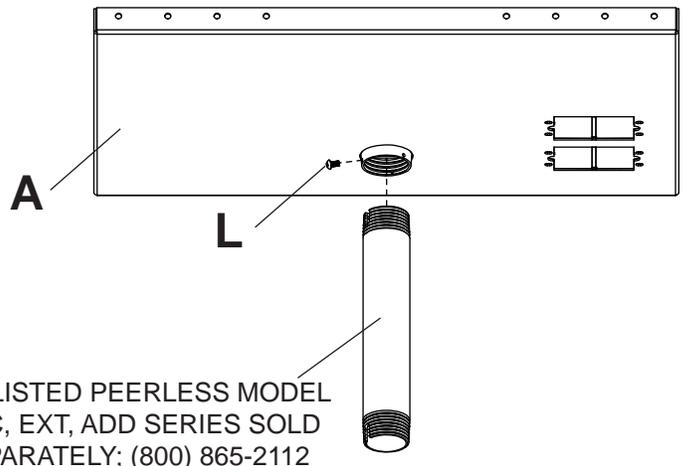

- 3 Attach four Hanger Brackets (D) to four corners of Ceiling Tray (A) using 10 mm long phillips screws (B). Place Ceiling Tray (A) into 24" (610mm) x 24" (610mm) opening in ceiling (in place of a ceiling tile). Clamp Ceiling Tray (A) to Ceiling Runners using Hanger Bracket Clamps (E) and 20 mm long phillips screws (C). Hook Turnbuckles (F) into Hanger Brackets (D).

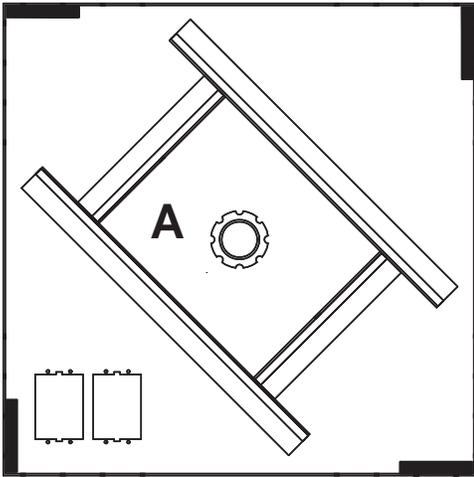

TOP VIEW - CEILING TRAY
Black rectangles show correct positions for Hanger brackets.

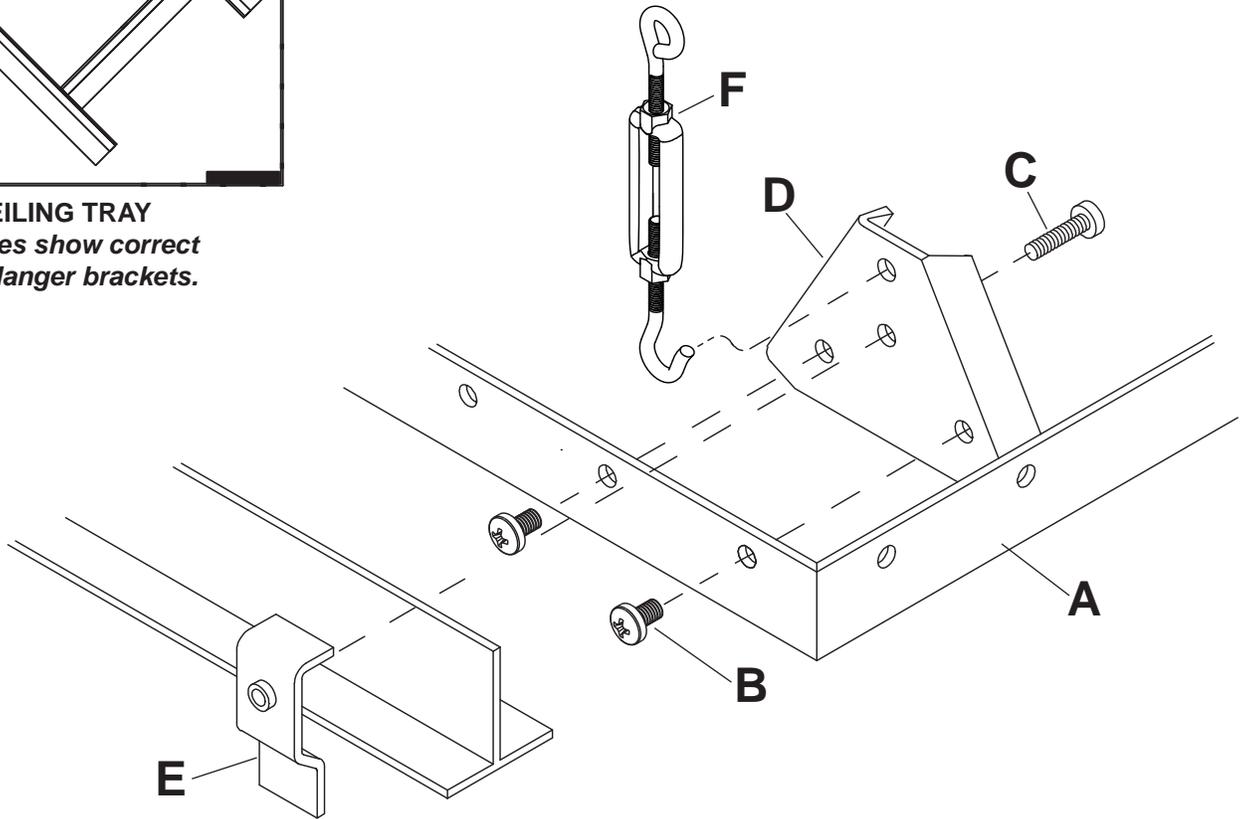


- 4 Cut tie wire (G) into four pieces of equal length. Insert wires through ends of turnbuckles. Twist each wire around itself at least four times. Drill holes for four ceiling anchors (see "Various Anchoring Methods"). Position the holes so that when the tie wires (G) when attached and taut will angle out at 15°. Drill a fifth anchor hole directly above the center of the ceiling tray. Pull tie wires tight and attach to ends of ceiling anchors (or truss). Again twist each wire around itself at least four times. When this step is complete, the weight of the ceiling tray should be supported by the tie wires. **Note:** 20' (6.1 m) of tie wire (G) is provided. If space between the true ceiling and suspended ceiling is more than 36" (914 mm), additional wire (12 gauge annealed, steel, black) will be needed.

VARIOUS ANCHORING METHODS Max. UL Load Capacity : 250 lbs. (113 kg)



Wood Joists or Beams

Use stud finder to locate and mark stud center lines. Drill 5/32" (4 mm) dia. holes 2" (51 mm) deep. Fully insert eye bolts (J). Mounting hole must center on stud.

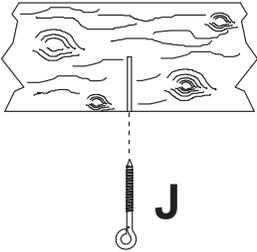

Solid Concrete

Drill 1/4" (6 mm) dia. holes 1.5" (38 mm) deep. Hammer in Concrete Anchor (K) using Rawl #3250 setting tool or equivalent.

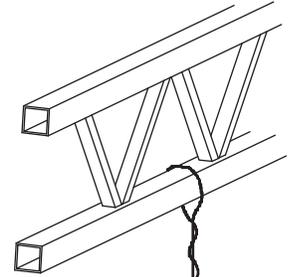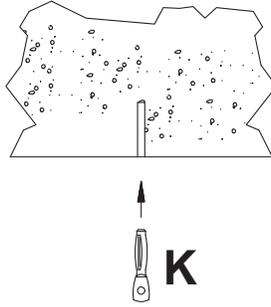

Truss Ceiling

No anchor required. After attaching tie wire to turnbuckle loop upper end around ceiling truss. Pull tie wire tight and twist it around itself at least four times.

▲ WARNING


- When installing Peerless ceiling mounts on wood joist/beam covered with gypsum board (drywall), verify that the joists or beams are a minimum of 2" x 4" nominal size. Do not install over gypsum board thicker than 5/8".

▲ WARNING

- When installing Peerless ceiling mounts on a concrete ceiling, the ceiling must be at least 8" thick with a minimum compressive strength of 2000 psi. Never attach expansion anchors to concrete covered with plaster, drywall or other finishing material.

▲ WARNING

- Installer must verify that the ceiling will safely support four times the combined weight of all attached equipment and hardware.

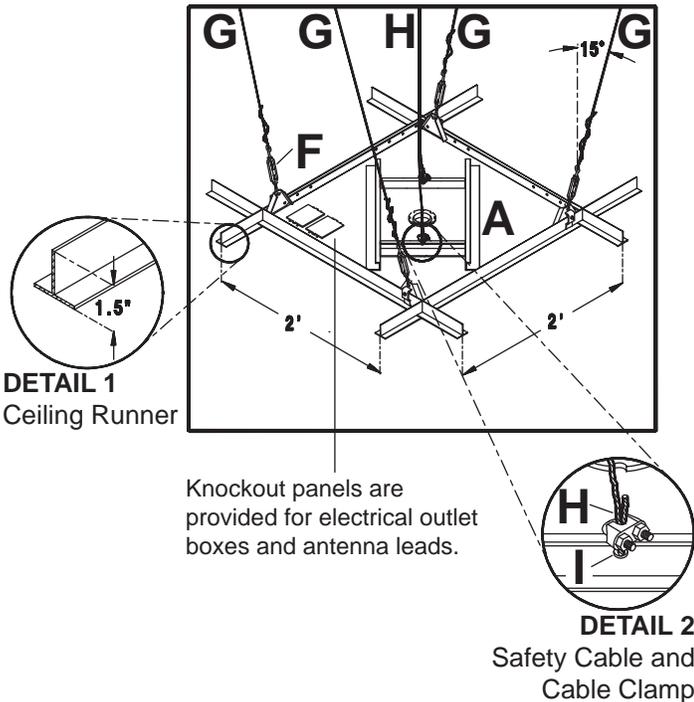

DETAIL 1
Ceiling Runner

Knockout panels are provided for electrical outlet boxes and antenna leads.

DETAIL 2
Safety Cable and Cable Clamp

- 5 Run the safety cable (H) through the remaining ceiling anchors. Pass each end through holes in ceiling plate reinforcements and join with cable clamp (I). **DO NOT TIGHTEN YET!**
- Suspended Ceiling Kit installation is now complete. After all components (Mount, Extension Column, etc.) and equipment (monitor, VCR, etc.) have been attached, tension the tie wires by adjusting turnbuckles (F). **Load must be carried by tie wires - not suspended ceiling runners.** Finally, take up the slack in safety cable (H) leaving it slightly loose. Tighten both safety cable clamps (I).

LIMITED FIVE-YEAR WARRANTY

Peerless Industries, Inc. ("Peerless") warrants to original end-users of Peerless® products will be free from defects in material and workmanship, under normal use, for a period of five years from the date of purchase by the original end-user (but in no case longer than six years after the date of the product's manufacture). At its option, Peerless will repair or replace, or refund the purchase price of, any product which fails to conform with this warranty.

In no event shall the duration of any implied warranty of merchantability or fitness for a particular purpose be longer than the period of the applicable express warranty set forth above. Some states do not allow limitations on how long a implied warranty lasts, so the above limitation may not apply to you.

This warranty does not cover damage caused by (a) service or repairs by the customer or a person who is not authorized for such service or repairs by Peerless, (b) the failure to utilize proper packing when returning the product, (c) incorrect installation or the failure to follow Peerless' instructions or warnings when installing, using or storing the product, or (d) misuse or accident, in transit or otherwise, including in cases of third party actions and force majeure.

In no event shall Peerless be liable for incidental or consequential damages or damages arising from the theft of any product, whether or not secured by a security device which may be included with the Peerless® product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty is in lieu of all other warranties, expressed or implied, and is the sole remedy with respect to product defects. No dealer, distributor, installer or other person is authorized to modify or extend this Limited Warranty or impose any obligation on Peerless in connection with the sale of any Peerless® product.

This warranty gives specific legal rights, and you may also have other rights which vary from state to state.

peerless-AV®

www.peerless-av.com

© 2008 Peerless Industries, Inc.