



INSTALLATION INSTRUCTIONS

# FSA-1000

## SMALL FLAT PANEL DISPLAY MOUNT SECURITY

Prior to assembly, unpack carton completely and verify contents.  
If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

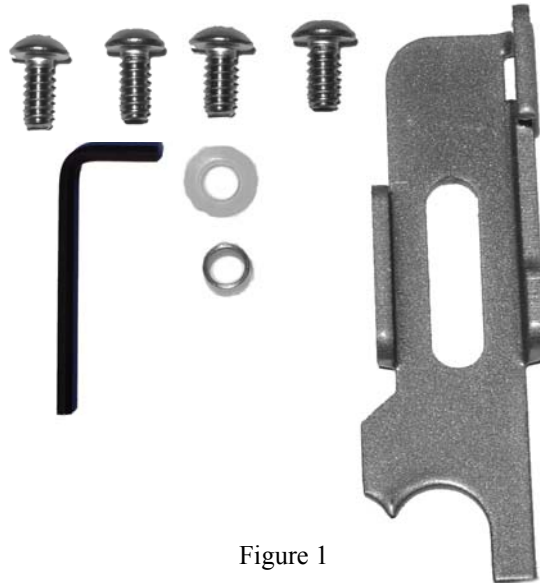


Figure 1

- (1) Security Bracket
- (4) 10-24 X .375 Button Head Security Screw

- (1) Nylon Washer, #10
- (1) 1/4" X 1/8" Spacer
- (1) 5/32" Security Hex Key

### **BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY**

1. Place security bracket on latching flag as shown in Figure 2.



Figure 2

2. Place spacer and Nylon washer on one 10-24 x .375 button head security screw.
3. Secure bracket on latching flag using screw, washer and spacer assembled in step 2 and second 10-24 x .375 button head security screw as shown in Figure 3.
4. For pitch adjustable brackets, replace two tilt adjustment screws on one side of bracket with two 10-24 x .375 button head security screw (see Figure 4).

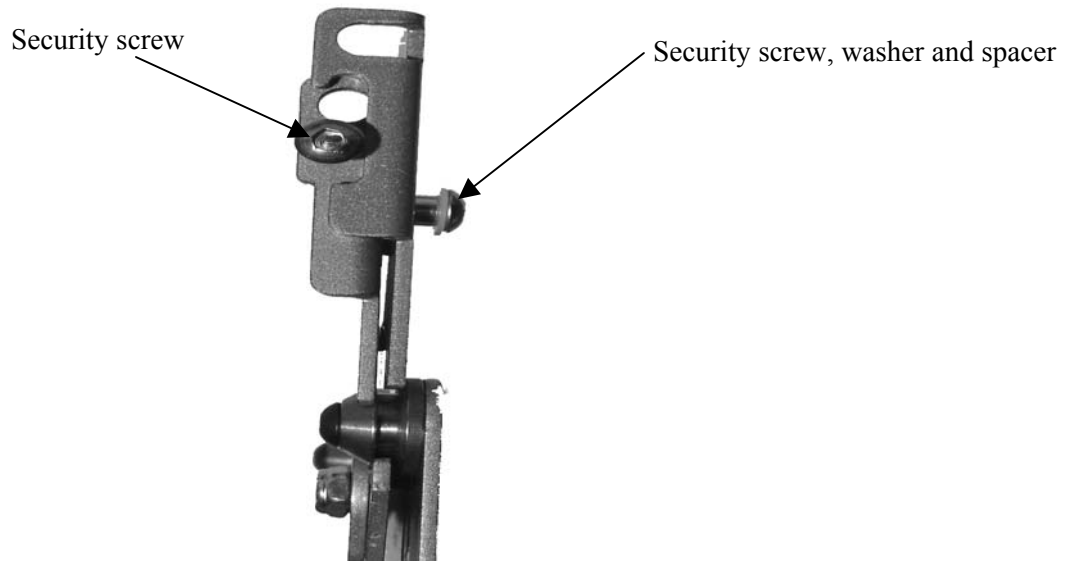


Figure 3

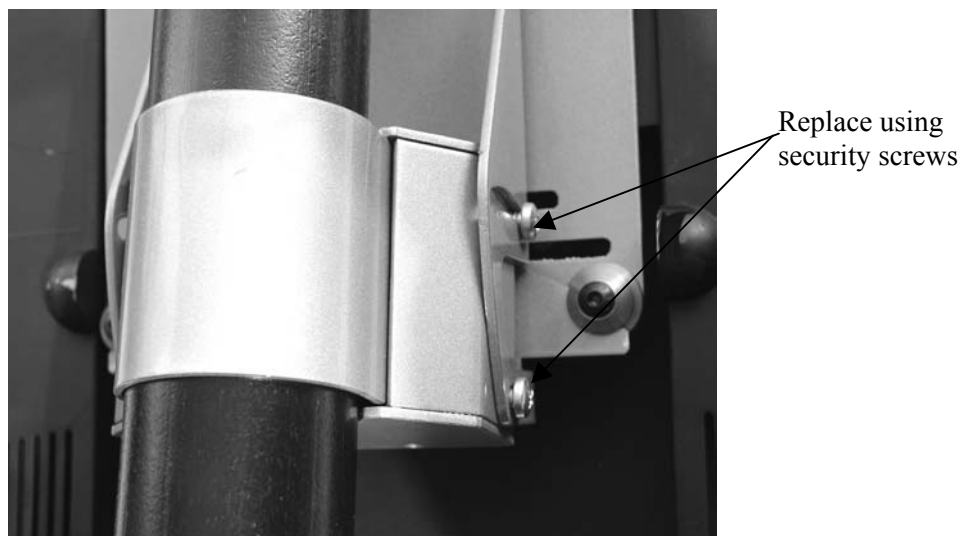


Figure 4