



**Goldtouch**

**KB-FLD23-BT**  
**USER MANUAL**

Peapod Mini Keyboard

## CONGRATULATIONS ON YOUR PURCHASE

Please read this user manual before using the unit and keep this manual in a safe place for future reference.

### Copyright

© 2026 Key Ovation, LLC. All rights reserved.

### Trademarks

Goldtouch, the Goldtouch logo and Productivity through Prevention® are registered trademarks of Key Ovation, LLC. All other trademarks are copyright of their respective owners. All rights reserved.


### Installation

1. Choose your preferred connection type: Bluetooth IOS, Android, or Windows.
2. Follow the appropriate pairing instructions on the “Pair the Keyboard to Device” section.

\*Please note that selecting the connection type utilizes the FN key.



# FEATURES DESCRIPTION

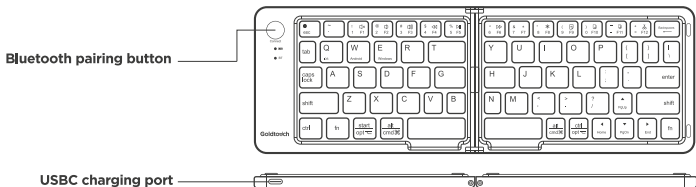

## Bluetooth Keyboard Status indicators and other related descriptions



**Power on indicator:** When the keyboard is opened, the Hall switch will power on the keyboard. The Red light will go on for 2/s then off. The Blue Light flashing for 1/s indicates Pairing Mode and to enter the pairing code, slow flashing back to sleep mode. Keyboard turns off when the keyboard is folded.

**Charging indicator:** T / C charging. The Power Indicator Red light is always on while charging. Once Fully Charged, the light goes off.

**Low battery indicator:** When the battery voltage is lower than 3.3V, the red light will start flashing at a 0.5 second interval, flash 10 times and then go into sleep mode. The keyboard will awaken with any button action and the LED light will again repeat flashing.

**Charging instructions:** When plugged into the charging port of the keyboard with the USB-C cable, the red light is On. After charging for about 2 hours, the red light goes out when charging is complete.



**Pairing Mode:** Press the Bluetooth Pairing key, BT blue light flashes for 1/Sec intervals. After successful code input, the blue LED is solid for 2 seconds and then off. The maximum pairing code time is 2 minutes, if time exceeds 2 minutes without pairing, the keyboard enters into sleep hibernation state.

**Re-Connect indicator:** After successfully pairing the keyboard and if it is shutdown, turn on the keyboard by opening. The red light is on for 2/s then off, the blue light flashes to indicate connect mode, the keyboard automatically connects to host, once re-connected the blue light goes off. Reconnection time should not exceed more than 5sec. If re-connect unsuccessful after 30sec, the keyboard enters Hibernation/Sleep Mode.

**Caps indicator:** BT Indicator is Blue when CapsLock = On, BT Indicator light is off when CapsLock = Off. Blue light will always go off after one minute of inactivity when CapsLock = On to conserve battery power. If CapsLock mode is engaged, the Blue light will come back on if any key is pressed and the keyboard is awakened.

**Keyboard enters Sleep/Hibernation state:** Keyboard powers off after 30 minutes without pairing keyboard — keyboard enters sleep/hibernation state. Normal use of the keyboard after pairing to host, the keyboard will enter sleep/hibernation after 10 minutes of no operation. Press any key to wake up the keyboard immediately.

## Specifications

### Product Information:

- Keyboard size: 11.1\*3.72\*0.34in
- Keyboard number: 67keys
- Bluetooth version: Bluetooth 5.1
- Connection distance: 10m
- Li-ion battery capacity: 150mAh
- Sustainable working time: About 56 hours
- Dormancy time: 10minutes
- Wake-up method: Any key

### Support System:












- Windows/iOS/Android
- System Switching:
  - ├ Windows: FN+E
  - ├ iOS: FN+Q
  - └ Android: FN+W

Key Combination	iOs	Android	FN+Shift combination on Windows	Windows
FN + Q	IOS Select			
FN + W		Android Select		
FN + E				Windows Select
FN + Esc	Home	Home	WEB/HOME	Esc
FN + F1	Mute	Mute	Mute	F1
FN + F2	Volume -	Volume -	Volume -	F2
FN + F3	Volume +	Volume +	Volume +	F3
FN + F4	Previous song	Previous song	Previous song	F4
FN + F5	Play/pause	Play/pause	Play/pause	F5
FN + F6	Next song	Next song	Next song	F6
FN + F7	Brightness -	Brightness -	Brightness -	F7
FN + F8	Brightness +	Brightness +	Brightness +	F8
FN + F9	Select All WIN+A	Select All WIN+A	Select All WIN+A	F9
FN + F10	Copy WIN+C	Copy WIN+C	Copy WIN+C	F10
FN + F11	Paste WIN+V	Paste WIN+V	Paste WIN+V	F11
FN + F12	Cut WIN+X	Cut WIN+X	Cut WIN+X	F12
FN + UP	PGUP PageUp	PGUP PageUp	No function	PGUP PageUp
FN + DOWN	PGDN PageDown	PGDN PageDown	No function	PGDN PageDown
FN + LEFT	HOME Page Top	HOME Page Top	No function	HOME Page Top
FN + RIGHT	END Page End	END Page End	No function	END Page End

## Keyboard shortcut function key description

1. This keyboard has a three-in-one system keyboard, for the establishment of Bluetooth connections, You must press FN + the corresponding system key (IOS, Android, Windows) to switch to the required operating system, otherwise the Bluetooth keyboard function below will be invalid;
2. Simultaneously press FN + the key that corresponds to its icon to get the function of this icon.

IOS, Android, Windows →

	Home		Paste		Play/Pause
	Search		Cut		Volume-
	Select All		Previous Song		Volume+
	Copy		Next Song	FN+Pgup	Move the cursor to the top
FN+Home	Move the cursor to the front	FN+PgDn	Move the cursor to the bottom	FN+End	Move the cursor to the end

# HOW TO PAIR (STEP-BY-STEP)

## How to connect Bluetooth keyboard with iOS system

1. Unlock your iPad/iPhone, enter the "Settings" interface, find the "Bluetooth" option and click to enter.
2. If Bluetooth is not enabled, Slide the right icon of Bluetooth switch to On, iOS device will enter the search pairing status;
3. Open the keyboard, or press the Bluetooth pairing key to enter the pairing mode.
4. The iOS device interface will show the device name of "Bluetooth keyboard", tap on this device name to connect;
5. My device list "Bluetooth keyboard" will show connected next to the device. and the keyboard status light will be off.

## Bluetooth keyboard and Android system connection steps

1. Unlock your Android tablet or phone, find the settings and click the icon to enter "Settings" then select Connections Interface, find "Bluetooth" option and click to enter. Ensure Bluetooth is enabled on your Android device.
2. If Bluetooth is not enabled, Slide the right icon of Bluetooth switch to On, the device enters the search pairing state;
3. Open the keyboard, or press the Bluetooth pairing key to enter the pairing mode.
4. iOS device interface will show the device name of "Bluetooth keyboard", click this device name to connect;
5. My device list will show "Bluetooth keyboard" device next to the connected device, and the keyboard status indicator will be off.

## Bluetooth keyboard and Windows PC or Tablet connection steps

1. Unlock the PC or Tablet and enter the "Start" interface;
2. On Tablet - Touch the black edge of the screen and slide from right to left, click the "Settings" icon.
3. On PC - On the Start Menu select Settings.
4. On the Settings interface, Select Devices, then select Add Bluetooth or other device, the PC or Tablet will enter into the search pairing state;
5. Open the keyboard, or press the Bluetooth pairing key to enter the pairing mode.
6. The PC or Tablet interface will show the device name of "Bluetooth keyboard", click this device name to connect;
7. The device name of "Bluetooth keyboard" will be shown next to "Bluetooth keyboard" in my device list, and the keyboard status indicator will be off.



## NOTE

- Technical specifications given in this table are supplemental information and cannot give occasion to claims.
- Technical specifications are subject to change without notice due to improvement of **Goldtouch** production.
- Technical support by **Goldtouch Support**.



## GENERAL

- This product conforms to the US and EU requirements.
- This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
  1. This device may not cause harmful interference.
  2. This device must accept interference received, including interference that may cause undesired operation.
- The product is made in accordance with RoHS standards. The product is made in accordance with CE standards. The standards were issued in order to decrease the amount of electronic and electrical waste emitted into the atmosphere.
- The WEEE symbol (the crossed-out wheeled bin) indicates that this product is not home waste. Please protect the environment by recycling appropriately. In order to get detailed information about recycling this product, please contact your retailer or local authority.

## CERTIFICATIONS



# WARRANTY

There is a one year manufacturer's warranty from date of original purchase date. Customer must submit an RMA form and obtain an RMA number before shipping product back. If product tests non-defective, is damaged, or submitted due to human error then customer is responsible for all shipping costs for return to Goldtouch and back.

After 30 days, customer is responsible for shipping costs to have items sent back for testing.

If defective, Goldtouch will return, at our cost, a replacement factory refurbished product. Warranty for the replacement item continues from the original date of purchase.

**The one year warranty does not cover Abuse or Normal wear.**

**Register your product online:**

***<https://www.goldtouch.com/support/warranty-registration/>***

**Important:** Be sure to retain your proof of purchase and for non-European purchasers we recommend registering your Goldtouch Keyboard as it may be required for warranty service.

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronically or mechanical, for the purpose, without the express written permission of Key Ovation, LLC. All trademarks are the property of their respective owners.

© Key Ovation LLC; All Rights Reserved.



**Goldtouch**

**TECHNICAL SUPPORT**  
**HAVING TECHNICAL PROBLEMS**  
**WITH THIS PRODUCT?**

Send an email to [support@goldtouch.com](mailto:support@goldtouch.com)  
for more information, please visit  
**[www.goldtouch.com](http://www.goldtouch.com)**