


Installation and Assembly - Adapter Bracket for VESA® 200 x 100 Screens

Models:
PLP V2X1,
PLP V2X1-S

Parts List

Description	Qty.	Part #
AA adapter bracket- top plate	1	200-4289
BB adapter bracket- bottom plate	1	200-4340
CC M6 x 10 mm socket pin screw	4	520-2066
DD M4 x 16 mm socket pin serrated washer head screw	6	510-2087
EE .5 OD x .44 ID x .19 bushing	6	590-1116
FF 4 mm security allen wrench	1	560-9646

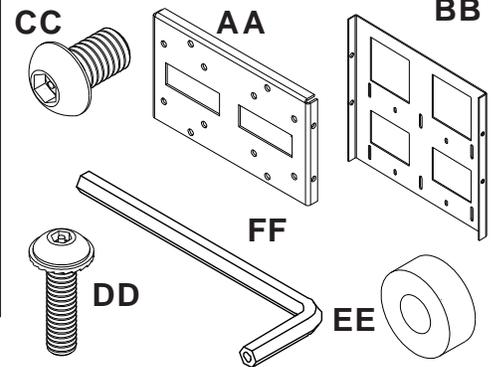


Note: Actual parts may appear slightly different than illustrated.


IMPORTANT! Read entire instruction sheet before you start installation and assembly.

1

FOR VESA 100 MOUNTING PATTERN - Sharp LC30HV2U
Use four M4 screws (DD) and four bushings (EE) to attach bottom plate (BB) to monitor using security allen wrench (FF). Use four center holes of plate as shown below.

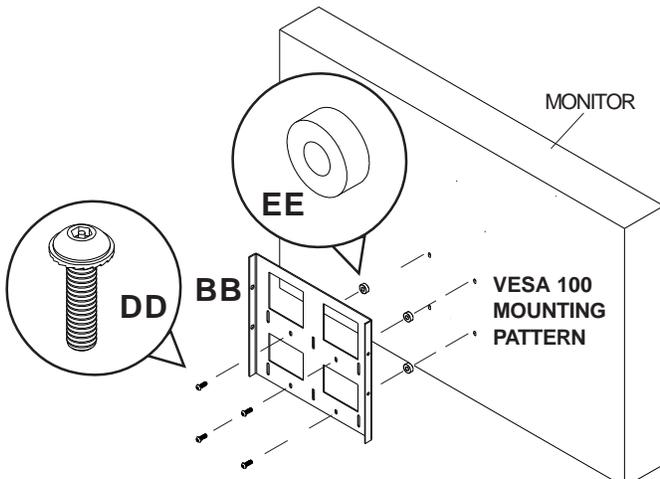

FOR VESA 100 X 200 MOUNTING PATTERN - NEC LCD3000-BK
Use six M4 screws (DD) and six bushings (EE) to attach bottom plate (BB) to monitor using security allen wrench (FF). Use six slots on plate as shown below. Align upper end of slots with screen mounting holes.

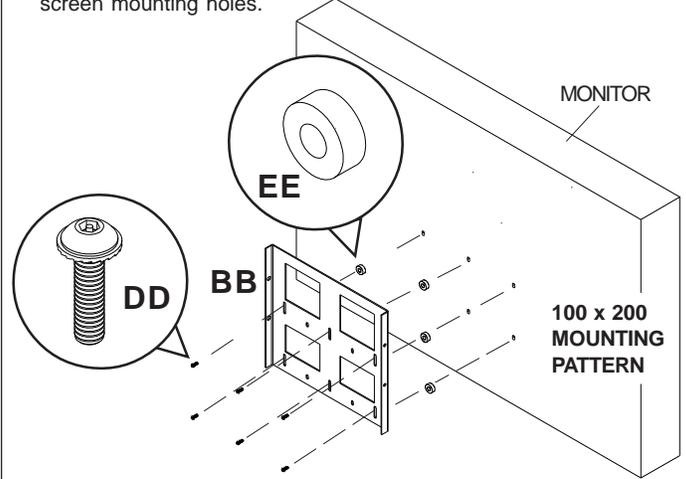

2

Use four M6 screws (CC) to attach top plate (AA) to bottom plate (BB) using security allen wrench (FF).
NOTE: Top plate (AA) will have one set of threaded holes on one side and a set of non-threaded holes on the other side. Bottom plate will also have one set of threaded holes on one side and a set of non-threaded holes on the other side. All four M6 screws should pass through non-threaded holes first and into threaded holes.

