



Assembly & Installation Instructions: Ciglio2 Under-Cabinet Light - Fixture CIG2-UCL16-S; CIG2-UCL28-S; CIG2-UCL38-S

Parts Included

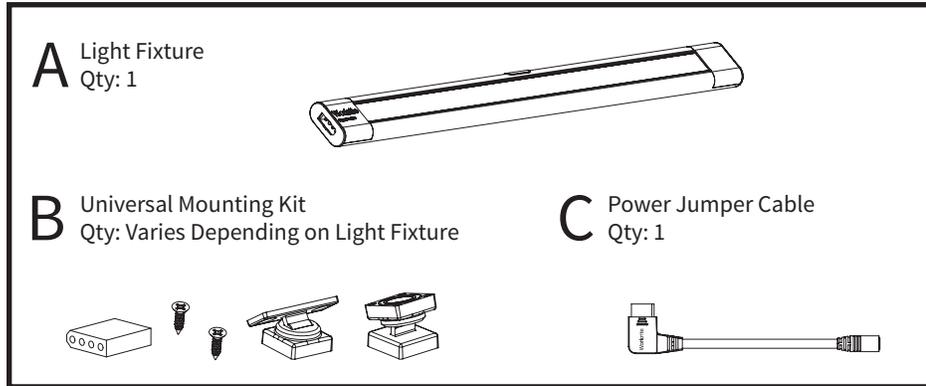

Parts (not included)

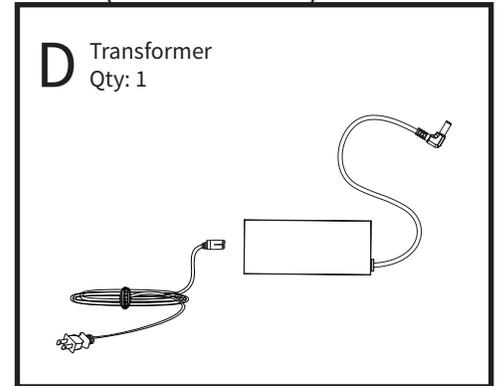


Tools Required

No tools are required for mounting to metal cabinets. A #2 Phillips head screwdriver is needed if installing to wood cabinets.




Note:
If installing parent unit of daisy chain, be sure to position Parent unit so that it can be connected to the Child unit with its supplied jumper cable.

PARENT

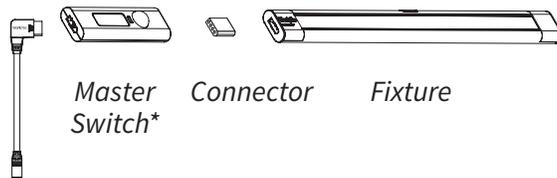

Power Jumper Cable

DAISY CHAIN

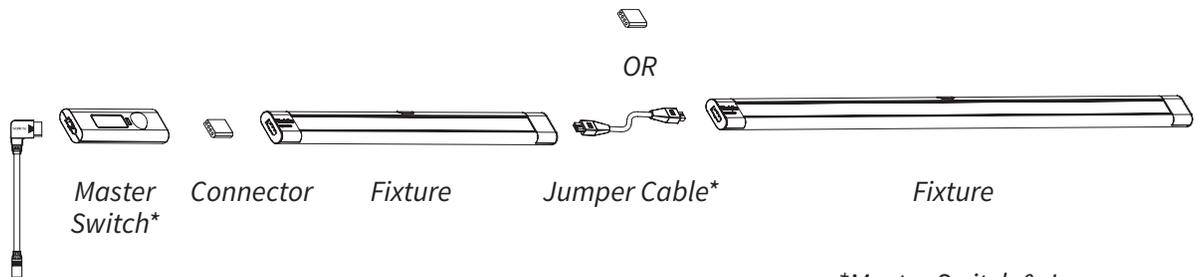

Power Jumper Cable


*Master Switch & Jumper Cable are not included

1 Determine if light will be used as a parent or a child (daisy chain)

Make sure to change the switch accordingly (switch the button to the left for parent mode; to the right for daisy chain mode)

If you will use the light as a **parent**, follow **steps 2-4**

If you are installing a **Daisy Chain**, follow **steps 2-7**

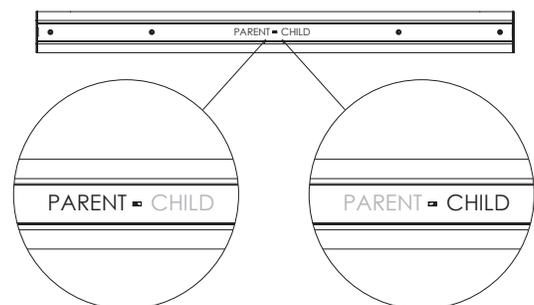

2 Mount to Cabinet

Determine if light will be affixed to a metal or wood cabinet and follow the appropriate step below


Mount to **Metal** cabinets:

- a** Place Magnetic Mounts (B) onto back of Light Fixture (A)
- b** Attach Light Fixture to metal under-cabinet. Magnets will hold the fixture in place.

OR Mount to **Wood** Cabinets:


Note: You will need a #2 Phillips-head screwdriver to complete this step.

- a** Determine where you want to mount your light and draw a straight line on the underside of the cabinet to indicate the center along the length of the light.
- b** Attach the Universal Mounts (B) along your line with Screws provided by inserting screw through magnet and then screwing into marked location.
- c** Attach Light Switch (A) onto mounts. Magnets will hold the fixture in place.

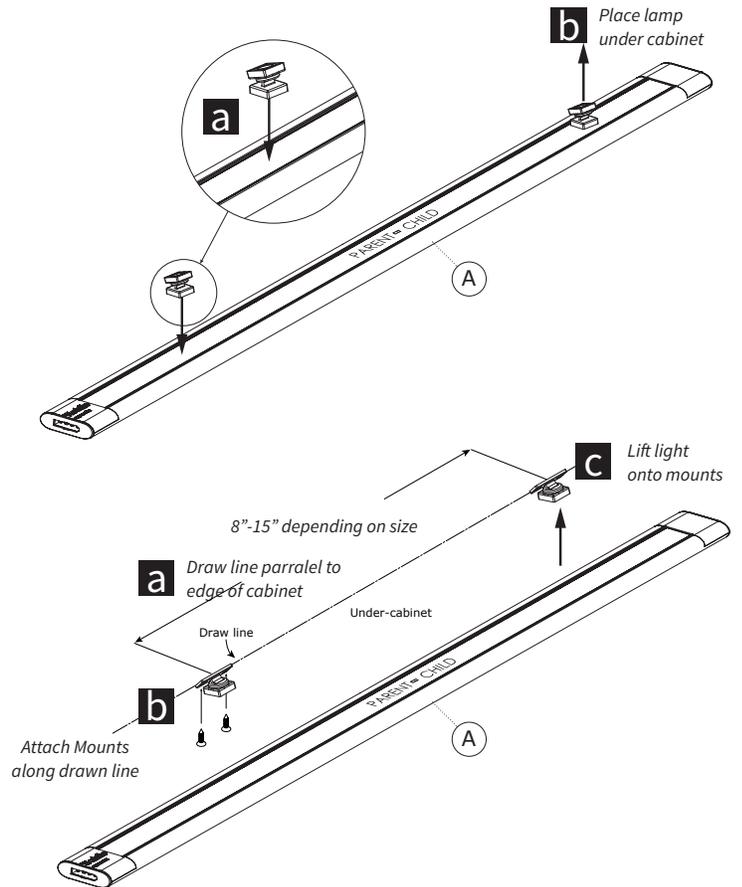


3 Attach Fixture to the Transformer

- a** Insert Power Jumper Cable (C) into Fixture (A)
- b** Connect Power Jumper Cable (C) to the Transformer (D).

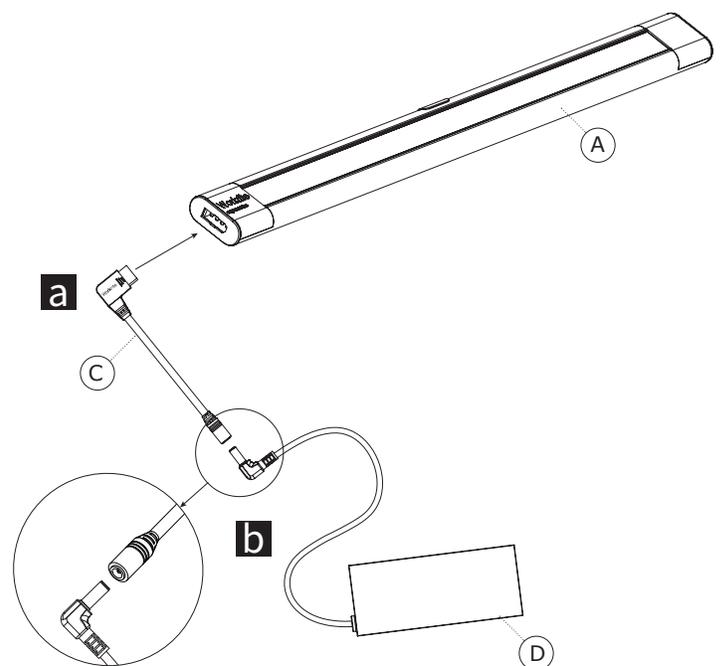


4 Plug Transformer (D) into Wall Outlet

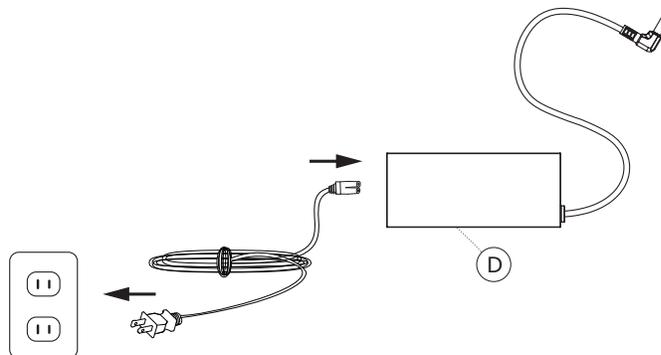

5 Installing a Daisy Chain

Follow step 3 & 4, then using a Connector or Jumper Cable (not included), secure between each of the light in the chain. The order of the lights does not matter as long as the parent unit is included in the chain.

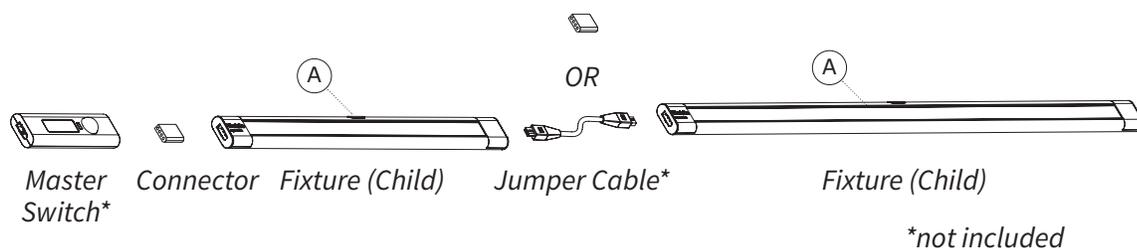


6 Confirm Parent Unit is Plugged in Then Turn On

Confirm Parent Unit is installed according to its instructions and turn on PARENT unit to turn on all daisy chained light.

Note: Daisy Chain system can be powered via Child or Parent units

7 Indicator Light

- a** To turn the power on/off, tap the indicator light once to turn it on and twice to turn it off.
- b** To adjust the brightness, touch your finger on the indicator light and stay for few seconds.

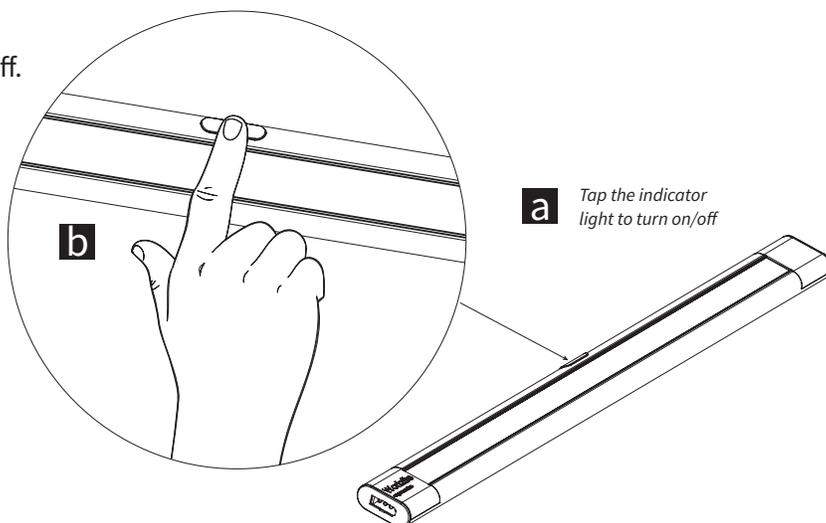

 Replacement parts

Universal Mounting Kit.....	CIG2-MT-IC
Power Adapter.....	CIG2-CABLE-PWR
48 W Transformer	TR-65242700-A-RF5.5
Master Switch	CIG2-MS-OCC-S
Ciglio2, 12" Molex Jumper Cable.....	CIG2-CABLE-12-B
Ciglio2, 24" Molex Jumper Cable.....	CIG2-CABLE-24-B

Warranty: Ciglio2 fixture, 5 years. Ciglio2 transformer, 3 year.