

move! price guide effective June 2008

SUPPLEMENTAL PRICE GUIDE

For all terms, conditions, finish options, ordering and shipping information please refer to: "retail price guide effective October 2007"



move! workstations

sit-to-stand adjustability

The move! crank tables are designed to meet a user's seated adjustability needs at an economical price range. The durable steel frame and feet are manufactured in 14 gauge oval tube with welded construction. Each upright leg encapsulates an individual worm gear mechanism that is transversed by a high performance self-lubricating bicycle chain for operation. The crank handle is top mounted by the user to maintain a neutral wrist position during raising or lowering. The only cross member is cantilevered to the rear of the frame and covered with a rubber material for additional use as a foot rest.

The single octagonal column Move! spring and electric table versions are created of durable steel with welded construction. Ease of movement during the transition from sit to stand range is enhanced and stabilized with eight roller bearings along the central shaft. The immediate response version is driven by two leaf springs creating linearity at all positions along the travel whether raising or lowering. The Move! electric version contains a power driven linear actuator which operates at 1.5" per second and lifts an operational load of 150 pounds. This model plugs into any 120 v outlet but operates through a transformer on 12 volt DC current.

All tables are cycle tested and static load tested to meet or exceed the required ANSI-Bifma standards.

adjustment





spring operation

gas spring to perform a braking function and lock out operation if the table weight is overloaded. The same mechanism also works as the dampener to provide soft starts and stops anywhere along the column or at full top or bottom position.



electric operation

Tables come standard with electronic controls for smooth 1.5" /sec adjustment from sit-tostand positions. Digital display and multi-setting controls available for an

specification guide

adiustment

crank spring electric

height range:

23" - 35.5" single surface crank 26" - 45" single surface spring 26" - 45" single surface electric



top configurations & layouts:

We make our tops to actual sizes to fit within panel systems and to meet ANSI / BIFMA standards.



weight load:

400 lb static weight load

220 lb operational load on CRANK 30 lb equipment load on SPRING 150 lb operational load on **ELECTRIC**

leg styles:

cantilevered 2 leg (crank)

single column V-base or H-base (spring & electric)

upgrades:

casters, leg mounted CPU holder, computer shelf

and voice data receptacles

frame options:

assembly:

charcoal • aluminum

5 mm allen wrench





CRANK move!

23" - 35.5" seated height range. available with casters. removable crank adjustment.

	standard list price			dimens	ions	
model	frame	width	/	depth	height	weight

	standard list price				sions			
model	frame			width	/	depth	height	weight
1607	1607	rectangle	\$799	30"		24''	23" - 35.5"	54 lbs
1608	1607	rectangle	\$829	36"		24"	23" - 35.5"	58 lbs
1609	1607	rectangle	\$849	42"		24"	23" - 35.5"	62 lbs
1614	1614	rectangle	\$976	55"		24''	23" - 35.5"	79 lbs
1615	1614	rectangle	\$997	60''		24"	23" - 35.5"	82 lbs
1705	1607	rectangle	\$839	30"		30"	23" - 35.5"	59 lbs
1706	1607	rectangle	\$871	36"		30"	23" - 35.5"	65 lbs
1709	1607	rectangle	\$892	42"		30"	23" - 35.5"	70 lbs
1714	1614	rectangle	\$1025	55"		30"	23" - 35.5"	89 lbs
1715	1614	rectangle	\$1045	60''		30"	23" - 35.5"	94 lbs



CRANK move! (organic)

kidney

kidney

1611

1607

1614

23" - 35.5" seated height range. available with casters. removable crank adjustment.

39"

58"

\$849

\$997

	standard list p	rice			dimen	sions	
model	frame		width	/	depth	height	weight
1610	1607 kidney	\$829	33"		24''	23" - 35.5"	56 lbs

24"

24"

23" - 35.5"



60 lbs





SPRING move! H-BASE


26" - 45" sit-to-stand height range. available with casters. H-Base is standard.

	standard li	st price			dimens	sions	
model	frame		width	/	depth	height	weight
1621	1621 rectang	e \$979	42''		24''	26" - 45"	92 lbs
1622	1621 rectana	e \$999	48''		24"	26" - 45"	96 lbs



SPRING move! (organic) V-BASE


26" - 45" sit-to-stand height range. available with casters. V-Base is standard.






SPRING move! (90° corner) V-BASE

26" - 45" sit-to-stand height range. available with casters. V-Base is standard.

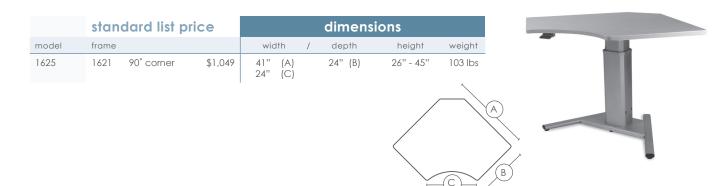

SPRING move! (120° corner) V-BASE

26" - 45" sit-to-stand height range. available with casters. V-Base is standard.





ELECTRIC move! H-BASE

26" - 45" sit-to-stand height range. available with casters. H-Base is standard





ELECTRIC move! (organic) V-BASE

26" - 45" sit-to-stand height range. available with casters. V-Base is standard.

	standard list	price			dimens	ions	
model	frame		width	/	depth	height	weight
1630	1628 kidney	\$1,379	39"		26"	26'' - 45''	95 lbs
1631	1628 kidney	\$1,399	45''		28"	26" - 45"	100 lbs







ELECTRIC move! (90° corner) V-BASE






	standard list p	rice		dimens	ions	
model	frame		width /	depth	height	weight
1632	1628 90° corner	\$1,449	41" (A) 24" (C)	24" (B)	26" - 45"	108 lbs
1633	1628 90° corner	\$1,499	47" (A) 32½" (C)	24" (B)	26" - 45"	118 lbs

ELECTRIC move! (120° corner) V-BASE

26" - 45" sit-to-stand height range. available with casters. V-Base is standard.

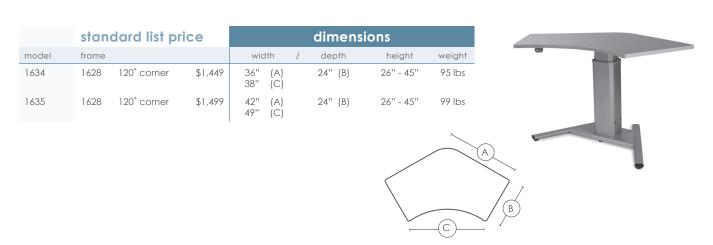

COLUMN MOUNTED SHELF move!

Attaches to frame via bracket; can be set in 3 column locations. (spring & electric only)

	standard list p	dimensio	ns			
model			width	depth	height	weight
1707	rectangle shelf	\$160	18''	12''	-	3 lbs
1708	bullet shelf	\$178	20''	20"	-	lbs





model 1708

model 1707

COLUMN MOUNTED CPU move!

CPU holder mounts to 3 locations on move! column; maximum load weight 30 lbs. (spring & electric only)

	standard list price	dimensio	ns		
model		width	depth	height	weight
3800	\$169	10''	123/4''	-	6 lbs



model 3800

CASTERS move!

locking casters for all move! tables

	standard list price	dimensio	nensions				
model			width	depth	height	weight	
8997	2" locking - CRANK set of four	\$27	2" dia	-	-	1lb/set	
8998	2" locking - SPRING & ELECTRIC set of five	\$34	2" dia	-	-	125 lb/set	



WIRE MANAGEMENT vertical

Universal vertical spine keeps cords and wires held neatly in place, weighted floor base. Universal twist ties are black with silver ends; includes 5 per package. Available in black only.

	standard list price	tower d	าร			
model	product		width	depth	height	weight
6630002	cyclical slinky channel	\$135	10"	10"	60"	
6630001	slinky wire kit: 3 rails, 12 clips	\$58	-	-	-	
4960	wire twist tie	\$ 24		-		1 lb



MANUEL

model 4960

model 663002

SIS-USA inc.

55 Wentworth Ave Londonderry, NH 03053-7414

tel: 800-374-7438 tel: 603-432-4495 fax: 603-434-8456 www.SISUSAinc.com