

Installation and Assembly - LCD Flush Mount Tube

Model: EXT 002

This product is to be used in combination with model PJC 100 Projector Mount and Ceiling Mount.

IMPORTANT! Read entire instruction sheet before you start installation and assembly.



Before you start check the parts list below to make sure all of the parts shown are included.

Parts List


Description	Qty.	Part Number
A flush mount tube	1	580-0004




⚠ WARNING

- Installer must verify that the ceiling will safely support four times the combined weight of all attached equipment and hardware.

- 1** Thread tube (A) into ceiling plate (ACC 570 shown) from top.

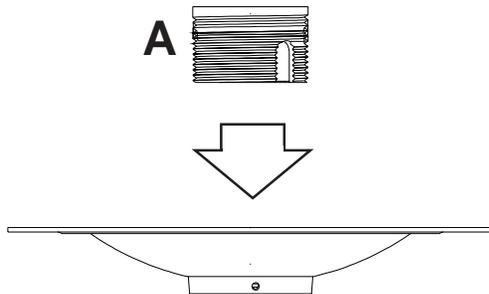

- 2** Screw ball and socket mount (PJC 100) to bottom of tube. Make sure at least four complete threads are engaged. Note: It may be necessary to hold tube from disengaging as you screw mount on.

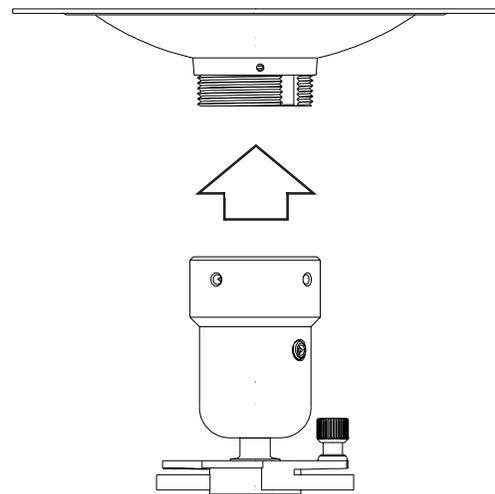

- 3** Attach security screw through hole in mount and notch in tube. For flush look, rotate mount counter-clockwise until top of mount is flush with bottom of ceiling plate. Next attach mount assembly to joist in ceiling according to instructions included in ceiling plate mount.

