



1/4-20 x 1/2"
phillips screw
and flat washer

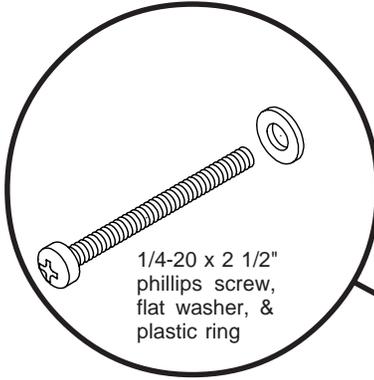

1/4-20 x 2 1/2"
phillips screw,
flat washer, &
plastic ring

External wall plates include special
toggles for attachment to 25 gage
minimum metal stud walls and
wood screws for attachment to
wood stud walls.

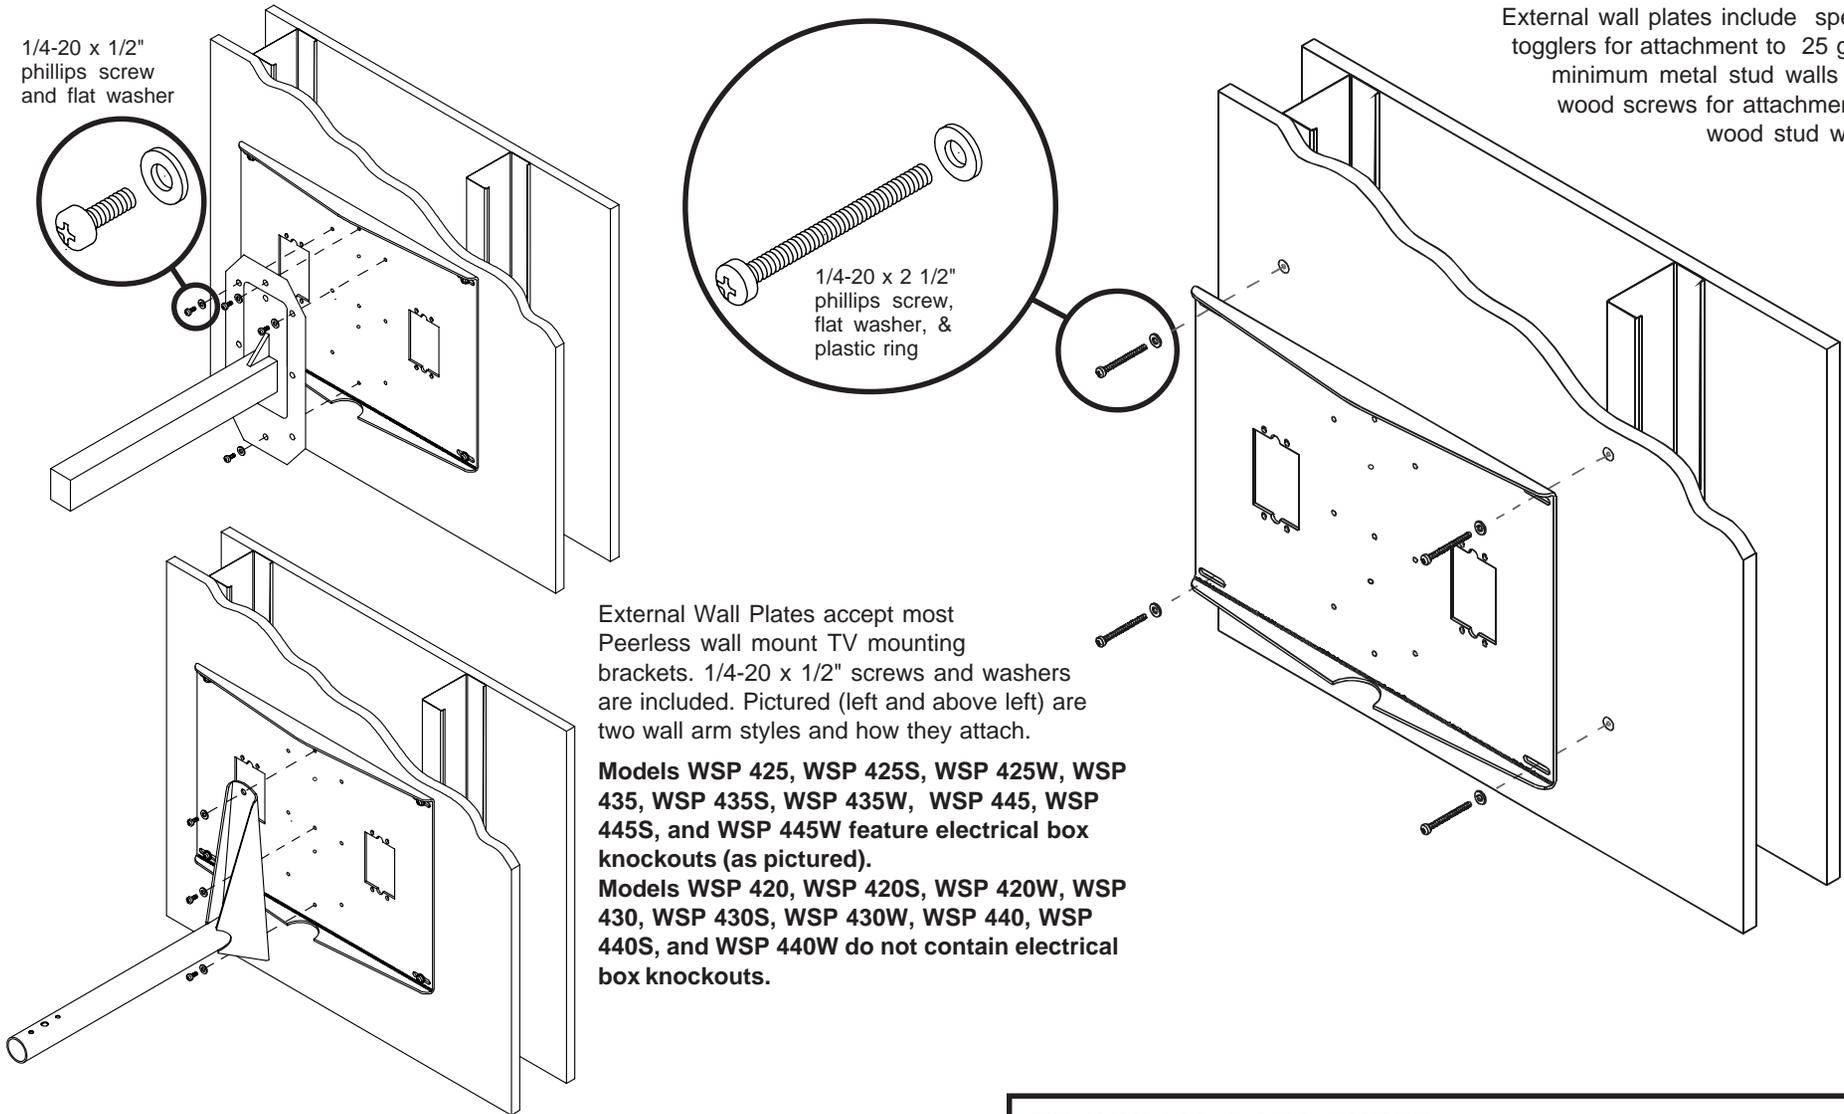

External Wall Plates accept most
Peerless wall mount TV mounting
brackets. 1/4-20 x 1/2" screws and washers
are included. Pictured (left and above left) are
two wall arm styles and how they attach.

**Models WSP 425, WSP 425S, WSP 425W, WSP
435, WSP 435S, WSP 435W, WSP 445, WSP
445S, and WSP 445W feature electrical box
knockouts (as pictured).**

**Models WSP 420, WSP 420S, WSP 420W, WSP
430, WSP 430S, WSP 430W, WSP 440, WSP
440S, and WSP 440W do not contain electrical
box knockouts.**

Architects Specifications:

The External Wall Plate shall be a Peerless model WSP_____ and shall be located where indicated on the plans. It shall be constructed of 10 gage cold rolled steel. It shall include special togglers for attachment to a 25 gage minimum metal stud wall, wood screws for attachment to a wood stud wall, and 1/4-20 x 1/2" screws for attachment of a Peerless TV Wall Mount to the External Wall Plate. The finish shall be scratch resistant Black, White, or Silver Fused Epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.

**TECHNICAL DATA SHEET
EXTERNAL WALL PLATES**

Peerless Industries, Inc.

3215 W. North Ave.
Melrose Park, IL 60160

phone: (708) 865-8870
fax: (708) 865-2941

MODELS: WSP 420, WSP420S, WSP 420W, WSP 425, WSP 425S, WSP 425W, WSP 430, WSP 430S, WSP 430W, WSP 435, WSP435S, WSP 435W, WSP 440, WSP 440S, WSP 440W, WSP 445, WSP 445S, WSP 445W

NOTES:



ALL DIMENSIONS: $\frac{\text{INCH}}{\text{MM}}$
UNLESS OTHERWISE SPECIFIED

CL = CENTER LINE

PART IS SYMMETRICAL

MATERIAL: 10 GAUGE COLD ROLLED STEEL

$.344 \times \frac{1.344}{8.7} \times \frac{1.344}{34.1}$ TYP.

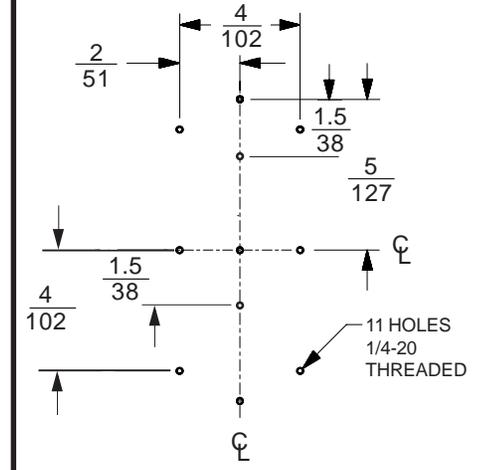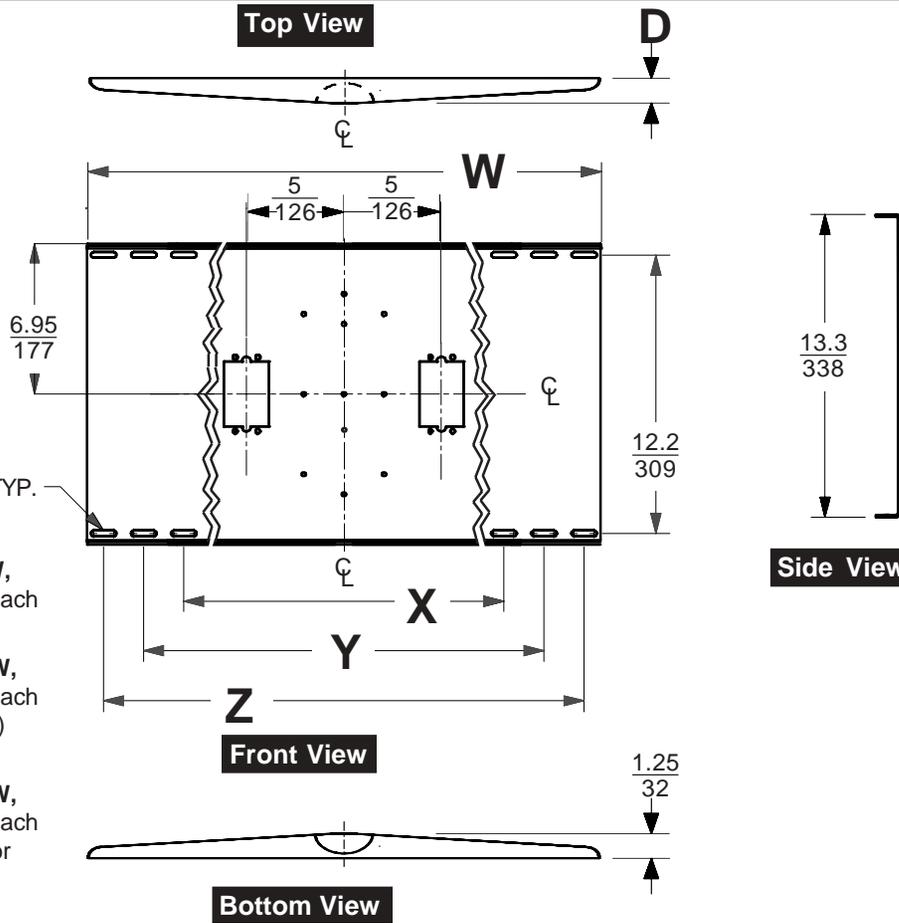


Models **WSP 420, WSP 420S, WSP 420W, WSP 425, WSP 425S, and WSP 425W** attach to studs on 16" (406 mm) centers.

Models **WSP 430, WSP 430S, WSP 430W, WSP 435, WSP 435S, and WSP 435W** attach to studs on 20" (508 mm) or 16" (406 mm) centers.

Models **WSP 440, WSP 440S, WSP 440W, WSP 445, WSP 445S, and WSP 445W** attach to studs on 24" (610 mm), 20" (508 mm) or 16" (610 mm) centers.

Mounting Hole Pattern

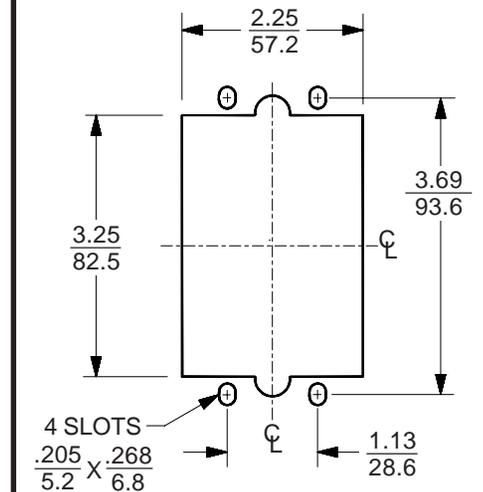

Electrical Box Knockout: WSP 425, WSP 425S, WSP 425W, WSP 435, WSP 435S, WSP 435W, WSP 445, WSP 445S & WSP 445W only.

	WSP 420, WSP 420S, WSP 420W	WSP 425, WSP 425S, WSP 425W	WSP 430, WSP 430S, WSP 430W	WSP 435, WSP 435S, WSP 435W	WSP 440, WSP 440S, WSP 440W	WSP 445, WSP 445S, WSP 445W
ELECTRICAL KNOCKOUTS	NO	YES	NO	YES	NO	YES
D	1.25 in. (32 mm.)		1.63 in. (41 mm.)		1.75 in. (44 mm.)	
W	17.7 in. (450 mm.)		21.7 in. (551 mm.)		25.7 in. (653 mm.)	
X 16 in. (406 mm.)	YES		YES		YES	
Y 20 in. (508 mm.)	NO		YES		YES	
Z 24 in. (610 mm.)	NO		NO		YES	
MAX. LOAD CAPACITY (WOOD STUD)	150 lbs. (68 kg.)		150 lbs. (68 kg.)		150 lbs. (68 kg.)	
MAX. LOAD CAPACITY (25 GA. METAL STUD)	125 lbs. (57 kg.)		125 lbs. (57 kg.)		125 lbs. (57 kg.)	
WEIGHT	9.9 lbs. (4.5 kg.)		12.4 lbs. (5.7 kg.)		14.8 lbs. (6.7 kg.)	
SHIPPING WEIGHT	11 lbs. (5 kg.)		14 lbs. (6.4 kg.)	13 lbs. (6.0 kg.)	16 lbs. (7.3 kg.)	15 lbs. (6.8 kg.)