


# Universal Ultra-Thin Flat Wall Mount

For 23" to 46" LCD Flat Panel Screens

#### **NEW!**

The world's thinnest mount, at only 0.4 inches thin, brings the screen closer to the wall than any other product in the industry. This near-invisible mount is ideal for ultrathin flat panels and supports the weight of standard screens. Its all-steel, universal design is the ultimate solution in delivering space-saving, ultra-sleek looks that bring the screen closer to the wall than any other mount in the world.

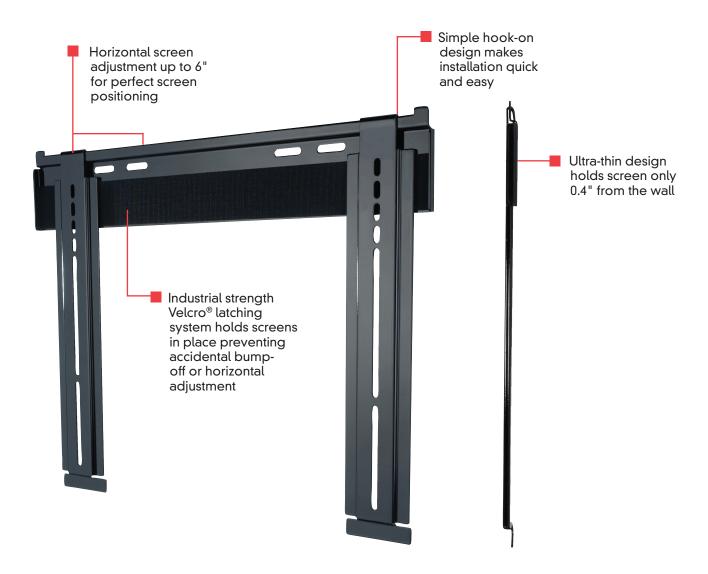





## Universal Ultra-Thin Flat Wall Mount

For 23" to 46" LCD Flat Panel Screens\*

Model Numbers SUF640P

### **Product Specifications**

- Ultra-thin design holds screen only 0.4" from the wall for a near-invisible application
- Universal mount compatible with ultra-thin LCD screens with mounting patterns up to 17.73" W x 12.94 H
- Universal brackets easily hook onto wall plate for an easy installation
- Industrial-strength Velcro® latching system secures screen adapters to wall plate in a single step, making installation fast and secure
- Horizontal screen adjustment of up to 6" (depending on screen model) for perfect screen placement
- Mounts to wood studs, concrete, cinder block or metal studs
- (metal stud accessory required) Comes with Peerless' Sorted-for-You™ fastener pack with all necessary screen attachment hardware

DIMENSIONS (W x H x D)

20.69" x 16.12" x 0.4" (52.6 x 40.9 x 1 cm)

LOAD CAPACITY

150 lb (68 kg)

PRODUCT WEIGHT

3.37 lb (1.52 kg)

**FINISH** 

**FEATURES** 

Scratch-resistant fused epoxy

**AVAILABLE COLORS** 

Gloss black

**ACCESSORIES** 

In-wall accessories box (IBA1) Metal stud fasteners (ACC215)

**PATENT** 

Patent pending

## Package Specifications

**PACKAGE CONTENTS** 

Wall plate, screen adapters, mounting and screen attachment hardware

**UNITS IN PACKAGE** 

PACKAGE SIZE (W x H x D)

22.375" x 2.375" x 5.25" (56.8 x 6.03 x 13.3 cm)

\* Screen Compatibility Requirements

screen before installation.

PACKAGE SHIP WEIGHT

4.7 lb (2.13 kg)

PACKAGE UPC CODE

735029258353

**WARRANTY** 

Limited 5-year

Peerless Industries, Inc. 3215 W. North Avenue, Melrose Park, IL 60160

www.peerlessmounts.com

The screen must have a flat mounting surface, or the mounting holes need to be on the furthest back surface of the screen. Input/output connection must be properly oriented to accommodate mounting 0.4" from the wall. In-wall accessory (IBA1) may provide additional clearance needed for plugs,

depending on their location on the back of the screen.

manufacturer's ventilation requirements for mounting your

The depth of this mount (0.4") may not provide sufficient space for proper ventilation on some screens. Refer to the screen

(800) 865-2112 (708) 865-8870 Fax: (708) 865-2941



Industrial strength Velcro® latching system holds screen in place against the wall plate preventing accidental bump-off or horizontal adjustment



LIT-0297