


Chief Security Anchor

The Chief Security Anchor allows you to use the NPT pipe or other architectural components as a secure anchor point for a cable. Please follow these instructions carefully:

1. Unpack and disassemble the Chief Security Anchor.
2. Place the U-bolt and clamping saddle around the NPT pipe or other architectural component

CAUTION: Do not over-tighten the U-bolt. Over tightening the U-bolt may cause difficulty during final assembly.

3. Thread the nuts onto the threaded ends of the U-bolt and, using a wrench, tighten the nuts on each side of the U-bolt ½ turn.
4. Slide the security shroud over the threaded ends of the U-bolt until its holes align with the holes in the clamping saddle.
5. Holding the security shroud in place, pass the security cable through the hole.

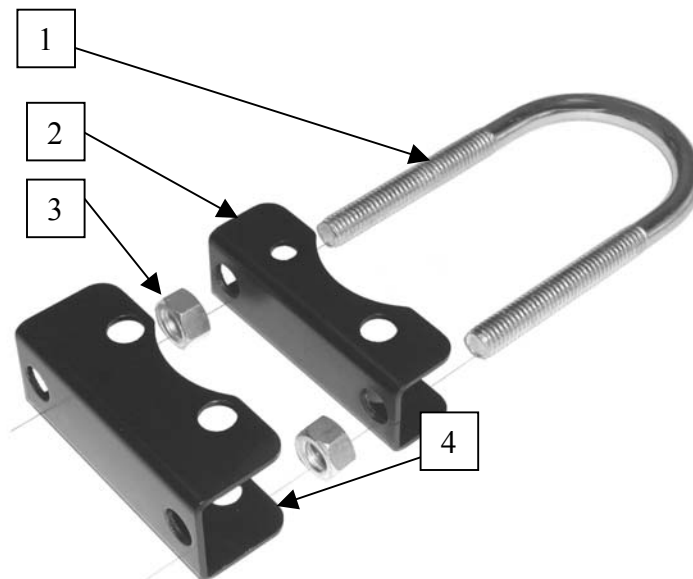

Item	Nomenclature	Quantity
1	U-bolt	1
2	Clamping Saddle	1
3	Nut	2
4	Security Shroud	1

8810-000009