

INSTALLATION INSTRUCTIONS

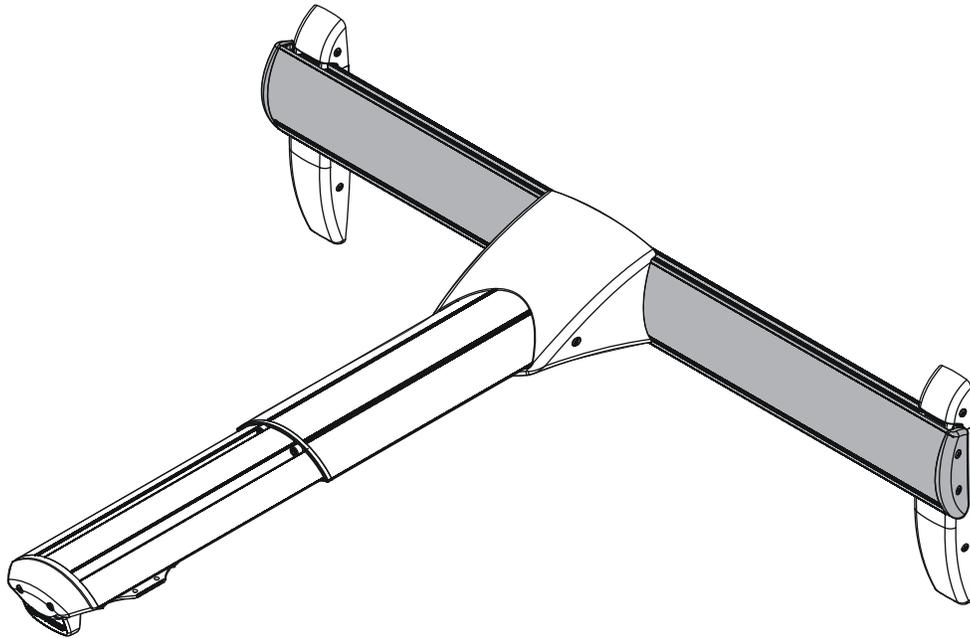

24" Stud Accessory for Short Throw Mounts

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.



WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component. The wall to which the mount is being attached may have a maximum drywall thickness of 5/8" (1.6cm).



IMPORTANT WARNINGS AND CAUTIONS!




WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.




CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

TOOLS REQUIRED FOR INSTALLATION

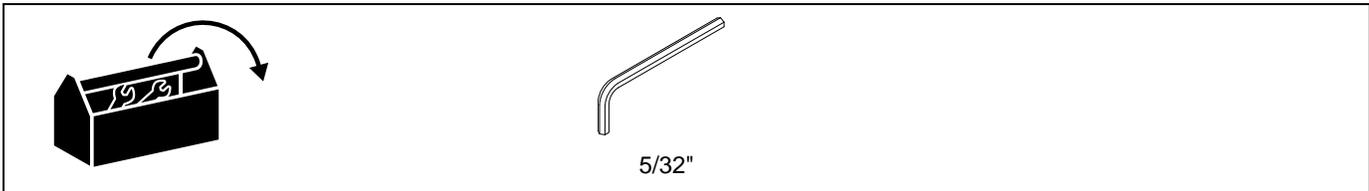

PARTS

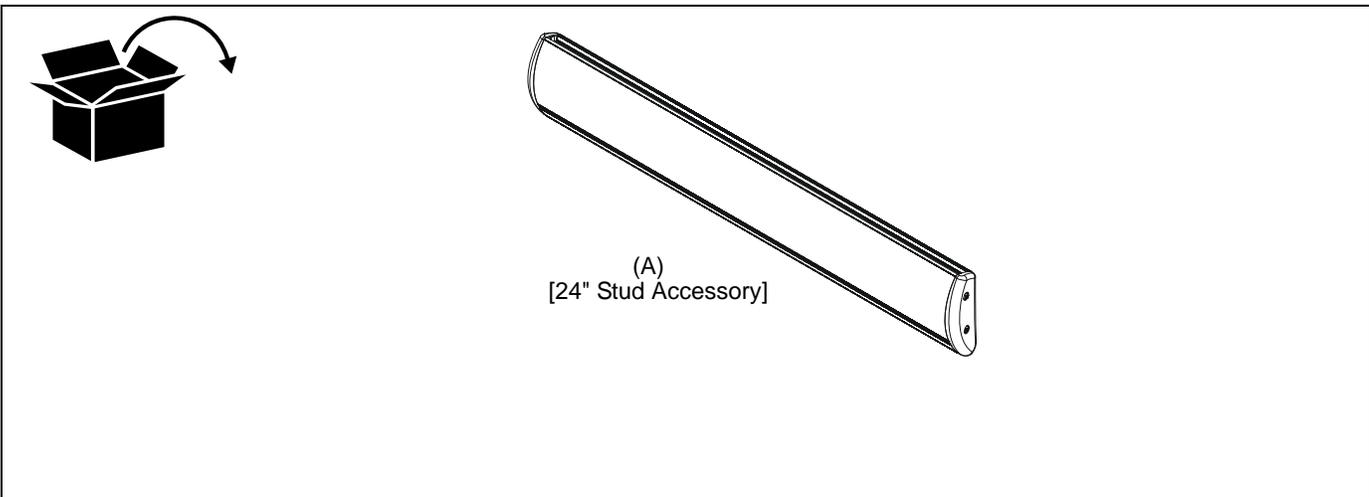

Assembly And Installation

1. Remove two flat head cap screws from dual stud short throw projector mounting bracket. (See Figure 1)

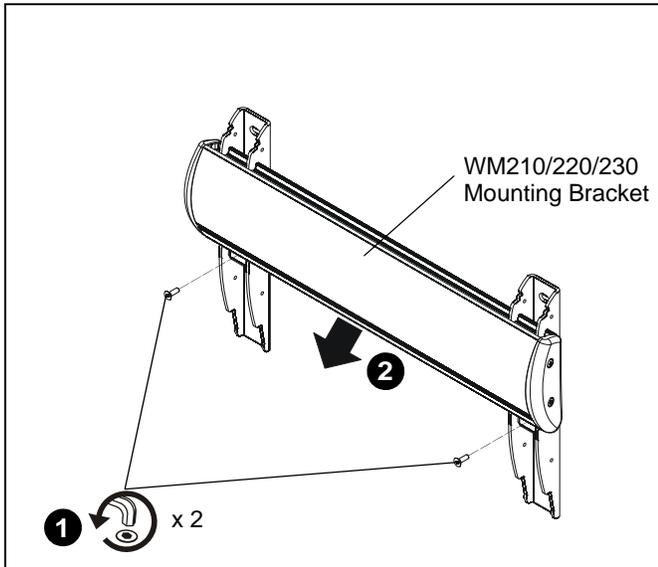


Figure 1

2. Remove existing cross bar from vertical mounting brackets. (See Figure 1)
3. Place vertical mounting brackets on MWAL24 accessory equally apart from each other as the width of the studs on the wall which the mount will be installed. (See Figure 2)

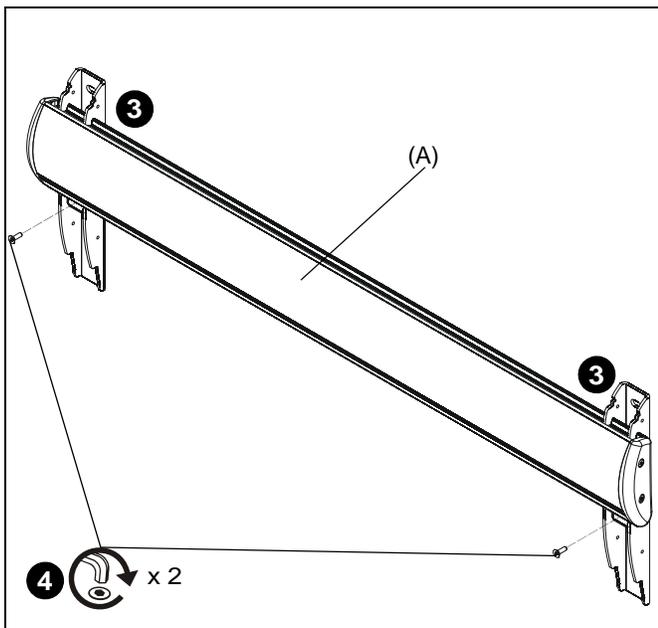


Figure 2

4. Reinstall two screws removed in Step 2 to secure vertical brackets to WMAL24. (See Figure 2)
5. Complete projector installation according to WM210-220-230 Installation Instructions.



Our Mounts. **Your Vision.**

Chief Manufacturing, a products division
of Milestone AV Technologies

8802-002038 REV 00
©2009 Milestone AV Technologies, a
Duchossois Group Company
www.chiefmfg.com
06/09

USA/International A 8401 Eagle Creek Parkway, Savage, MN 55378
P 800.582.6480 / 952.894.6280
F 877.894.6918 / 952.894.6918

Europe A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands
P +31 (0)40 2668620
F +31 (0)40 2668615

Asia Pacific A Room 24F, Block D, Lily YinDu International Building
LuoGang, BuJi Town, Shenzhen, CHINA.
深圳市布吉罗岗村百合银都国际大厦D栋24F
P +86-755-8996 9226
F +86-755-8996 9217

