



STAXX™

Installation Instructions

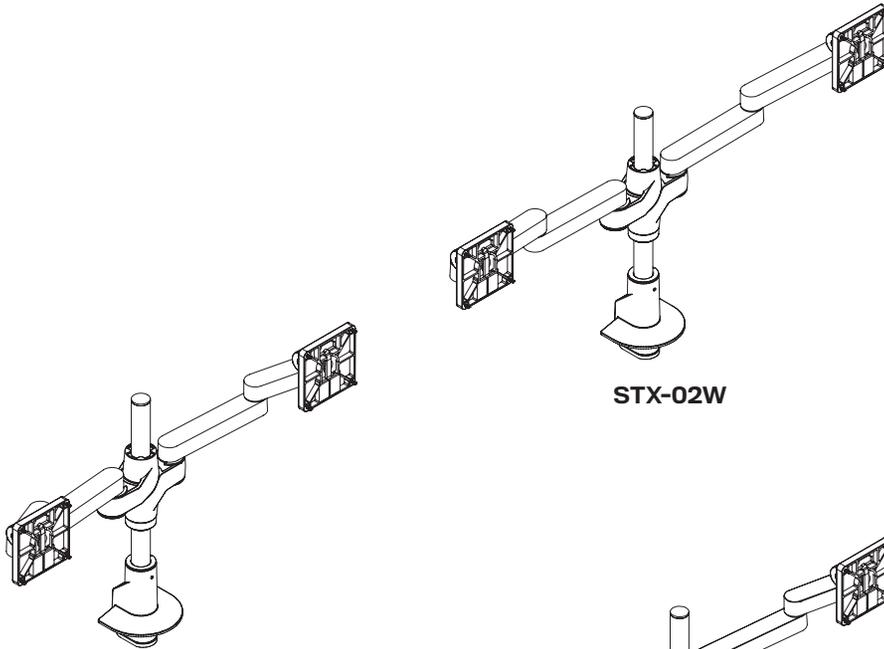


STX-02S

STX-02W








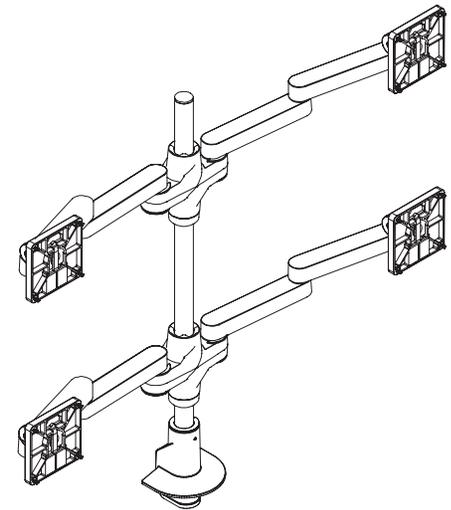


STX-22W

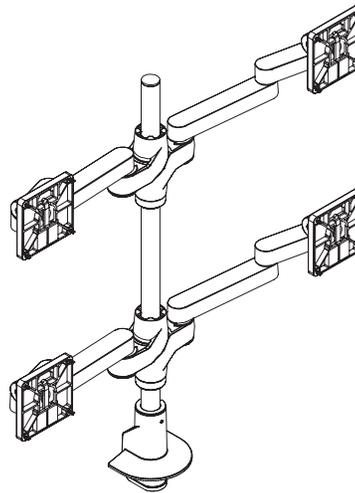


STX-22S

PARTS LIST



<p>A Top Down Mount 8524</p> 	<p>F Bushing Adapter 112945</p> 	<p>K Monitor Tilter 8500 Tilter</p> 	<p>P Cable Cap 114810</p> 	<p>U* Spacer 701544</p> 
<p>B Dimpled Pole 110607-14</p> 	<p>G Rotation Stop for Extension Arms 113703</p> 	<p>L Dog Washer 105189</p> 	<p>Q 1/8" Allen Wrench 701312</p> 	<p>V* Lock Nut 710015</p> 
<p>C Stackable Mount 413054</p> 	<p>H 10-32 x 5/8" Phillips Pan Head Screw 702200</p> 	<p>M 10-32 x 3/8" FPhMS w/Lock Patch 705198</p> 	<p>R 3/32" Allen Wrench 700146</p> 	
<p>D Pole Collar 113332</p> 	<p>I Quick Connect VESA Plate 114808</p> 	<p>N Pole Cap 105195</p> 	<p>S 7/32" Allen Wrench 701127</p> 	
<p>E Pole Clip 113449</p> 	<p>J M4 x 12mm Phillips Pan Head Screw 701153</p> 	<p>O Cable Clip 104533</p> 	<p>T* M8 x 95mm SCHS 716061</p> 	

DESK CLAMP CONFIGURATION


1



Desk thickness
up to 1.5" (3.8 cm)


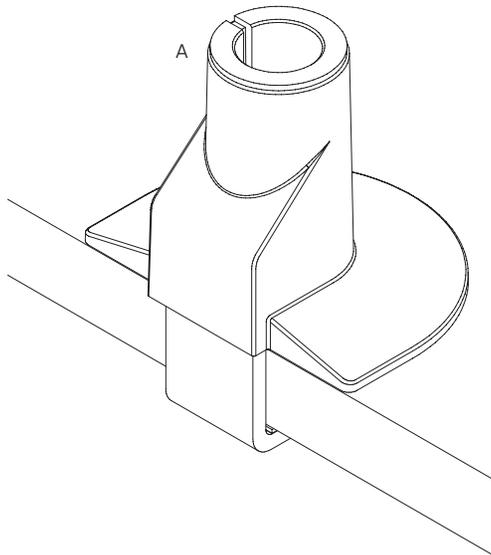


Desk thickness
up to 1.5" (3.8 cm)

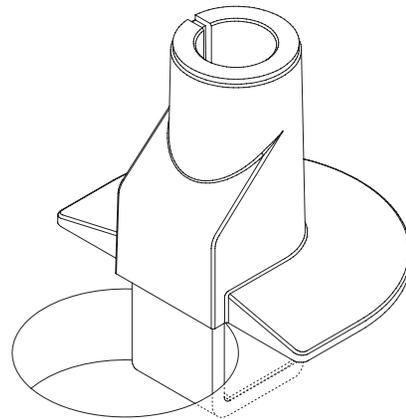


OR

2

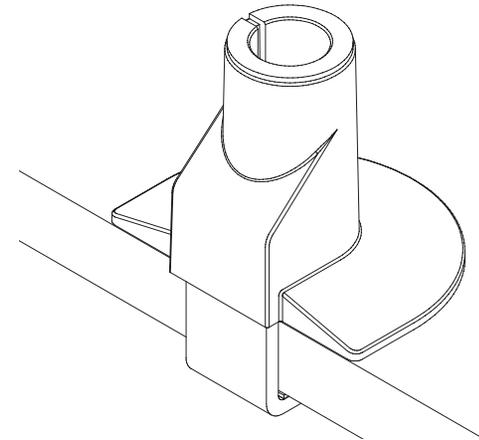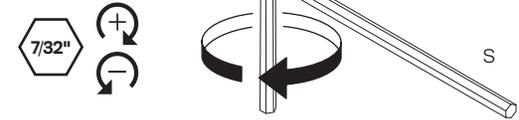


i If the monitor arm or pole does not easily fit into the mount, remove the bushing from the mount and place it on the monitor arm or pole and press firmly back into the mount.

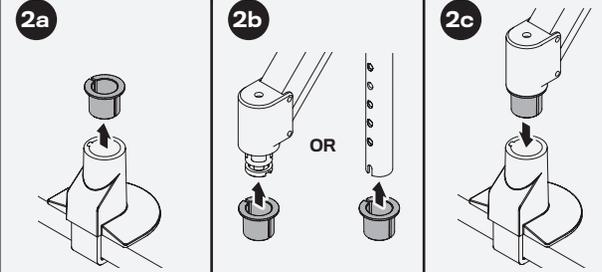




THRU-DESK CONFIGURATION*


3

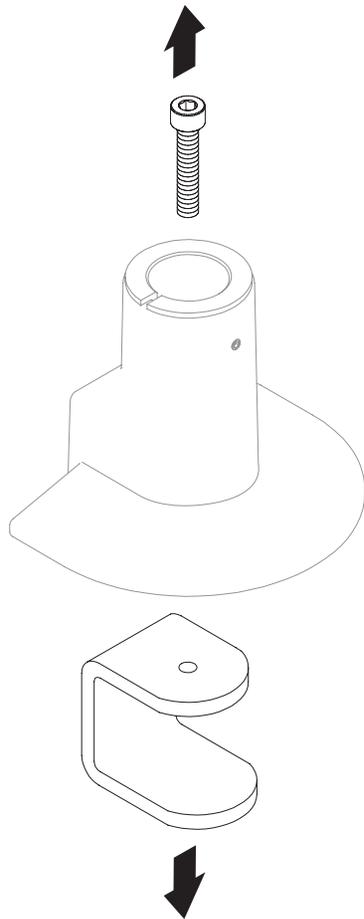



4

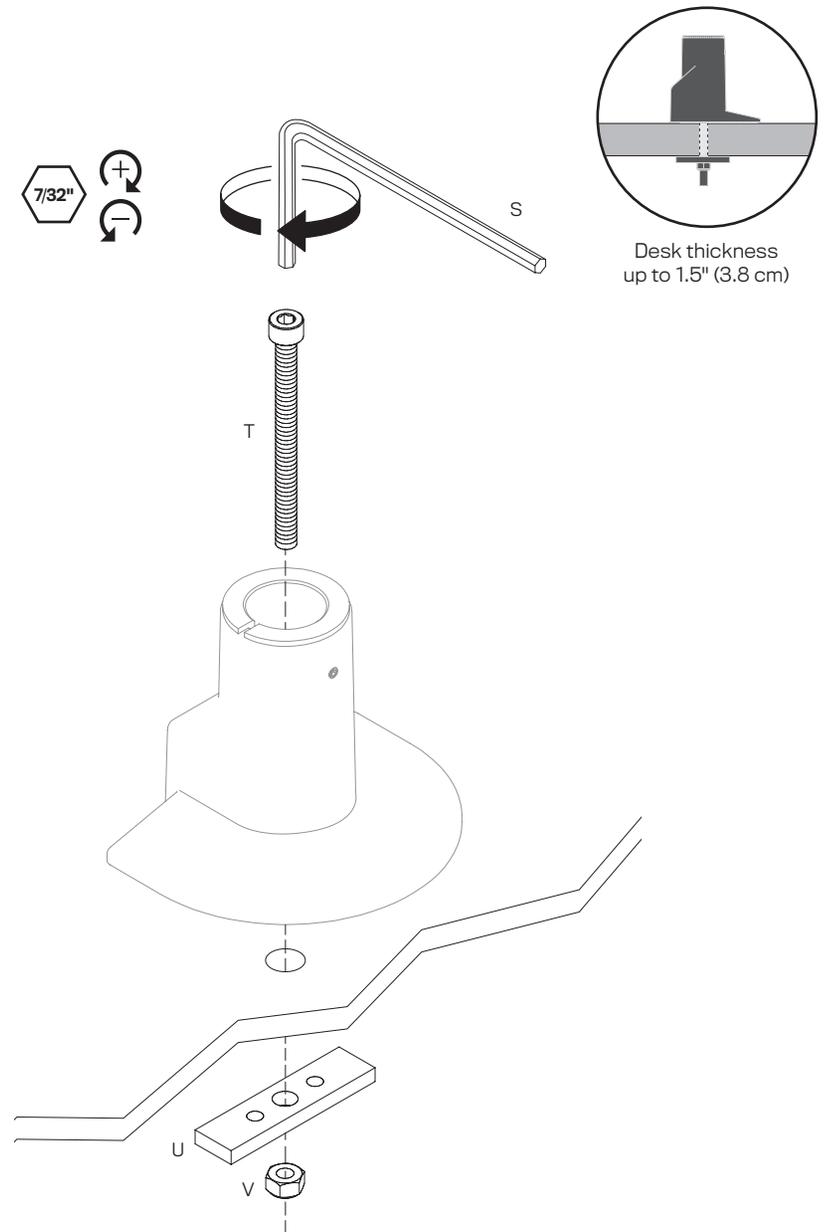

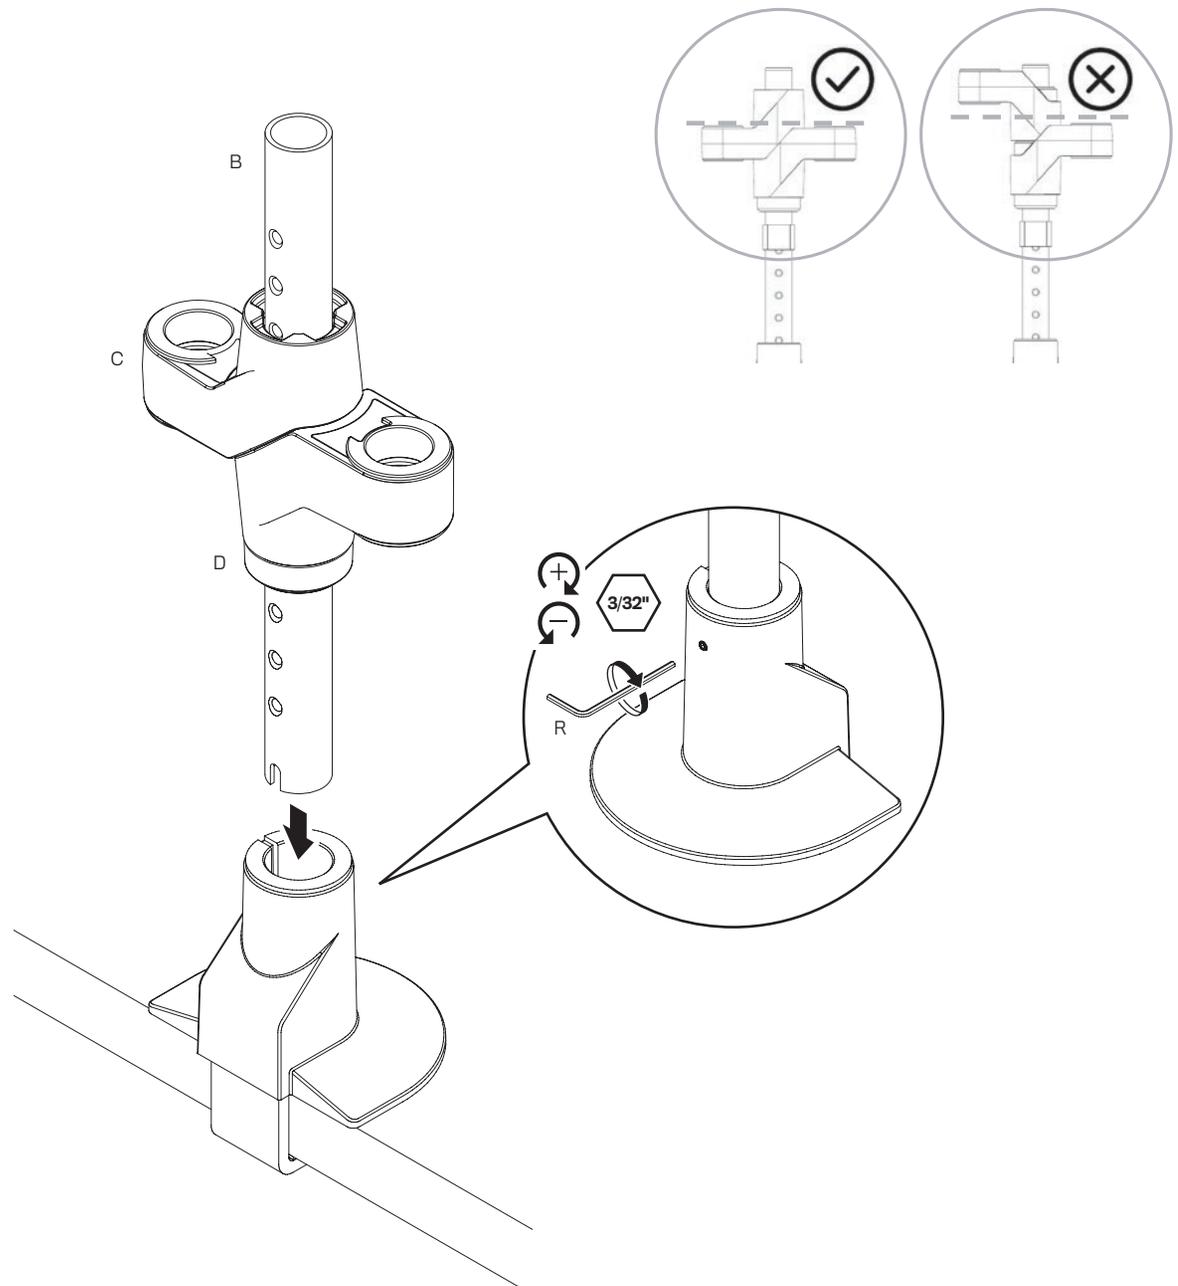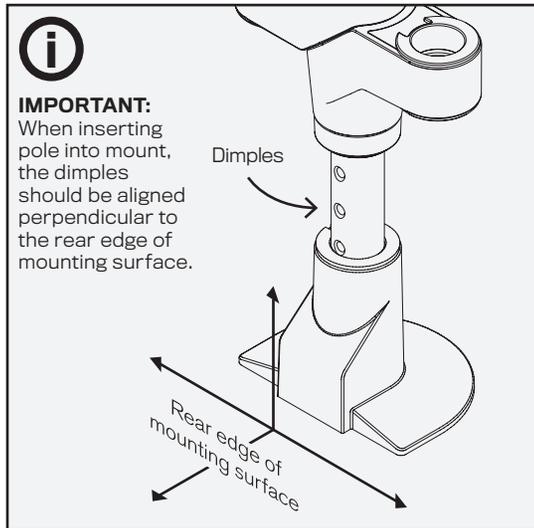

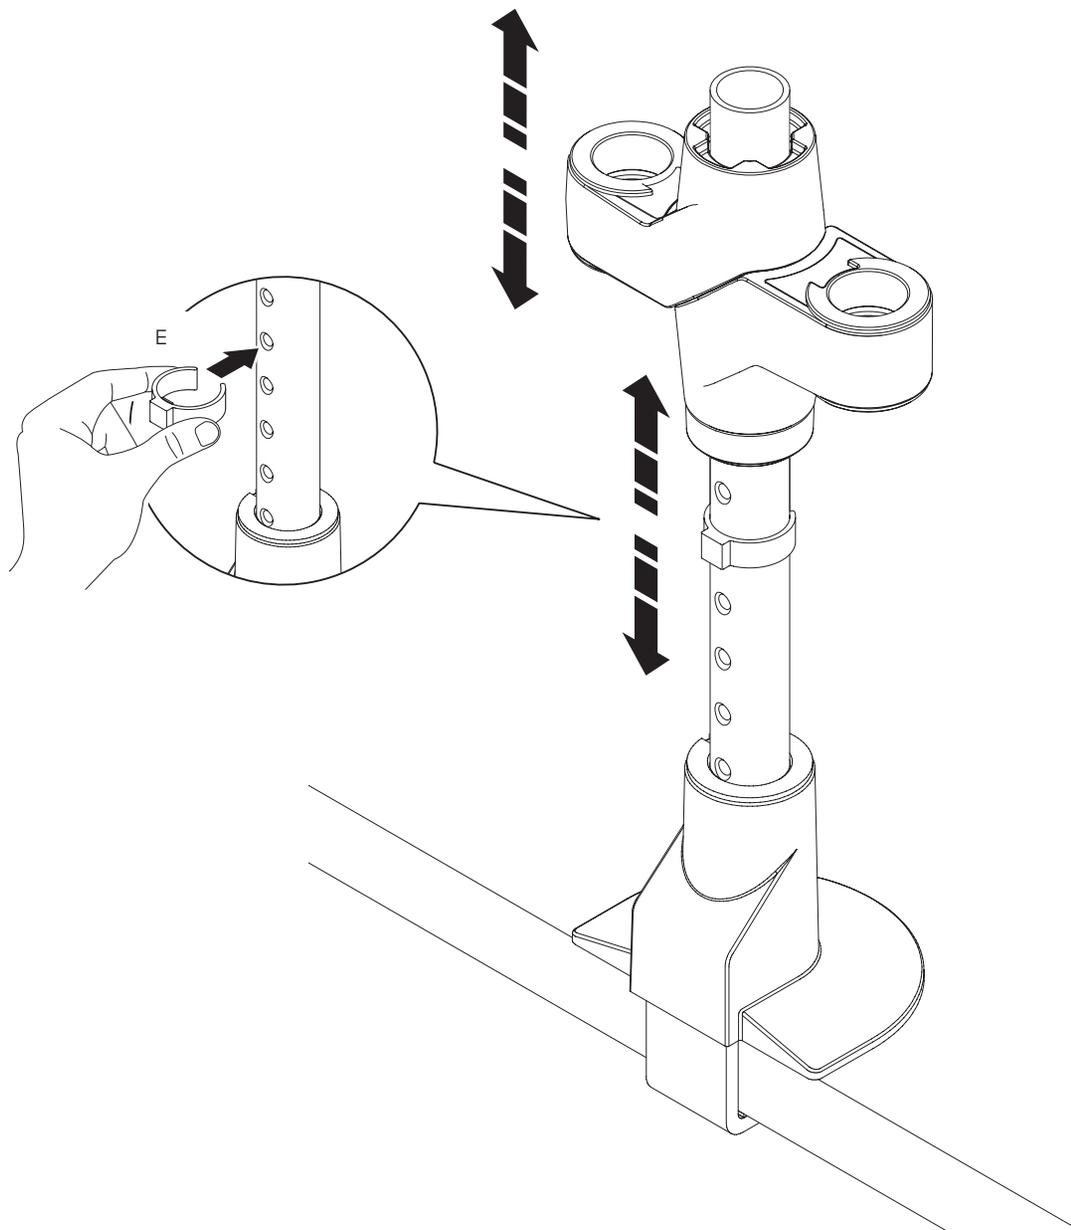

7

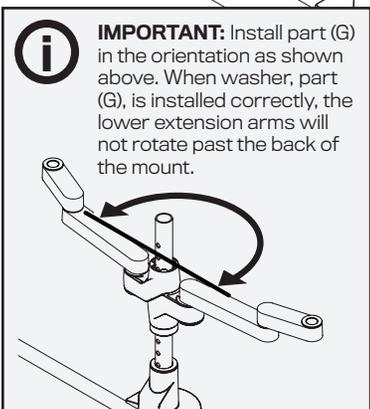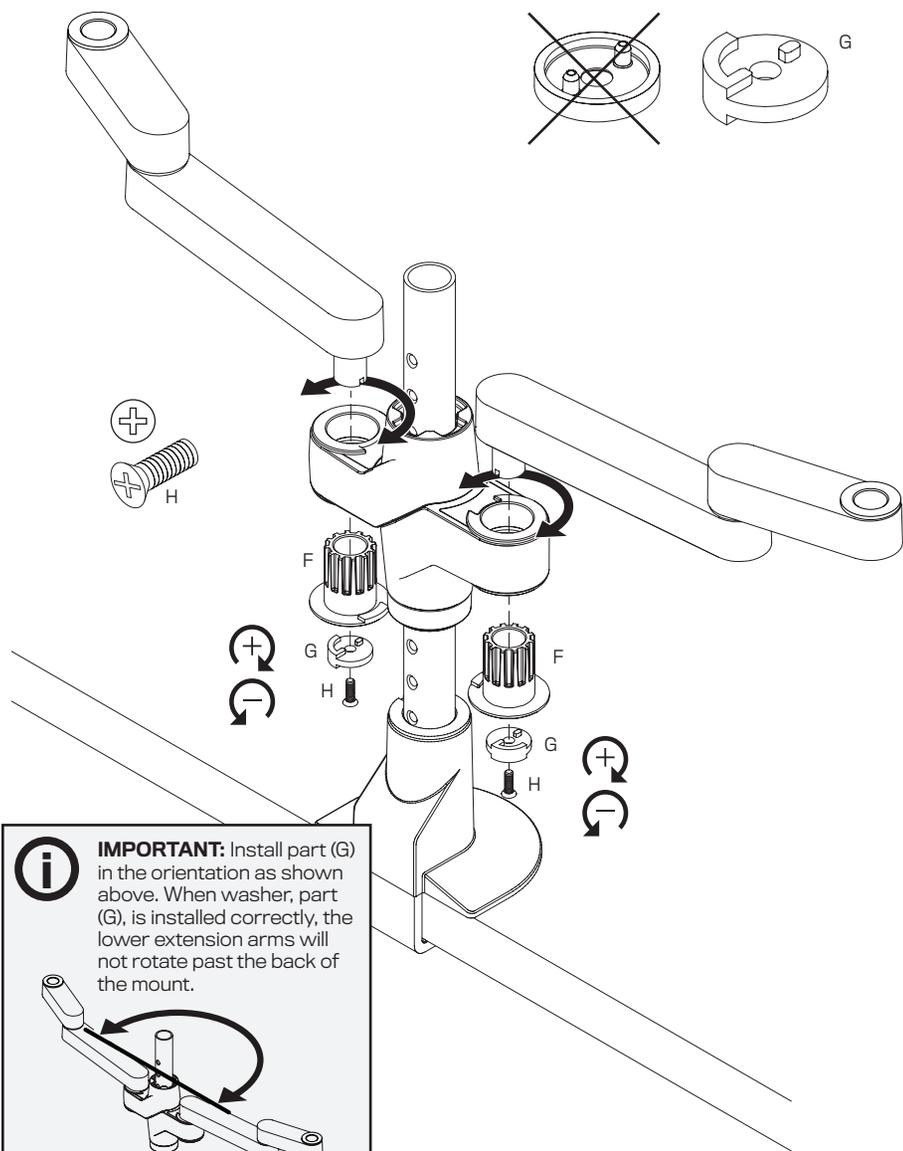

8

