











STX-02-SLD

PARTS LIST


<p>A Top Down Mount 1x 8524</p> 	<p>F Bushing Adapter 2x 112945</p> 	<p>K 9-inch Beam Assembly 2x 416088</p> 	<p>P 1/8" Allen Wrench 1x 701312</p> 	<p>U* Spacer 1x 701544</p> 
<p>B Dimpled Pole 1x 110607-14</p> 	<p>G Rotation Stop for Extension Arms 2x 113703</p> 	<p>L Dog Washer 2x 105189</p> 	<p>Q 3/32" Allen Wrench 1x 700146</p> 	<p>V* Lock Nut 1x 710015</p> 
<p>C Stackable Mount 1x 413054</p> 	<p>H 10-32 x 5/8" Phillips Pan Head Screw 2x 702200</p> 	<p>M 10-32 x 3/8" FPhMS w/Lock Patch 2x 705198</p> 	<p>R 7/32" Allen Wrench 1x 701127</p> 	
<p>D Pole Collar 1x 113332</p> 	<p>I Quick Connect VESA Plate 2x 114808</p> 	<p>N Pole Cap 1x 105195</p> 	<p>S 4mm Allen Wrench 1x 709877</p> 	
<p>E Pole Clip 1x 113449</p> 	<p>J M4 x 12mm Phillips Pan Head Screw 8x 701153</p> 	<p>O Cable Clip 1x 104533</p> 	<p>T* M8 x 95mm SCHS 1x 716061</p> 	

DESK CLAMP CONFIGURATION

1





Desk thickness
up to 1.5" (3.8 cm)





Desk thickness
up to 1.5" (3.8 cm)


OR

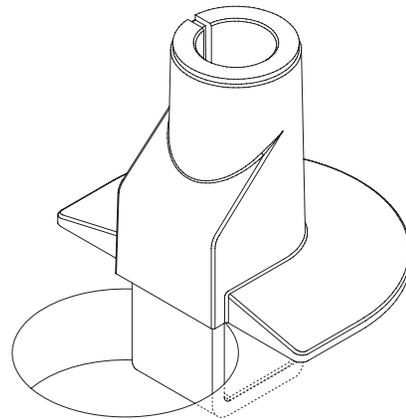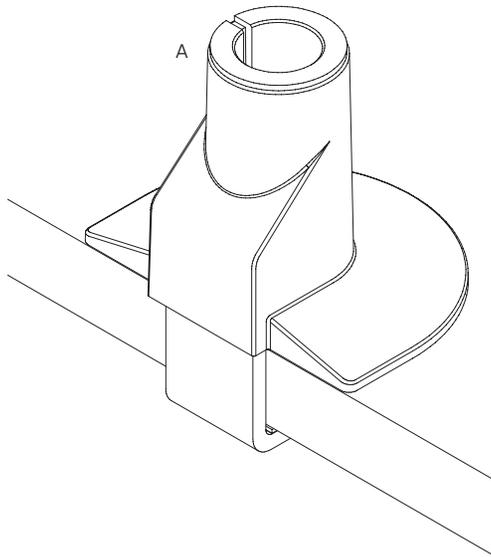

2

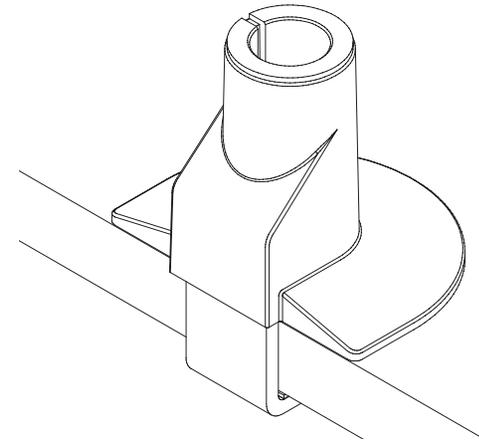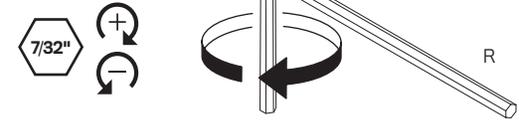


i If the monitor arm or pole does not easily fit into the mount, remove the bushing from the mount and place it on the monitor arm or pole and press firmly back into the mount.

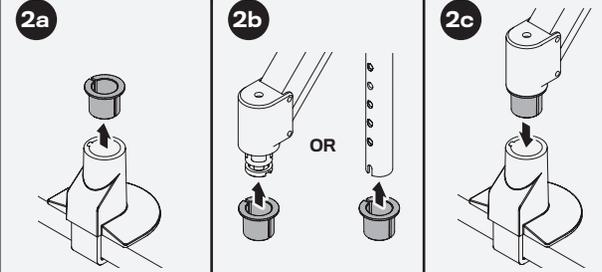




THRU-DESK CONFIGURATION*


3

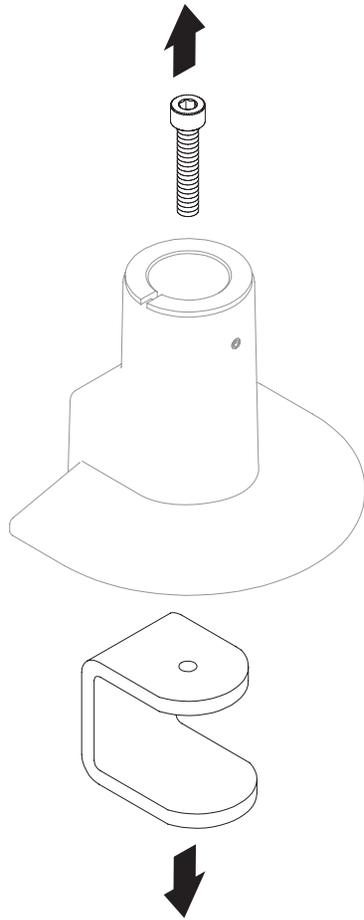


4

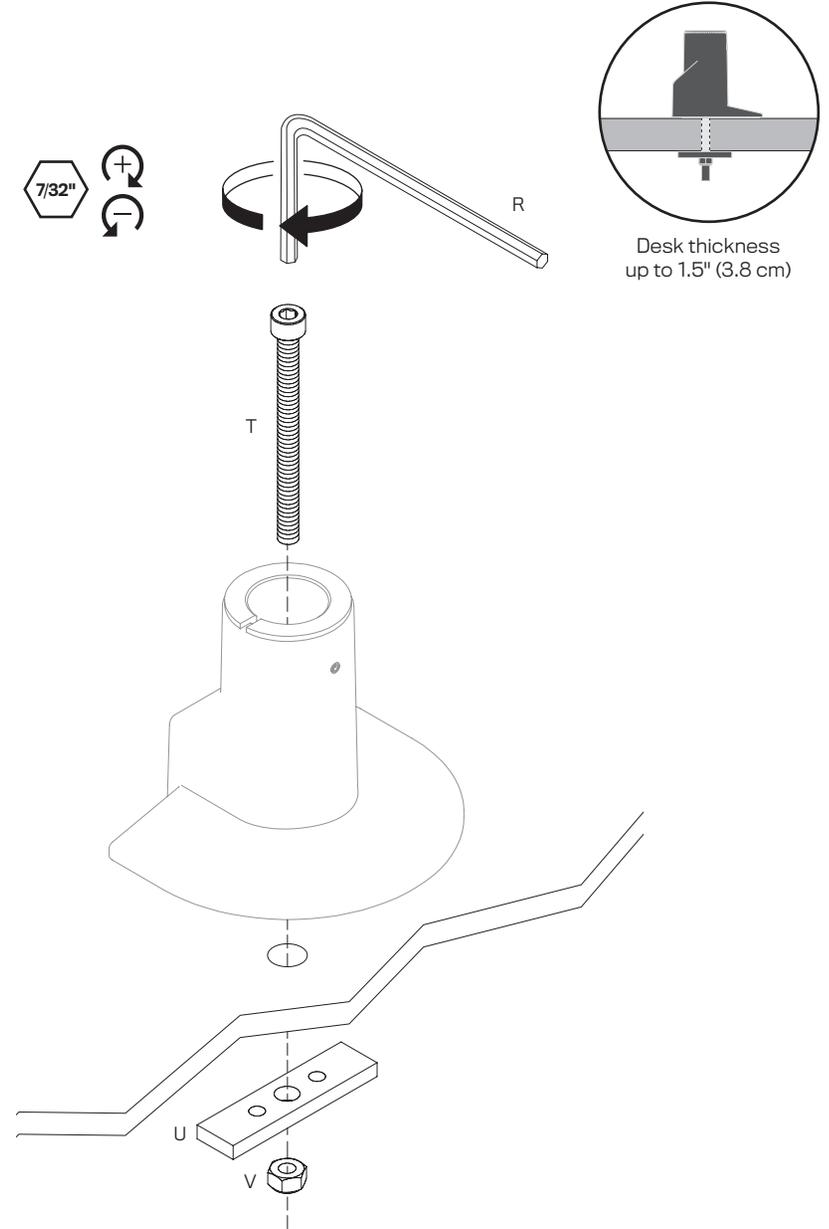

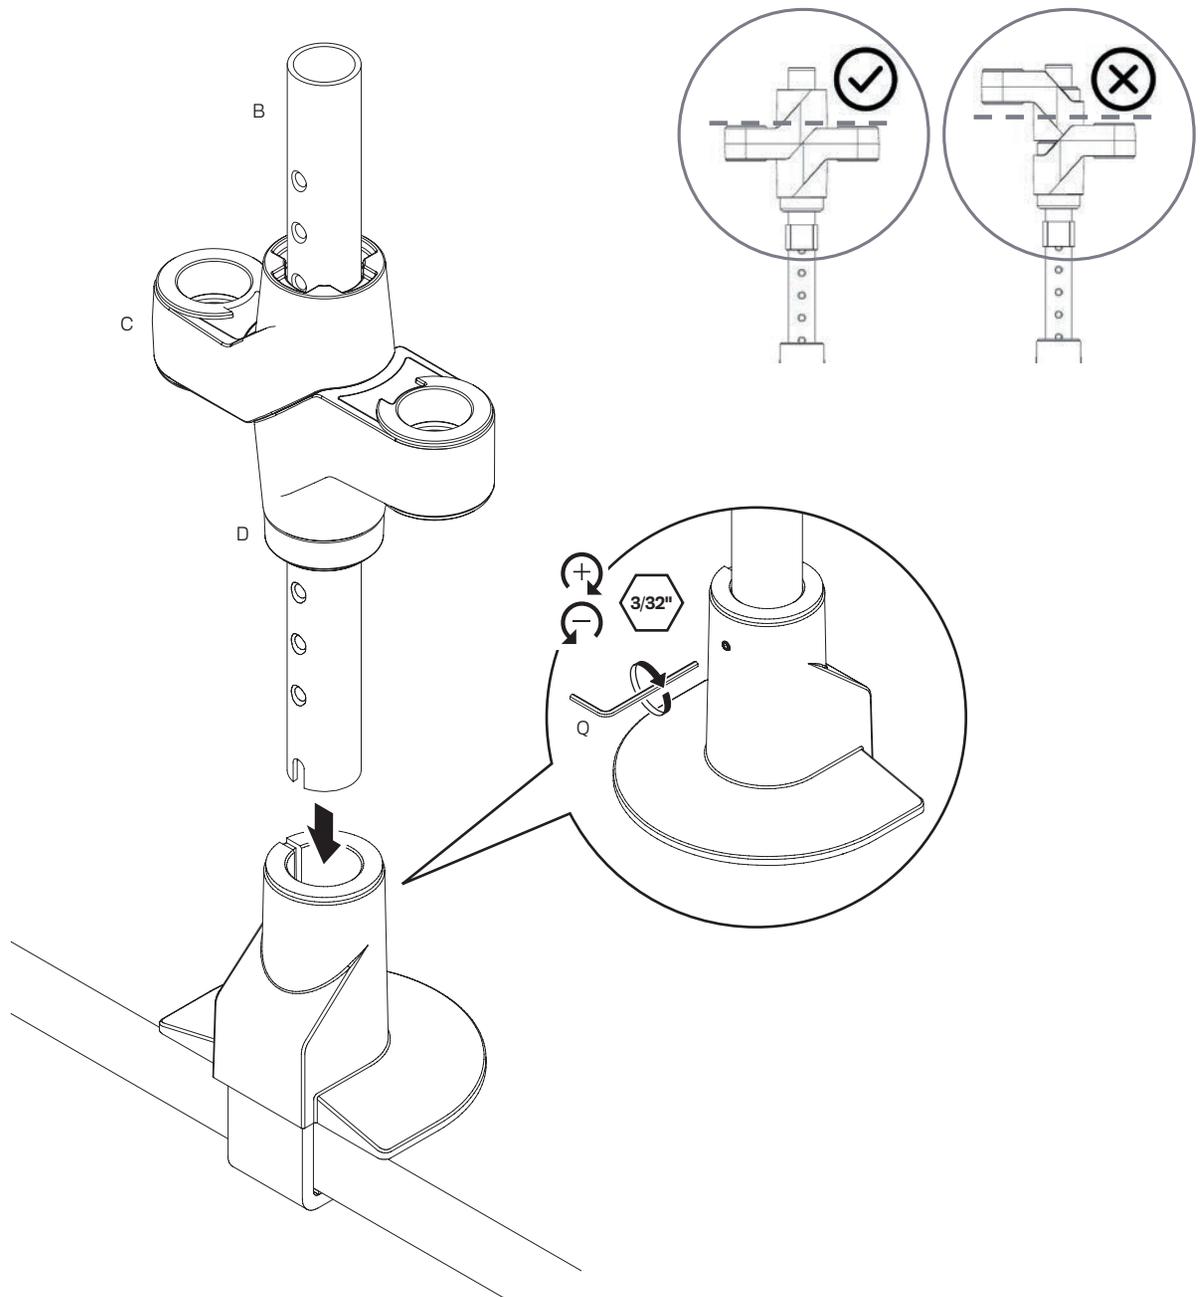
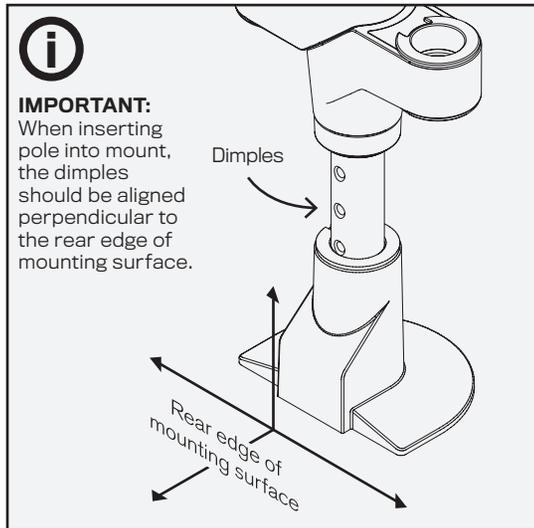


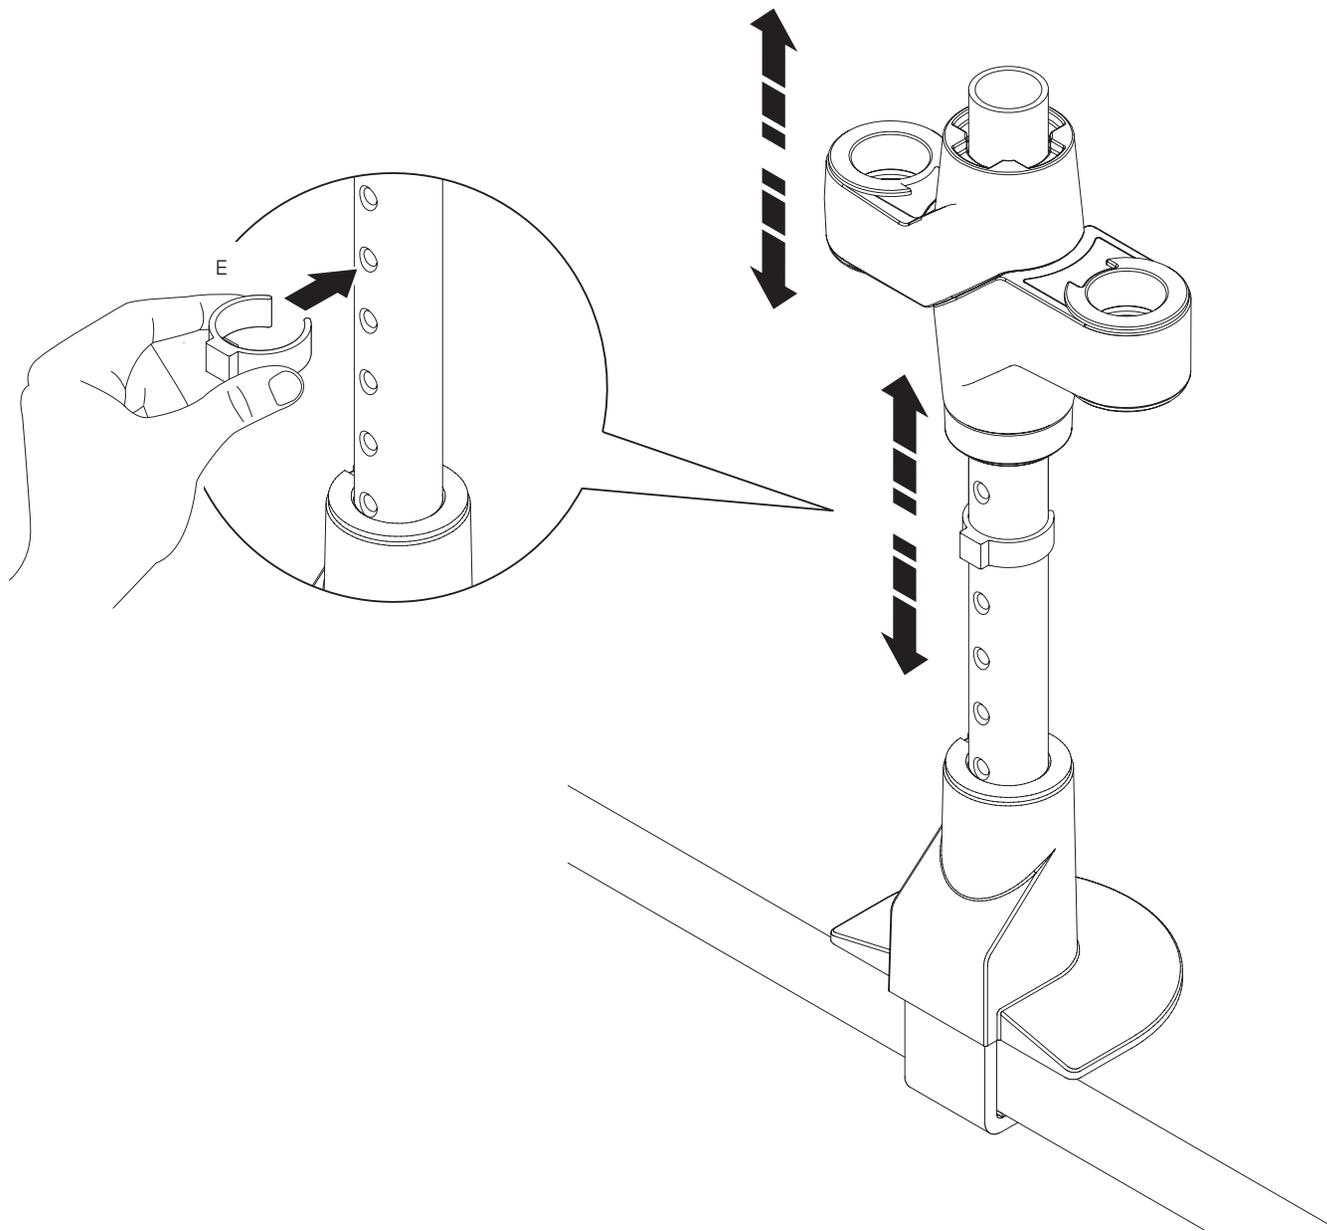


7

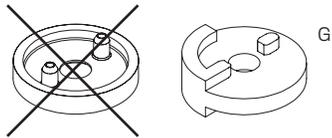


i **IMPORTANT:** Install part (G) in the orientation as shown. When washer, part (G), is installed correctly, the lower extension arms will not rotate past the back of the mount.

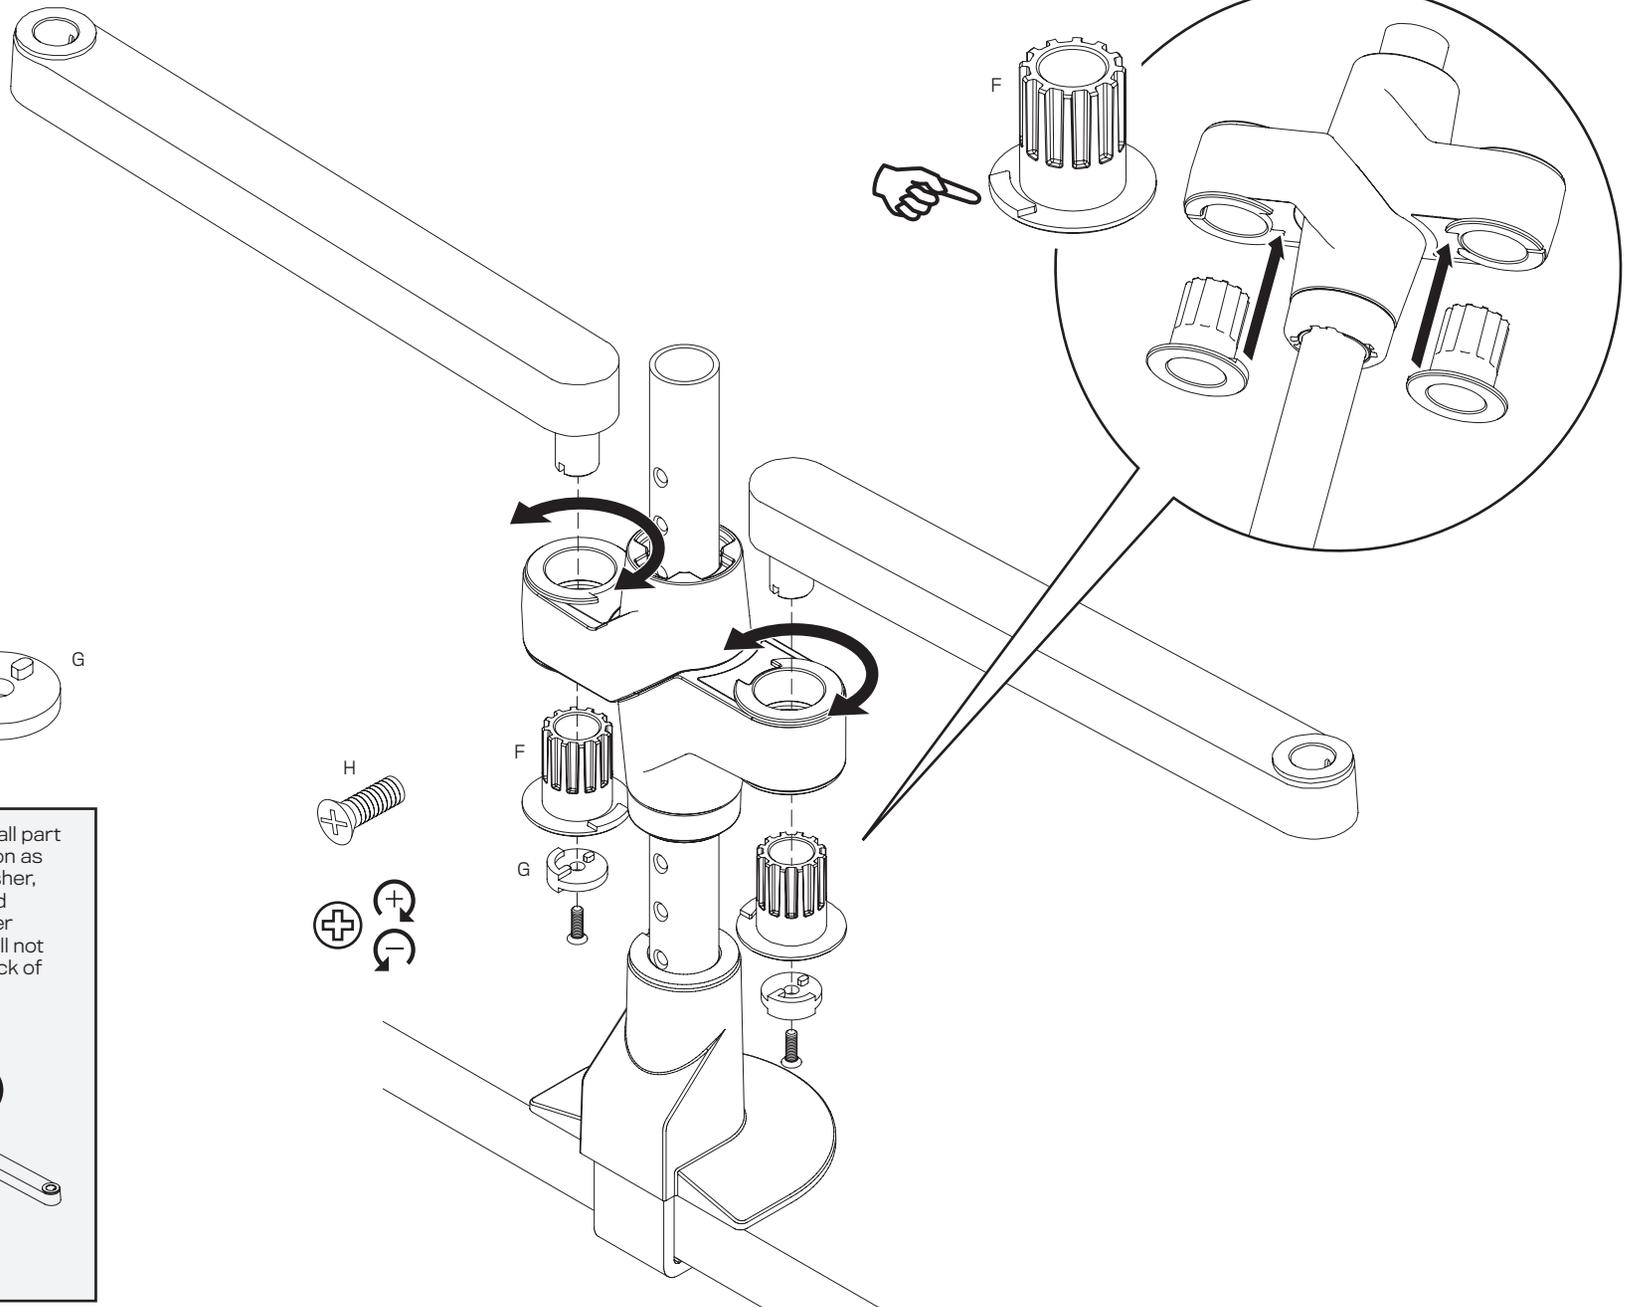
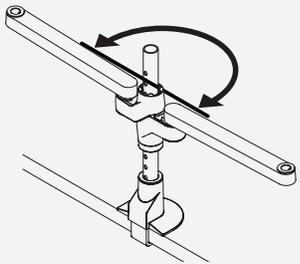


2x

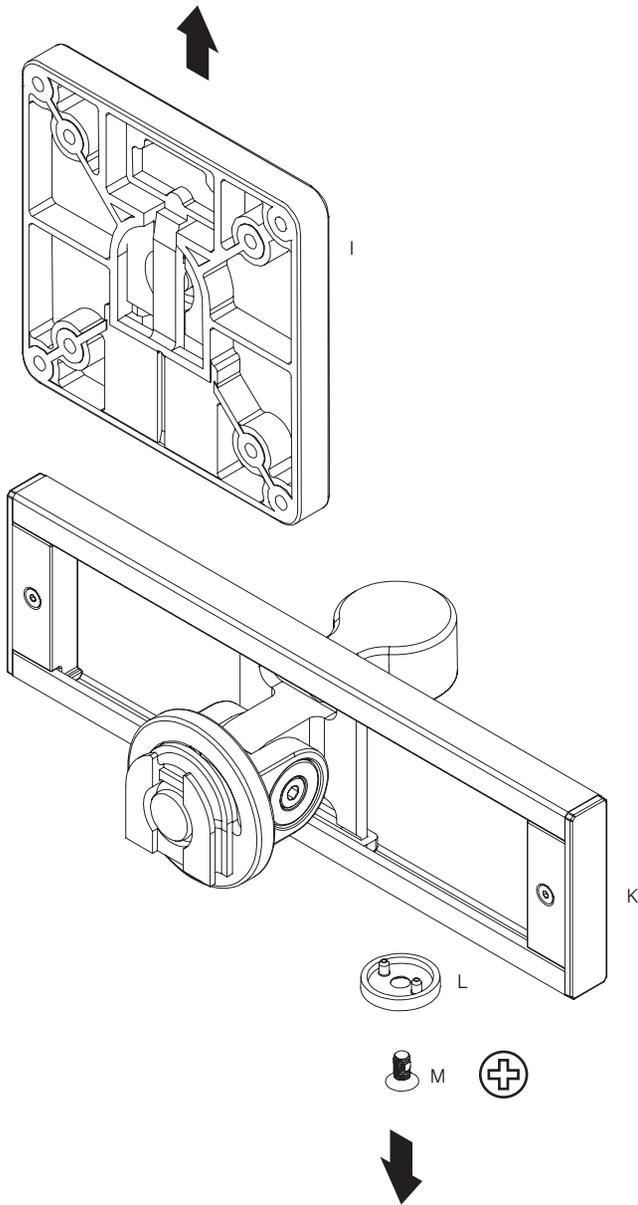

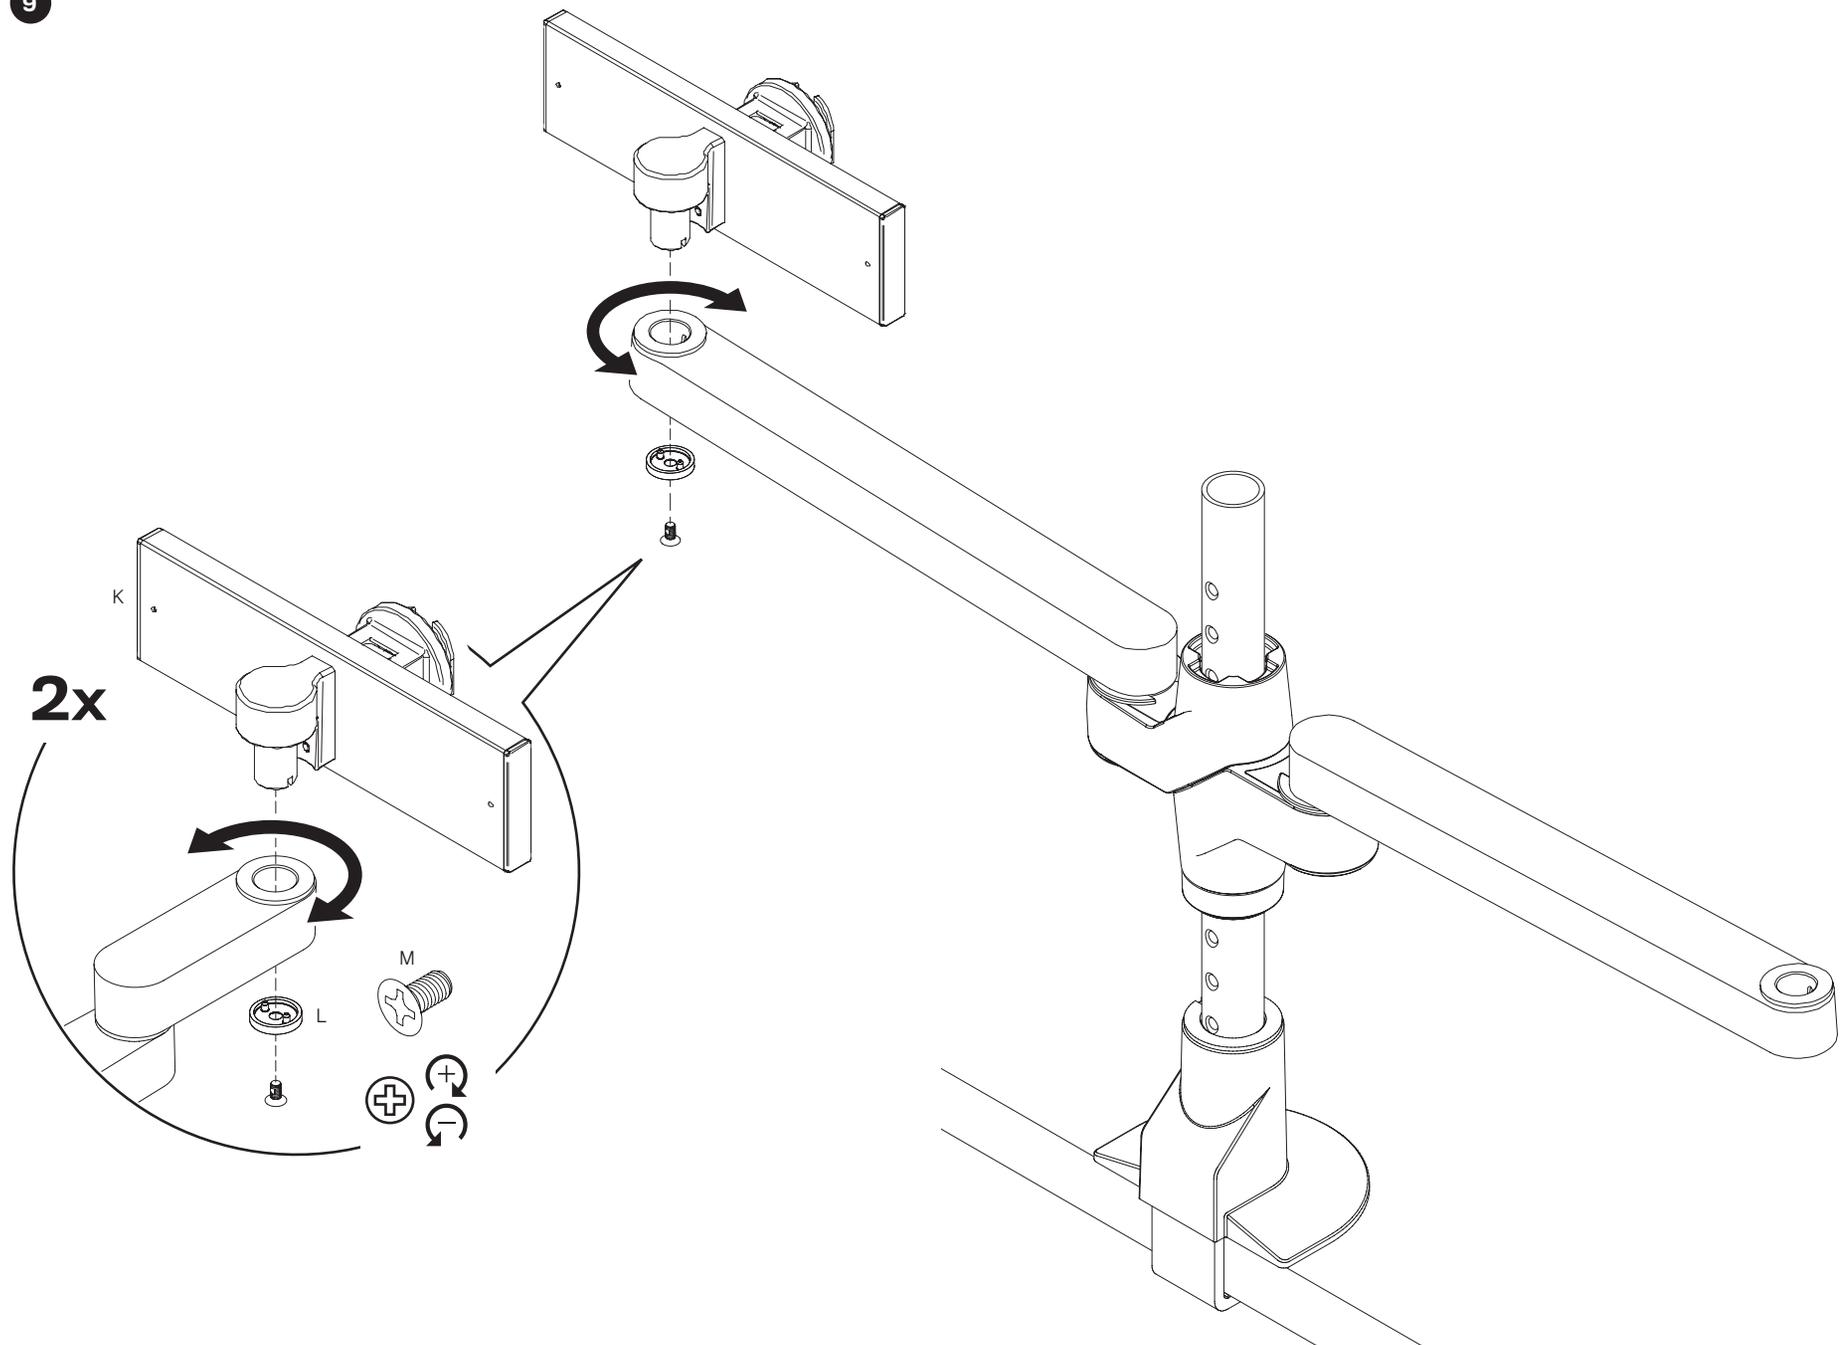

2x

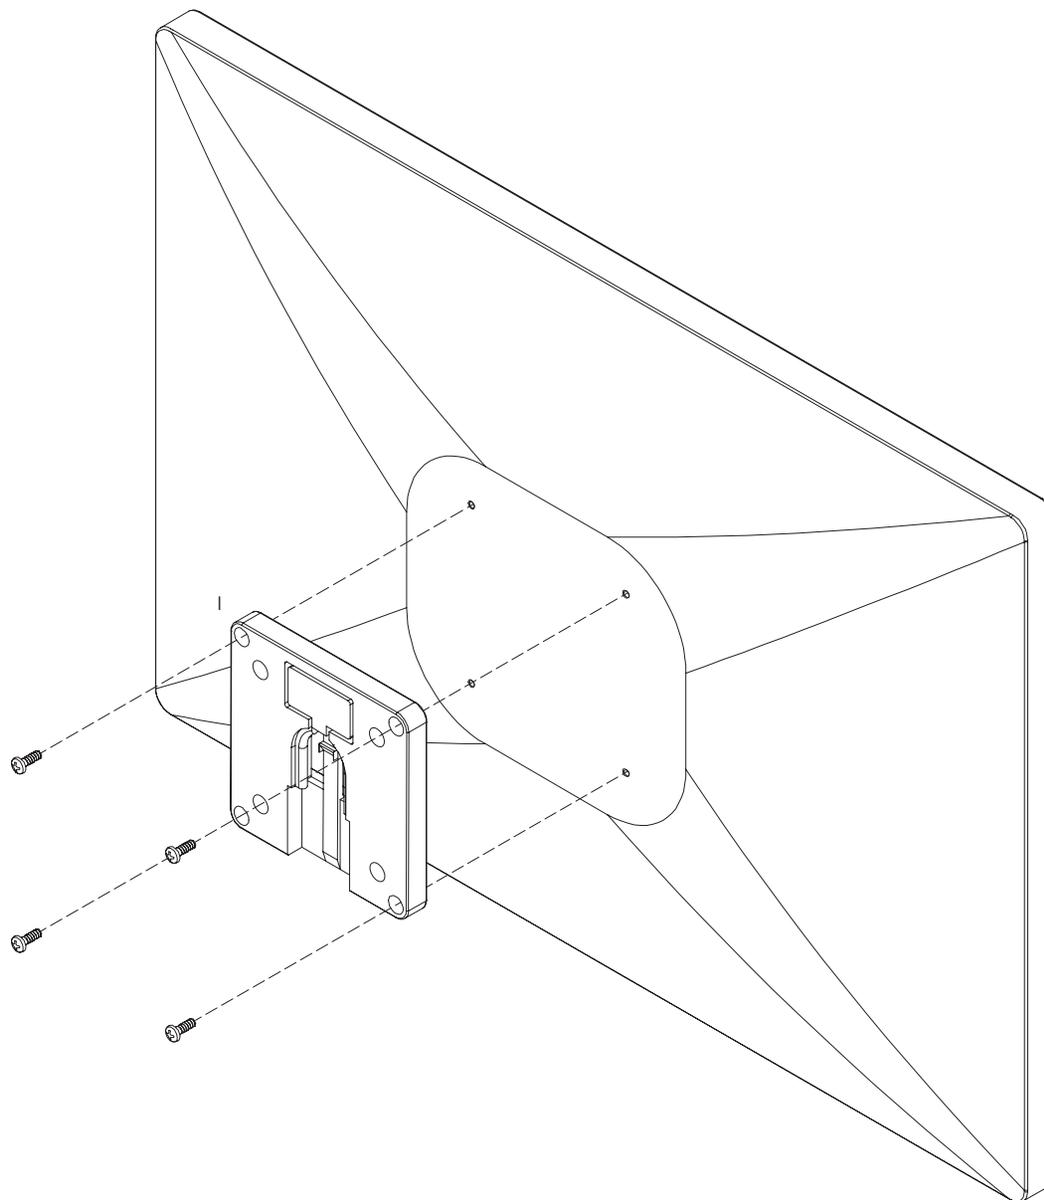

2x

