

# INSTALLATION INSTRUCTIONS

## TRUSS/POLE KIT

TPK-4 

The TPK-4 includes four clamps for 1" – 2" OD round or square poles.


**WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!**

When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.

The maximum weight to be installed on the clamps is 150 pounds (68.04Kg) for the set.


Unpack and check contents:

- (4) CLAMP, 1" – 2"
- (8) BOLT, hex head, tap, 3/8-16 X 2"
- (8) WASHER, flat, 3/8"

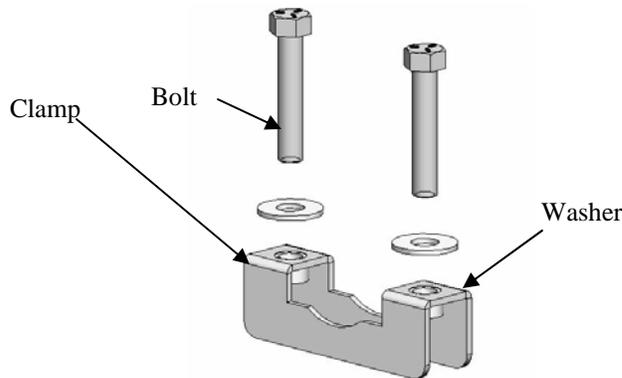

**Figure 1. TPK-4**

1. Place clamp (see Figure 1) on truss or pole (see Figure 2)
2. Using two 3/8-16 X 2" hex head bolts and 3/8" flat washers, secure clamp to device being mounted (**SEE WARNING ABOVE**).
3. Repeat Step 1 and Step 2 for the second clamp.
4. Repeat Step 1 and Step 2 for the third clamp.
5. Repeat Step 1 and Step 2 for the fourth clamp.

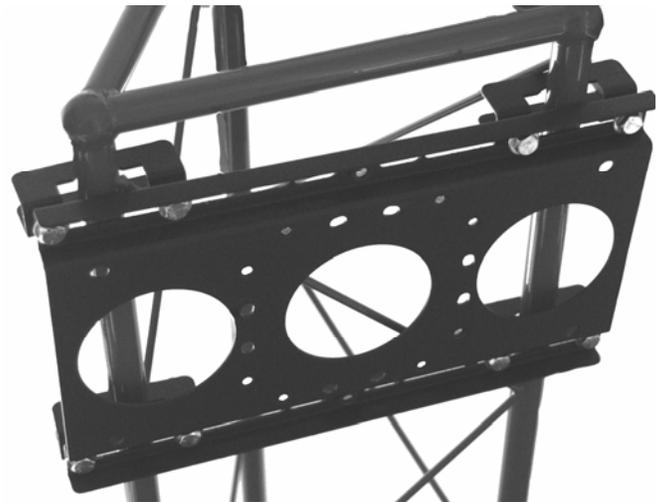

**Figure 2. TPK-4 Truss Mount Example**



**CHIEF MANUFACTURING INC.**  
1-800-582-6480 952-894-6280 FAX 952-894-6918  
12800 HIGHWAY 13 SOUTH, SUITE 500  
SAVAGE, MINNESOTA 55378 USA

8807-000007  
2003 Chief Manufacturing  
[www.chiefmfg.com](http://www.chiefmfg.com)  
06/03