


**Note:** Mount your adjustable keyboard arm to your worksurface and your platform to the arm using the instructions that came with that hardware.


## 1 Raising the Platform

- a** Lift the front edge of the platform to disengage the break system.
- b** Raise the Arm to your desired height.
- c** Lower the front edge of the platform to lock in position.

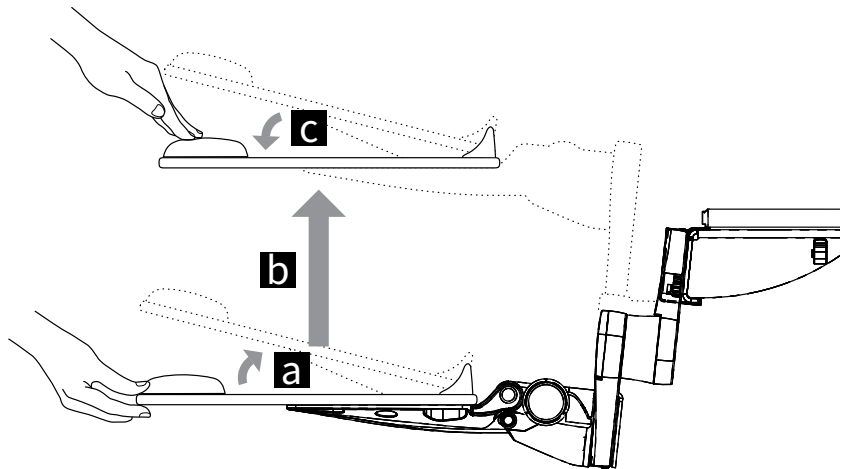

## 2 Lowering the Platform

- a** Lift the front edge of the platform.
- b** Press down on the back edge of the platform to lower to your desired height.
- c** Lower the front edge of the platform to lock in position.

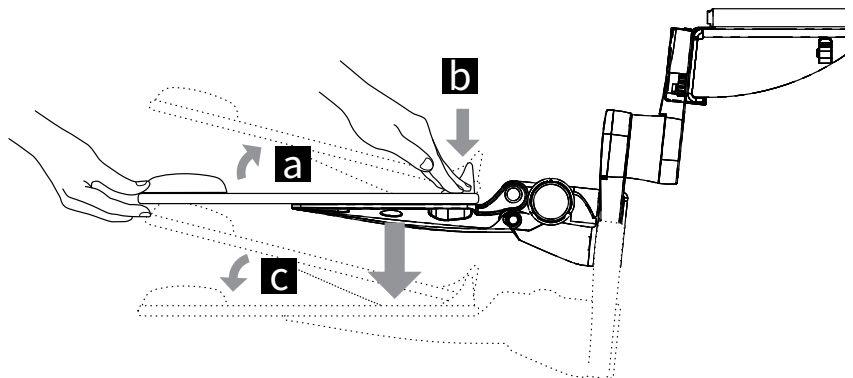


### 3 Adjusting Platform Tilt

To adjust platform toward negative tilt, turn the Tilt Knob “clockwise” until you reach a comfortable tilt angle.


To adjust platform toward positive tilt, turn the knob “counter-clockwise” until you reach a comfortable tilt angle.

**Note:** The tilt gauge located on top of the keyboard arm indicates actual tilt angle. A platform tilt angle between 0° to - 6° is often suggested as a good base for proper wrist position.

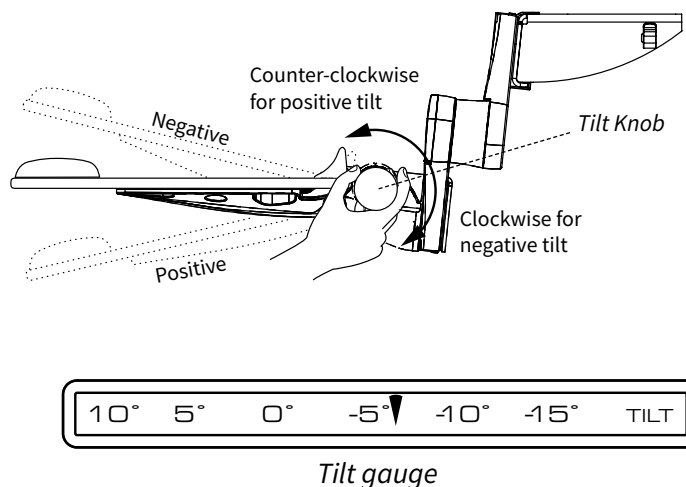

### 4 How to Store

Lower the keyboard platform below the worksurface and track. Push the platform to store under worksurface.

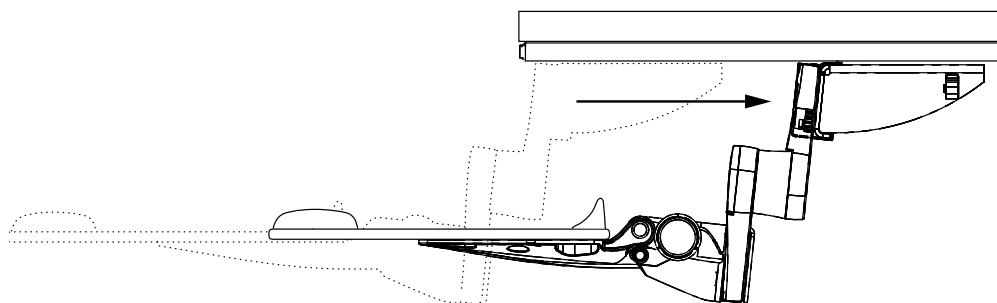

### 5 Consult the User Guide for your Keyboard Platform

Go to [www.workriteergo.com/instructions](http://www.workriteergo.com/instructions) to find your Keyboard Platform User Guide for instructions on how to set up this product for ideal ergonomic benefit.