PLAV70-UNL PLAV70-UNLP(-GB) PLAV70



FEATURES

- Arm extends up to 32.52" (826mm) from wall
- Up to 180° swivel
- +10/-5° of tilt
- ±7° of roll for post installation display leveling
- ±1" (24mm) vertical adjustment located within reach behind display
- Universal models accommodate 42" to 95" displays with mounting hole patterns up to 730 x 405mm (28.75"W x 15.95"H)
- Includes mesh cord sheath and cable ties to neatly manage cables
- Three horizontal arm positions at 2.6" (66mm) centers for flexible lateral display placement

PLA Series Articulating Dual Wall Arm with Vertical Adjustment


For 42" to 95" Displays

Designed to handle the heaviest displays, the PLAV70 features dual-arm, all-steel construction that holds displays up to 95" and weighing up to 200lb. The PLAV70's self-lubricating bushings enable your display to smoothly articulate, while adjustable tilt and pivot allow you to position your display for the optimal viewing angle. Swing, tilt and extend your display, even in and out of recessed cubby holes and custom frames with the vertical adjustment feature that provides the capability to raise or lower your display for a perfectly aligned installation.



Display size: 42"-95'



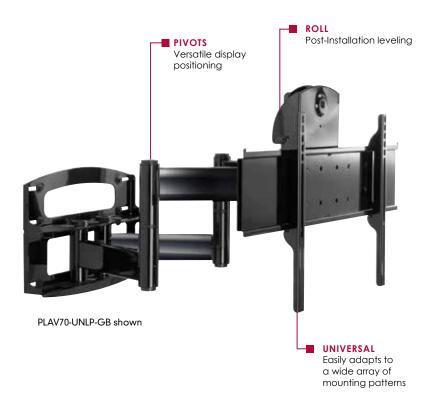



±1" (24mm) vertical adjustment located within reach behind display




Includes mesh cord sheath and cable ties to neatly manage cables











WARRANTY: Limited 5-year Model Numbers

PLAV70-UNL PLAV70-UNLP(-GB) PLAV70 Universal Ariculating Dual Wall Arm with Vertical Adjustment for 42" to 95" Displays (security models) Universal Ariculating Dual Wall Arm with Vertical Adjustment for 42" to 95" Displays (standard models) Dedicated* Ariculating Dual Wall Arm with Vertical Adjustment for 42" to 95" Displays (security models)

Product Specifications

*Requires display-specific adaptor to be purchased separately.

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS	
PLAV70-UNL/-UNLP(-GB)	33.50" x 16.89" x 5.52"-32.52" (851 x 429 x 140-826mm)	631b (28.6kg)	200lb (90kg)	Scratch resistant fused epoxy	PLAV70-UNL: Black PLAV70-UNLP: Black	
PLAV70	19.75" x 21.67" x 4.50"-29.30" (502 x 550 x 114-744mm)	50.5lb (22.9kg)			PLAV70-UNLP-GB: Gloss black PLAV70: Black	


Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PLAV70-UNL/-UNLP(-GB) PLAV70	34.69" x 23.63" x 8" (881.1 x 600 x 203mm) 34.69" x 23.63" x 8" (881.1 x 600 x 203mm)	72.4lb (32.9kg) 58.5lb (26.5kg)	PLAV70-UNL: 73502924335 PLAV70-UNLP: 73502924337 PLAV70-UNLP-GB: 73502924713 PLAV70: 73502924319	s riedin, cable lies, or liversal adaptor pidre, mounting and display attachment hardware	1


Accessories

WSP716. Metal Stud Wall Plate (Triple stud on 16" centers) WSP724: Metal Stud Wall Plate (Triple stud on 16"-24" centers)


All dimensions = inch (mm)









Universal Model Shown







ARCHITECTS SPECIFICATIONS

The Ariculating Dual Wall Arm with Vertical Adjustment shall be Peerless-AV PLAV70/PLAV70-UNL/ PLAV70-UNLP(-GB) models and shall be located where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel with 10° adjustable forward and 5° backward tilt. It shall feature +/-7 degrees of roll. The finish shall be scratch resistant Black or Gloss Black Fused Epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.

Peerless Industries, Inc. ■ 2300 White Oak Circle ■ Aurora, IL 60502 ■ (800) 865-2112 ■ (630) 375-5100 ■ Fax: (800) 359-6500 ■ peerless-av.com

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including flat panel mounts, projector mounts, carts/stands, furniture, cables, display cleaners and a full assortment of accessories.