



MICROPHONE AND RECEIVER LEVEL ADJUSTMENTS


Figure 3

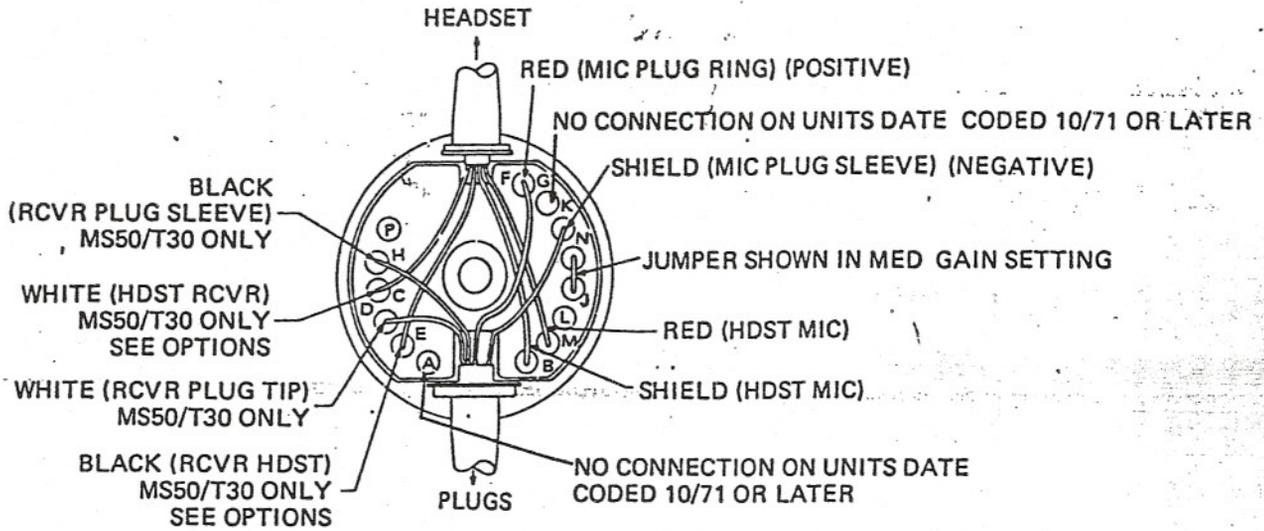

RCVR VOLUME OPTIONS  
MS50/T30 ONLY  
-20 dB SHOWN ON  
MASTER DIAGRAM

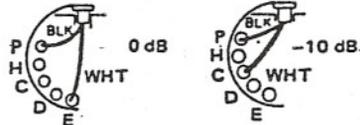

AMP GAIN OPTIONS  
MED. SHOWN ON  
MASTER DIAGRAM



Plantronics headsets with date codes prior to 10-71 may have a squelch option wired in. The squelch must be by-passed if the headset is to be used with the 07066-00 Push-To-Talk switch. This is done by disconnecting the black (MIC plug) lead from terminal G and connecting a jumper wire between terminals G and A. The connector of the black lead removed from terminal G must be insulated with tape or cut off if there will be no future requirement to use the squelch option.

HEADSET SCHEMATIC

Figure 4

