

CTM-MS2

Tilting Mount for Flat-Panels up to 63"



37" - 63"



175 lbs. (79 kg)



2.45" (62mm)




12°



800 x 505mm

NEW

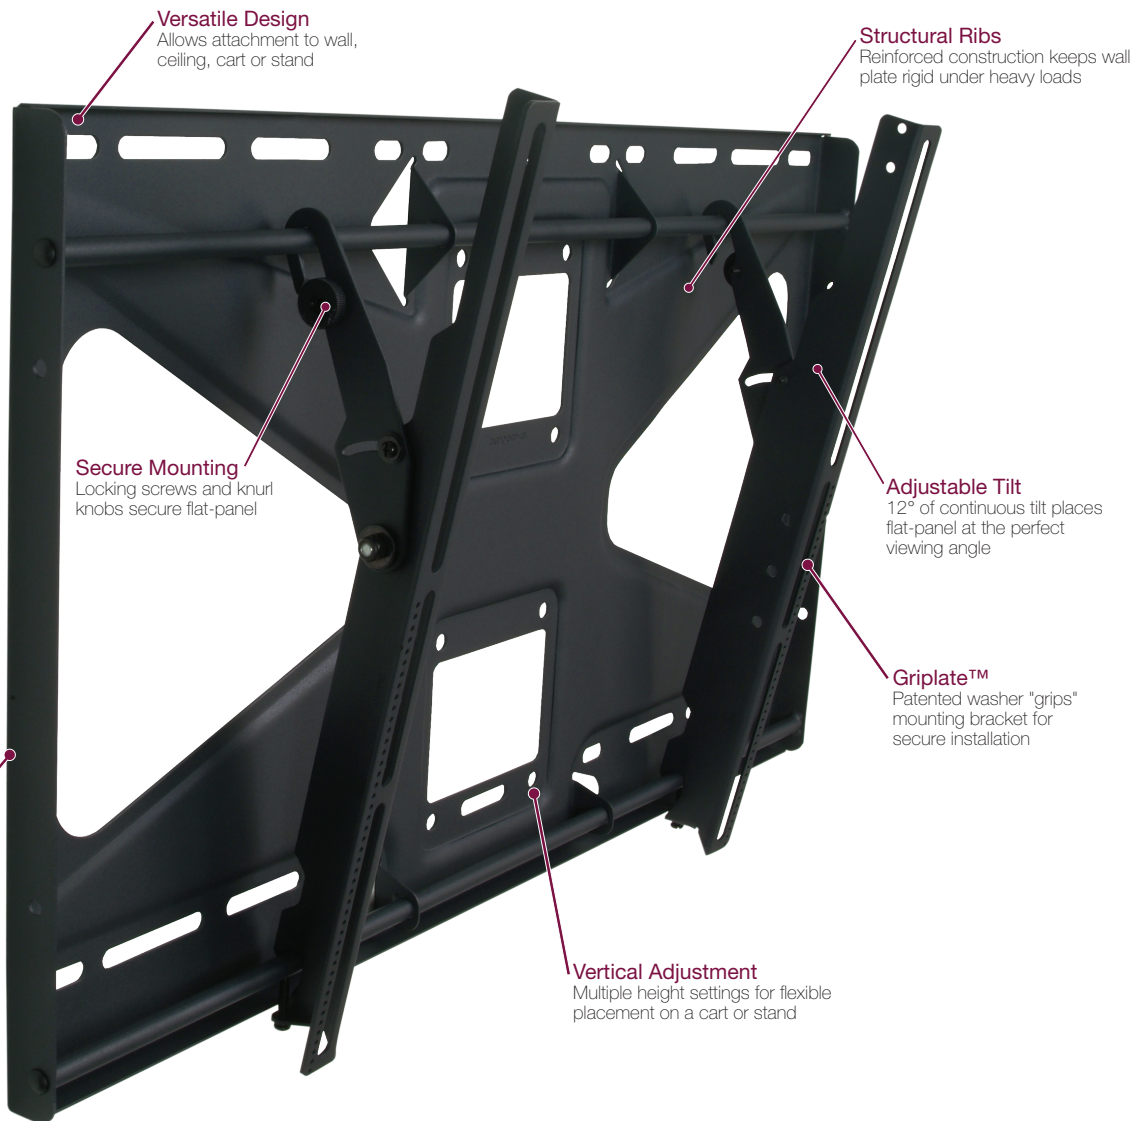

Versatile Design
Allows attachment to wall, ceiling, cart or stand

Structural Ribs
Reinforced construction keeps wall plate rigid under heavy loads

Secure Mounting
Locking screws and knurl knobs secure flat-panel

Adjustable Tilt
12° of continuous tilt places flat-panel at the perfect viewing angle

Lightweight
Redesigned model weighs 20% less than previous version

Griplate™
Patented washer "grips" mounting bracket for secure installation

Vertical Adjustment
Multiple height settings for flexible placement on a cart or stand


FEATURES

- Mounts to walls, floor stands, carts and ceiling adapters
- Features patented Clevis™ technology for effortless tilt
- Three vertical height mounting options for carts and stands
- Patented Griplate™ system holds display securely in place
- Built-in lateral shift
- Extensive hardware pack including exclusive universal spacers
- Cable and power box access
- Now includes PANELock™ theft-resistance system

SPECIFICATIONS

Model	CTM-MS2
Display Range	37"-63"
Weight Capacity	175 lbs. (79 kg)
Depth	2.45" (62mm)
Tilt	12°
Mounting Patterns	200 x 200mm (Min) - 800 x 505mm (Max)



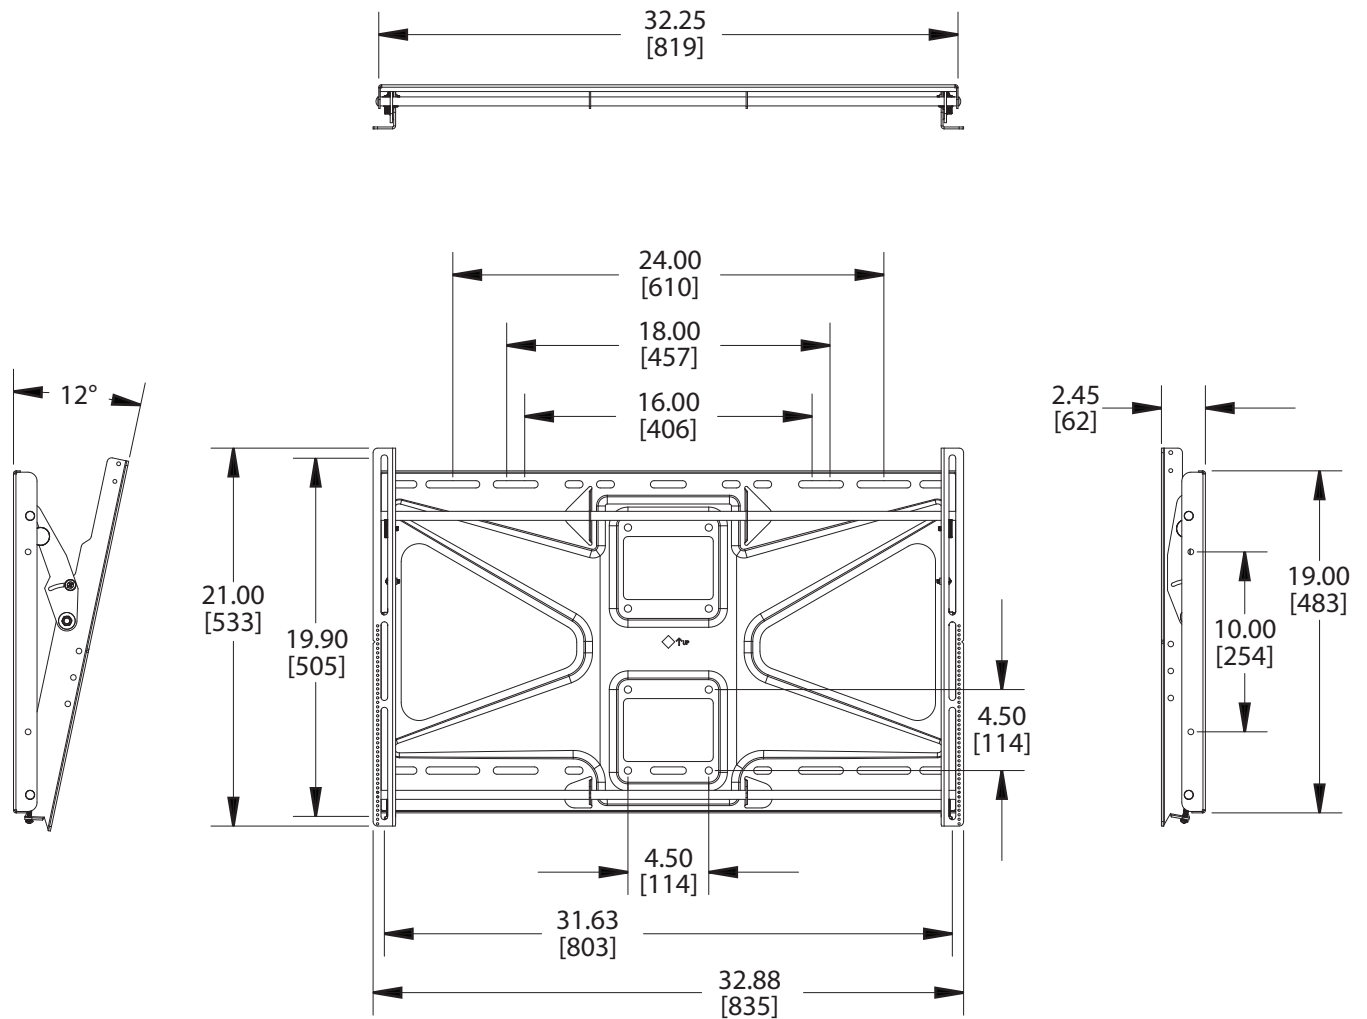

Dimensions in inches and millimeters [mm].
Drawings subject to change without notice.

ACCESSORY OPTIONS

PSD-S

Ceiling Adapter



PCB-CSL1

Cable Lock



FAQ

What if I don't know my mounting pattern?

Check the mount locator tool on www.mounts.com to see a list of compatible mounts or select a universal mount, which fits a broader range of mounting points.

How does this mount to a ceiling?

Use of a PSD-S ceiling adapter allows you to attach to any length of 1.5" NPT or adjustable height suspension adapters.

Why would I pick this over the P4263T?

The unique bolt pattern found in the center of each CTM Series allows for installation on walls, ceiling adapters or floor stands. The P4263T is meant for wall installation only.