

FLAT PANEL MOUNTS

Tilting Wall Mounts

P5080T

Tilting Low-Profile Mount for Flat-Panels up to 80"



50" - 80"



300 lbs. (136 kg)



1.97" (50mm)




8°



1100 x 700mm

NEW

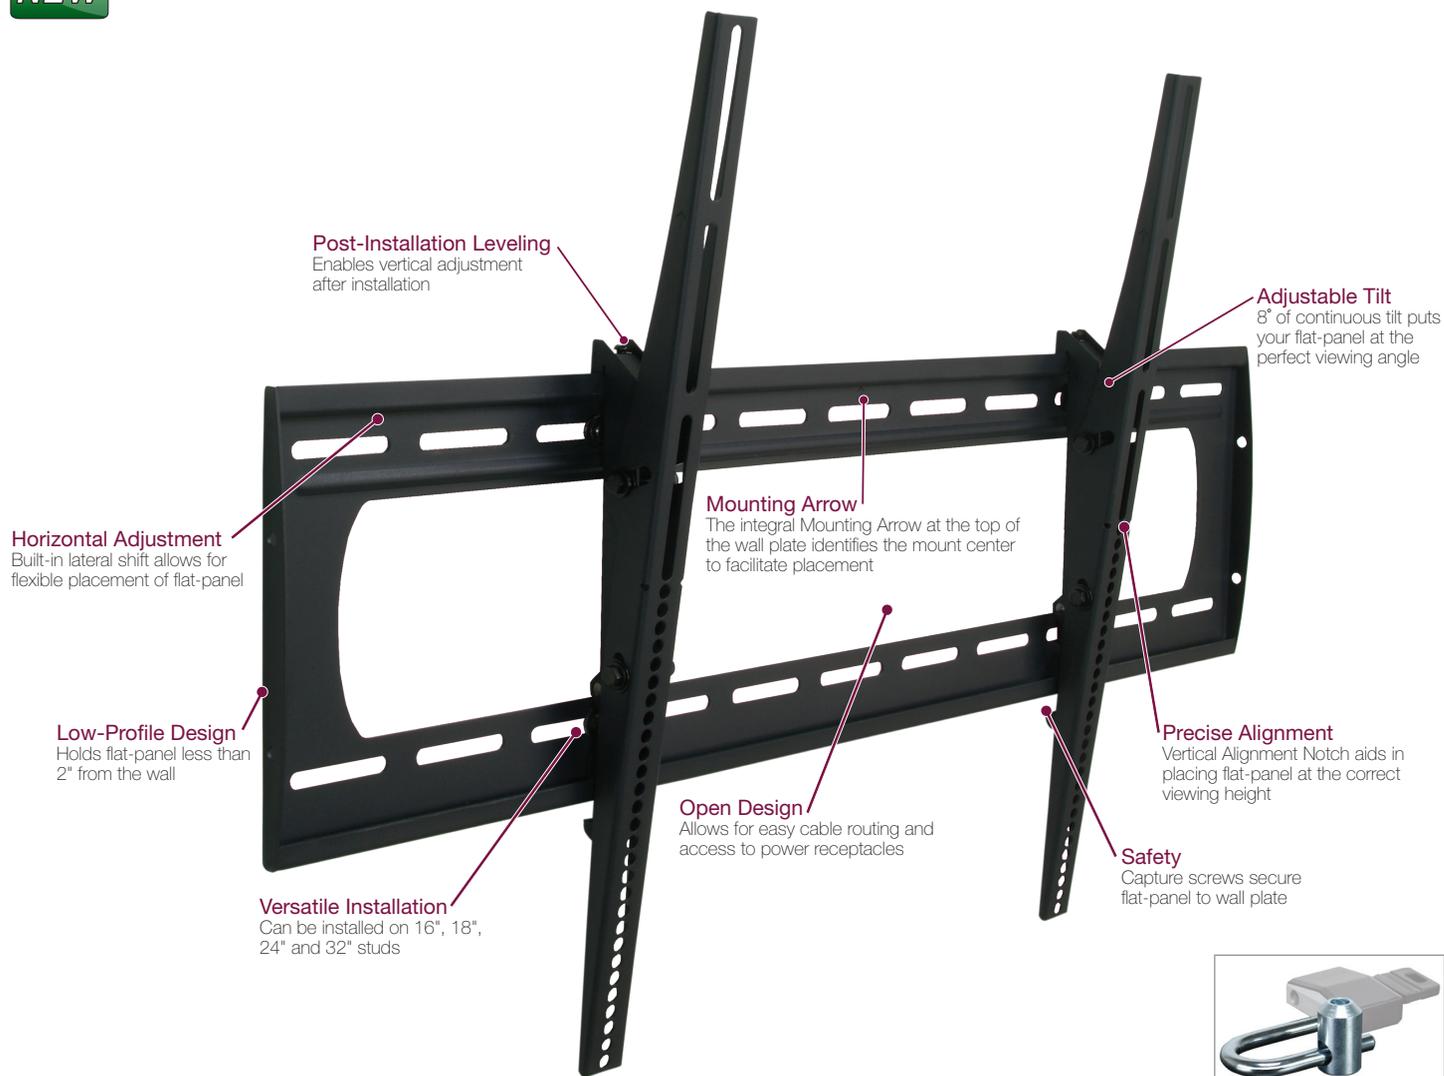

Post-Installation Leveling
Enables vertical adjustment after installation

Adjustable Tilt
8° of continuous tilt puts your flat-panel at the perfect viewing angle

Horizontal Adjustment
Built-in lateral shift allows for flexible placement of flat-panel

Mounting Arrow
The integral Mounting Arrow at the top of the wall plate identifies the mount center to facilitate placement

Low-Profile Design
Holds flat-panel less than 2" from the wall

Precise Alignment
Vertical Alignment Notch aids in placing flat-panel at the correct viewing height

Open Design
Allows for easy cable routing and access to power receptacles

Versatile Installation
Can be installed on 16", 18", 24" and 32" studs

Safety
Capture screws secure flat-panel to wall plate



Includes Lock-It™ Barrel

(Padlock not included)


FEATURES

- Low-profile design
- Post-installation leveling system
- Open design for easy cable and electrical access
- Built-in lateral shift
- Universal hardware pack includes innovative universal spacers and M4-M10 screws
- Mounting kit includes wood, concrete and steel stud attachment hardware

SPECIFICATIONS

Model	P5080T
Display Range	50"-80"
Weight Capacity	300 lbs. (136 kg)
Depth	1.97" (50mm)
Tilt	8°
Mounting Patterns	200 x 200mm (Min) - 1100 x 700mm (Max)



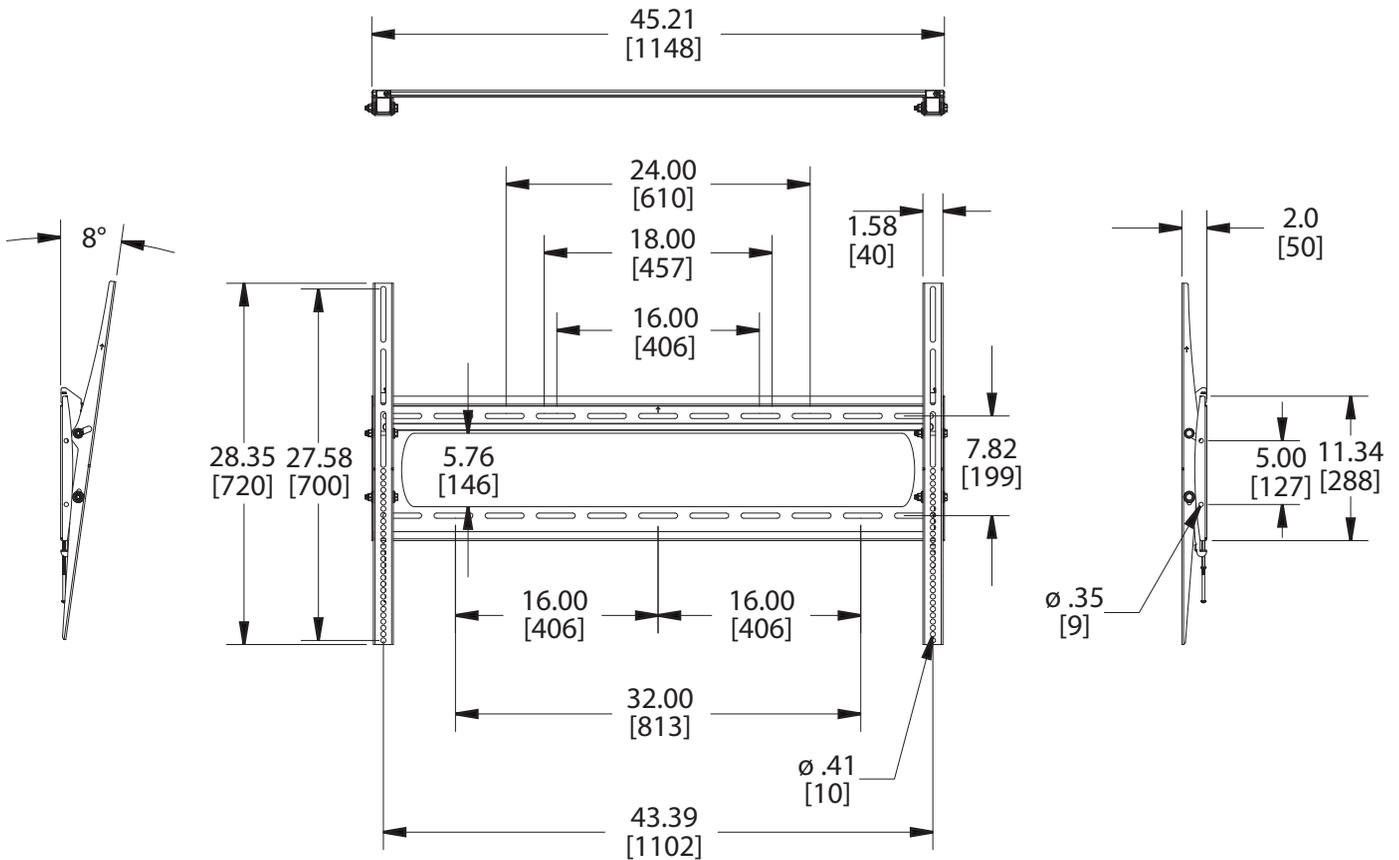

Dimensions in inches and millimeters [mm].
Drawings subject to change without notice.

ACCESSORY OPTIONS

GB-INWAVP

In-wall AV Power GearBox™



PCB-CSL1

Cable Lock



FAQ

What if I don't know my mounting pattern?

Check the mount locator tool on www.mounts.com to see a list of compatible mounts or select a universal mount, which fits a broader range of mounting points.

Does this mount come with concrete anchors?

Yes. Our mounting kit includes hardware for wood, steel and concrete installation - all at no extra charge.

What is "post-installation leveling"?

Screws at the top of each mounting bracket can be independently tightened to slightly adjust the level of the flat-panel after installation, providing a last-minute correction if needed.