
INSTALLATION INSTRUCTIONS

BRACKET SSC-4

The SSC bracket is designed for adding additional security to installations. By installing the SSC, a locking device can be placed to obscure access to fastening hardware.

Unpack and check contents (see Figure 1):

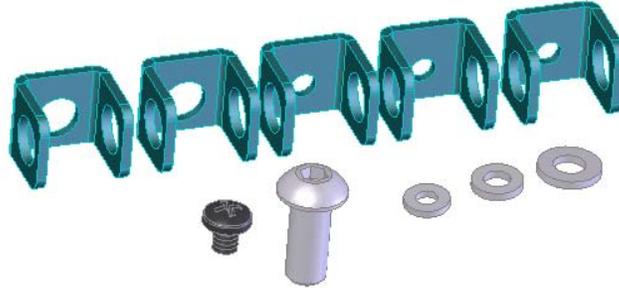


Figure 1.

- | | |
|---|--------------------|
| (2) SSC-3 (5/16" clearance hole) | (1) M4 Flat Washer |
| (3) SSC-1 (#10 clearance hole) | (1) M5 Flat Washer |
| (1) 10-24 x .25" Phillips Head Cap Screw | (1) M6 Flat Washer |
| (1) 5/16-18 x .625" Button Head Cap Screw | (1) 3/16" Hex Key |

1. Remove one of the 10-24 screws from the projector's SLB interface bracket (see Figure 2).

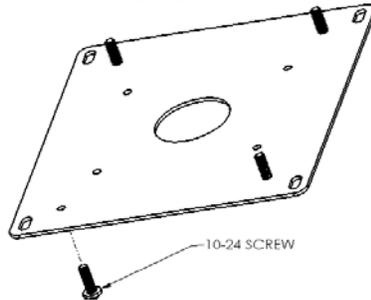


Figure 2.

2. Replace the 5/16" set screw of the RPA projector mount with the supplied 5/16" Button Head Cap Screw and an SSC-3 (see Figure 3).

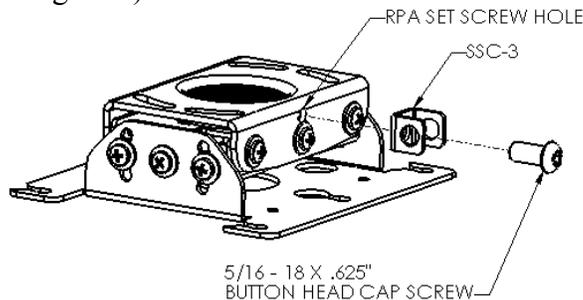


Figure 3.

3. Install an SSC-1 bracket in one pitch and one roll adjustment screw on the RPA projector mount (see Figure 4 & Figure 5).



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
12800 HIGHWAY 13 SOUTH, SUITE 500
SAVAGE, MINNESOTA 55378 USA

8802-000130
2004 Chief Manufacturing
www.chiefmfg.com
01/04

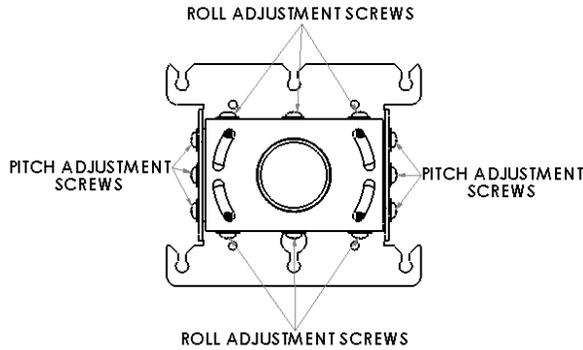


Figure 4.

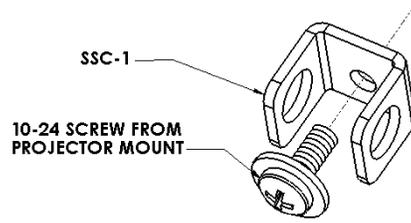


Figure 5.

- Place an SSC-3 bracket on one of the mounting points of the SLB interface bracket (see Figure 6). Depending on the screw size, a flat washer (provided) may be necessary.

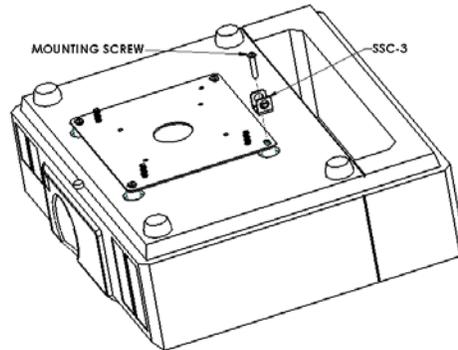


Figure 6.

- Install the projector on the RPA ceiling mount.
- Install the final SSC-1 bracket and 10-24 x .25" screw (provided) into the hole from Step #1 (see Figure 7).

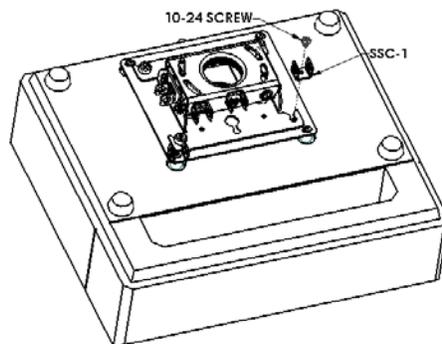


Figure 7.

- Install locking device in each of the SSC brackets or connect all five by a cable, making sure the head of each screw is covered (see Figure 8).



Figure 8.